

GLOBAL  
EDITION



# University Physics

## *with Modern Physics*


Fifteenth Edition in SI Units

Hugh D. Young • Roger A. Freedman



# Practice makes perfect: Guided practice helps students develop into expert problem solvers

The new **15th Edition of *University Physics with Modern Physics, in SI units***, draws on data insights from hundreds of faculty and thousands of student users to address one of the biggest challenges for students in introductory physics courses: seeing the connections between worked examples in their textbook and related homework or exam problems. This edition offers multiple resources to address students' tendency to focus on the objects, situations, numbers, and questions posed in a problem, rather than recognizing the underlying principle or the problem's type. **Mastering™ Physics** gives students instructional support and just-in-time remediation as they work through problems.

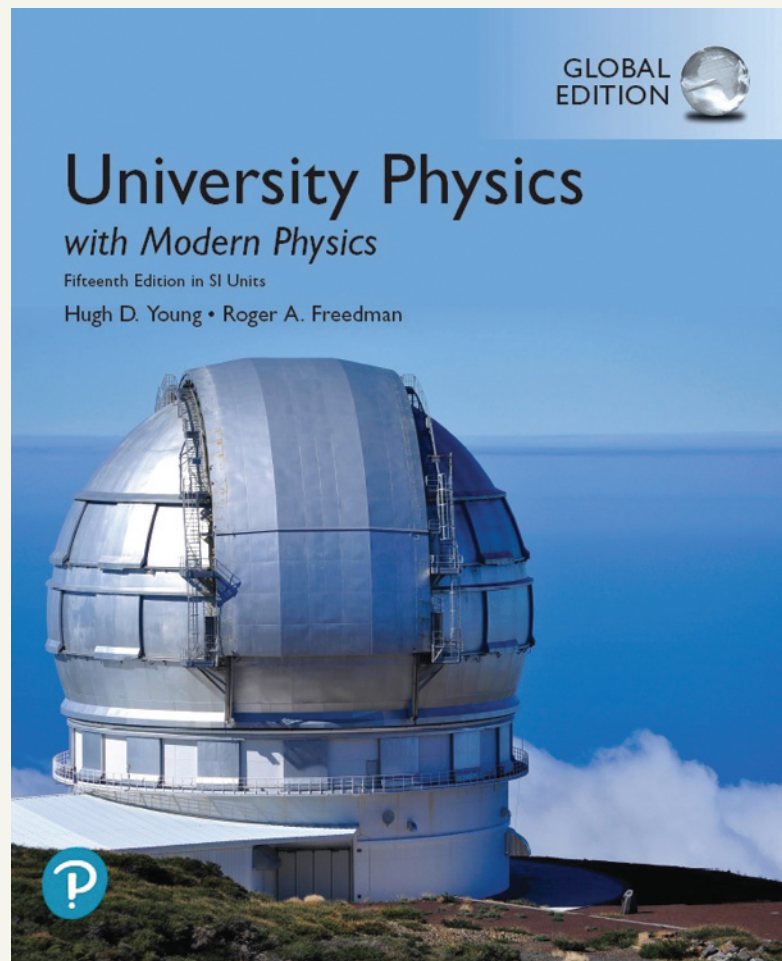

# Guided practice features to help...

## EXAMPLE 7.1 Height of a baseball from energy conservation

WITH **√**ARIATION PROBLEMS

You throw a 0.145 kg baseball straight up, giving it an initial velocity of magnitude 20.0 m/s. Find how high it goes, ignoring air resistance.

**IDENTIFY and SET UP** After the ball leaves your hand, only gravity does work on it. Hence total mechanical energy is conserved, and we can use Eq. (7.4). We take point 1 to be where the ball leaves your hand and point 2 to be where it reaches its maximum height. As in Fig. 7.2, we take the positive  $y$ -direction to be upward. The ball's speed at point 1 is  $v_1 = 20.0$  m/s; at its maximum height it is instantaneously at rest, so  $v_2 = 0$ . We take the origin at point 1, so  $y_1 = 0$  (Fig. 7.4). Our target variable, the distance the ball moves vertically between the two points, is the displacement  $y_2 - y_1 = y_2 - 0 = y_2$ .

**EXECUTE** We have  $y_1 = 0$ ,  $U_{\text{grav},1} = mgy_1 = 0$ , and  $K_2 = \frac{1}{2}mv_2^2 = 0$ . Then Eq. (7.4),  $K_1 + U_{\text{grav},1} = K_2 + U_{\text{grav},2}$ , becomes

$$K_1 = U_{\text{grav},2}$$

As the energy bar graphs in Fig. 7.4 show, this equation says that the kinetic energy of the ball at point 1 is completely converted to gravitational potential energy at point 2. We substitute  $K_1 = \frac{1}{2}mv_1^2$  and  $U_{\text{grav},2} = mgy_2$  and solve for  $y_2$ :


$$\begin{aligned} \frac{1}{2}mv_1^2 &= mgy_2 \\ y_2 &= \frac{v_1^2}{2g} = \frac{(20.0 \text{ m/s})^2}{2(9.80 \text{ m/s}^2)} = 20.4 \text{ m} \end{aligned}$$

**EVALUATE** As a check, use the given value of  $v_1$  and our result for  $y_2$  to calculate the kinetic energy at point 1 and the gravitational potential energy at point 2. You should find that these are equal:  $K_1 = \frac{1}{2}mv_1^2 = 29.0$  J and  $U_{\text{grav},2} = mgy_2 = 29.0$  J. Note that we could have found the result  $y_2 = v_1^2/2g$  by using Eq. (2.13) in the form  $v_2^2 = v_1^2 - 2g(y_2 - y_1)$ .

What if we put the origin somewhere else—for example, 5.0 m below point 1, so that  $y_1 = 5.0$  m? Then the total mechanical energy at point 1 is part kinetic and part potential; at point 2 it's still purely potential because  $v_2 = 0$ . You'll find that this choice of origin yields  $y_2 = 25.4$  m, but again  $y_2 - y_1 = 20.4$  m. In problems like this, you are free to choose the height at which  $U_{\text{grav}} = 0$ . The physics doesn't depend on your choice.

**KEYCONCEPT** Total mechanical energy (the sum of kinetic energy and gravitational potential energy) is conserved when only the force of gravity does work.

Figure 7.4 After a baseball leaves your hand, total mechanical energy  $E = K + U$  is conserved.

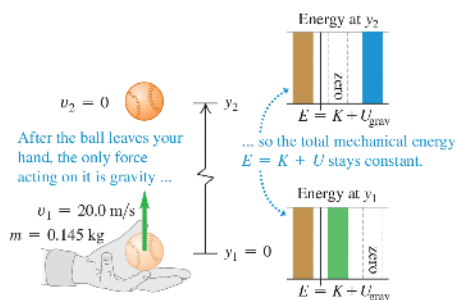

## NEW! Worked Example Key Concept statements

appear at the end of every example, providing a brief summary of the key idea used in the solution to consolidate what was most important and what can be broadly applied to other problems, helping students identify strategies that can be used in future problems.

P. 232

**NEW! Key Example Variation Problems** in the new Guided Practice section at the end of each chapter are based on selected worked examples. They build in difficulty by changing scenarios, swapping the knowns vs. unknowns, and adding complexity and/or steps of reasoning to provide the most helpful range of related problems that students must use the same basic approach to solve. Assignable in Mastering Physics, these “warm-up” exercises help students build problem-solving skills.

## GUIDED PRACTICE

### KEY EXAMPLE **√**ARIATION PROBLEMS

Be sure to review **EXAMPLES 7.1 and 7.2** (Section 7.1) before attempting these problems.

**VP7.2.1** You throw a cricket ball (mass 0.156 kg) vertically upward. It leaves your hand moving at 12.0 m/s. Air resistance can be neglected. At what height above your hand does the ball have (a) half as much upward velocity, (b) half as much kinetic energy as when it left your hand?

**VP7.2.2** You toss a rock of mass  $m$  vertically upward. Air resistance can be neglected. The rock reaches a maximum height  $h$  above your hand. What is the speed of the rock when it is at height (a)  $h/4$  and (b)  $3h/4$ ?

**VP7.2.3** You throw a tennis ball (mass 0.0570 kg) vertically upward. It leaves your hand moving at 15.0 m/s. Air resistance cannot be neglected, and the ball reaches a maximum height of 8.00 m. (a) By how much does the total mechanical energy decrease from when the ball leaves your hand to when it reaches its maximum height? (b) What is the magnitude of the average force of air resistance?

**VP7.2.4** You catch a volleyball (mass 0.270 kg) that is moving downward at 7.50 m/s. In stopping the ball, your hands and the volleyball descend together a distance of 0.150 m. (a) How much work do your hands do on the volleyball in the process of stopping it? (b) What is the magnitude of the force (assumed constant) that your hands exert on the volleyball?

P. 253

# ...develop problem-solving skills

## BRIDGING PROBLEM Entropy Changes: Cold Ice in Hot Water

An insulated container of negligible mass holds 0.600 kg of water at 45.0°C. You put a 0.0500 kg ice cube at -15.0°C in the water (Fig. 20.23). (a) Calculate the final temperature of the water once the ice has melted. (b) Calculate the change in entropy of the system.

### SOLUTION GUIDE


#### IDENTIFY and SET UP

1. Make a list of the known and unknown quantities, and identify the target variables.
2. How will you find the final temperature of the ice–water mixture? How will you decide whether or not all the ice melts?
3. Once you find the final temperature of the mixture, how will you determine the changes in entropy of (i) the ice initially at -15.0°C and (ii) the water initially at 45.0°C?

#### EXECUTE

4. Use the methods of Chapter 17 to calculate the final temperature  $T$ . (*Hint*: First assume that all of the ice melts, then write an equation which says that the heat that flows into the ice equals the heat that flows out of the water. If your assumption is correct, the final temperature that you calculate will be greater than 0°C. If your assumption is incorrect, the final temperature will be 0°C or less, which means that some ice remains. You'll then need to redo the calculation to account for this.)

Figure 20.23 What becomes of this ice–water mixture?

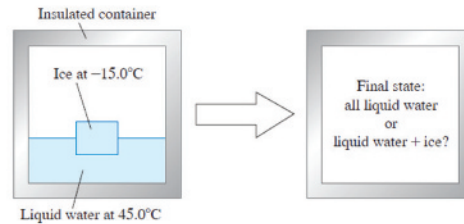

5. Use your result from step 4 to calculate the entropy changes of the ice and the water. (*Hint*: You must include the heat flow associated with temperature changes, as in Example 20.6, as well as the heat flow associated with the change of phase.)
6. Find the total change in entropy of the system.

#### EVALUATE

7. Do the signs of the entropy changes make sense? Why or why not?

P. 699

**NEW! Bridging Problem Tutorials,** now assignable in Mastering Physics, walk students through the problem-solving process and provide links to the eText and detailed Video Tutor Solutions. In the Study Area in Mastering, these Video Tutor Solutions, as well as ones for every Worked Example in the book, provide a virtual teaching assistant on a round-the-clock basis.

## BRIDGING PROBLEM Entropy Changes: Cold Ice in Hot Water

An insulated container of negligible mass holds 0.600 kg of water at 45.0°C. You put a 0.0500-kg ice cube at -15.0°C in the water. (a) Calculate the final temperature of the water once the ice has melted. (b) Calculate the change in entropy of the system.

### IDENTIFY and SET UP


$$Q = mc \Delta T \quad Q = \pm mL$$

$$\Delta S = S_2 - S_1 = \int_1^2 \frac{dQ}{T}$$

$$dQ = mcdT$$

$$\Delta S = S_2 - S_1 = \frac{Q}{T} \quad (\text{isothermal})$$

$$\left\{ \begin{array}{l} L_f = 3.34 \times 10^5 \text{ J/kg} \\ c_w = 4190 \text{ J/(K} \cdot \text{kg)} \\ c_{ice} = 2100 \text{ J/(K} \cdot \text{kg)} \end{array} \right.$$

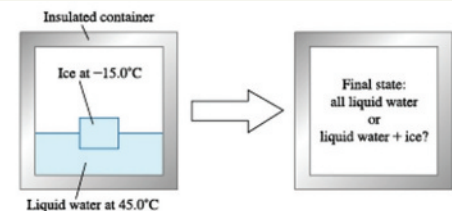

00:57 / 05:09

info




CC



# Develop students' conceptual understanding of physics...

**TEST YOUR UNDERSTANDING OF SECTION 9.1** The figure shows a graph of  $\omega_z$  and  $\alpha_z$  versus time for a particular rotating body. (a) During which time intervals is the rotation speeding up? (i)  $0 < t < 2$  s; (ii)  $2 \text{ s} < t < 4$  s; (iii)  $4 \text{ s} < t < 6$  s. (b) During which time intervals is the rotation slowing down? (i)  $0 < t < 2$  s; (ii)  $2 \text{ s} < t < 4$  s; (iii)  $4 \text{ s} < t < 6$  s.



## ANSWER

(a) (i) and (iii). (ii) The rotation is speeding up when the angular velocity and angular acceleration have the same sign, and slowing down when they have opposite signs. Hence it is speeding up for  $0 < t < 2$  s (both  $\omega_z$  and  $\alpha_z$  are positive) and for  $4 < t < 6$  s (both  $\omega_z$  and  $\alpha_z$  are negative). Note that the body is rotating in one direction for  $t < 4$  s ( $\omega_z$  is positive) and in the opposite direction for  $t > 4$  s ( $\omega_z$  is negative).

P. 305


## Test Your Understanding questions

at the end of most sections let students check their grasp of the material and use a multiple-choice or ranking-task format to probe for common misconceptions. The answers to these questions are now provided immediately after the question in order to encourage students to try them.



**NEW! Direct Measurement Videos** are short videos that show real situations of physical phenomena. Grids, rulers, and frame counters appear as overlays, helping students to make precise measurements of quantities such as position and time. Students then apply these quantities along with physics concepts to solve problems and answer questions about the motion of the objects in the video. These videos are assignable within Mastering.

# ...even before they come to class

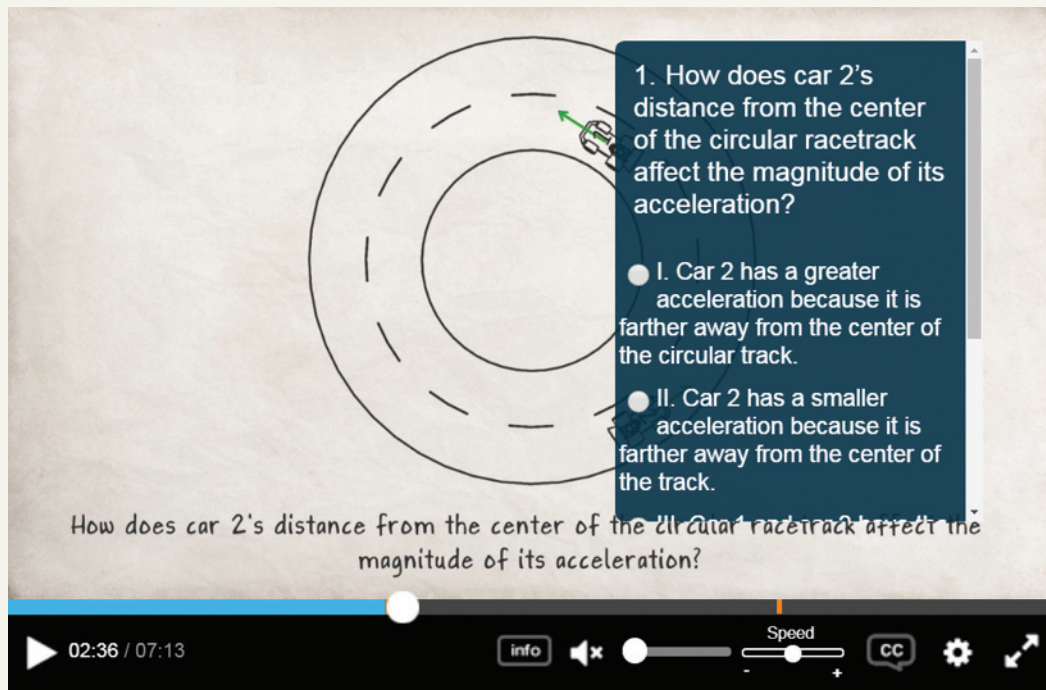

1. How does car 2's distance from the center of the circular racetrack affect the magnitude of its acceleration?

- I. Car 2 has a greater acceleration because it is farther away from the center of the circular track.
- II. Car 2 has a smaller acceleration because it is farther away from the center of the track.

How does car 2's distance from the center of the circular racetrack affect the magnitude of its acceleration?


02:36 / 07:13

## Conceptual Interactive Pre-lecture Videos

provide an introduction to key topics with embedded assessment to help students prepare before lecture and to help professors identify students' misconceptions. These videos are assignable within Mastering.

## NEW! Quantitative Pre-lecture Videos

now complement the conceptual Interactive Pre-lecture Videos designed to expose students to concepts before class and help them learn how problems for a specific concept are worked. These videos are assignable within Mastering.

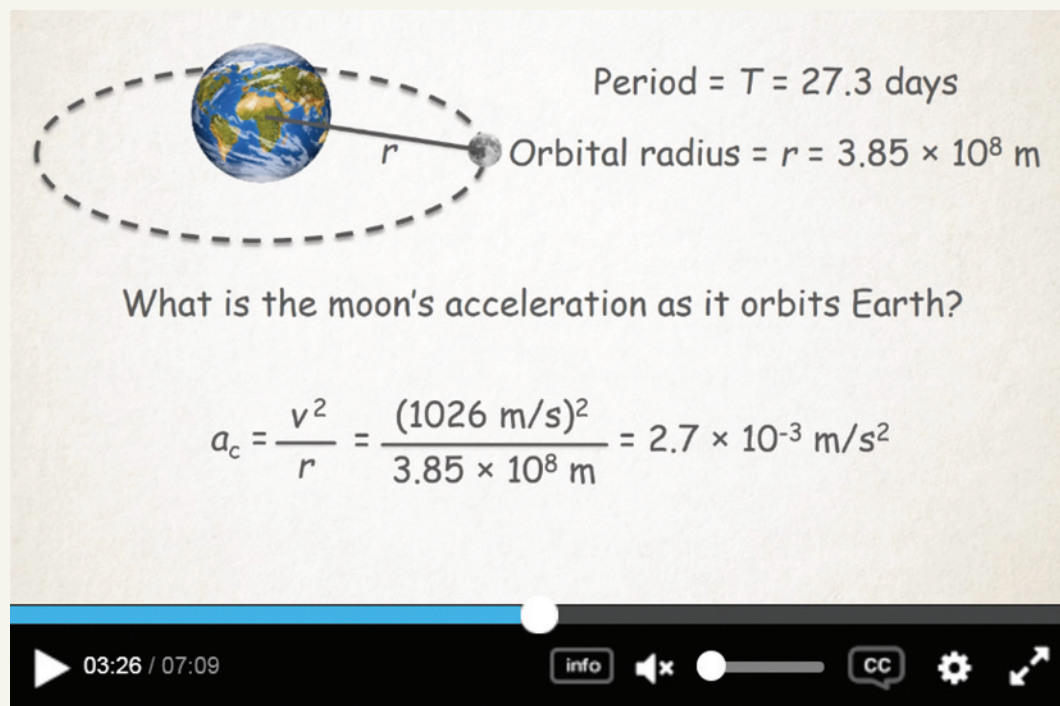

Period =  $T = 27.3$  days

Orbital radius =  $r = 3.85 \times 10^8$  m

What is the moon's acceleration as it orbits Earth?

$$a_c = \frac{v^2}{r} = \frac{(1026 \text{ m/s})^2}{3.85 \times 10^8 \text{ m}} = 2.7 \times 10^{-3} \text{ m/s}^2$$

03:26 / 07:09

# Reach every student...

**NEW! University Physics with Modern Physics, in SI units is now available in Pearson eText.** Pearson eText is a simple-to-use, personalized reading experience available within Mastering. It allows students to easily highlight, take notes, and review key vocabulary all in one place—even when offline. Seamlessly integrated videos engage students and give them access to the help they need when they need it. Pearson eText is available within Mastering when packaged with a new book or as an upgrade students can purchase online.

Figure 6.13 Imparting kinetic energy to a cue ball.

When a billiards player hits a cue ball at rest, the ball's kinetic energy after being hit is equal to the work that was done on it by the cue.



The greater the force exerted by the cue and the greater the distance the ball moves while in contact with it, the greater the ball's kinetic energy.

## The Meaning of Kinetic Energy



Example 6.4 gives insight into the physical meaning of kinetic energy. A particle of mass  $m$  is dropped from rest, and its kinetic energy when it hits the I-beam is equal to the work done on it up to that point by the net force. This result is true in general. The kinetic energy of a particle of mass  $m$  moving with a speed  $v$  must equal the change in kinetic energy from zero to  $K = \frac{1}{2}mv^2$ :

$$W_{\text{tot}} = K - 0 = K$$


So the kinetic energy of a particle is equal to the total work done on it from rest to its present speed (Fig. 6.13). The definition of kinetic energy wasn't chosen at random; it's the *only* definition that agrees with the definition of work and kinetic energy.

In the second part of Example 6.4 the kinetic energy of the ball is equal to the work done on it by the I-beam and drove it into the ground. This gives us another definition of kinetic energy: *The kinetic energy of a particle is equal to the total work done on it during the process of being brought to rest.* This is why you pull your hand back when you catch a ball. As the ball comes to rest, it does an amount of work (equal to the ball's initial kinetic energy) on your hand equal to the ball's initial kinetic energy.

# ...with Mastering Physics

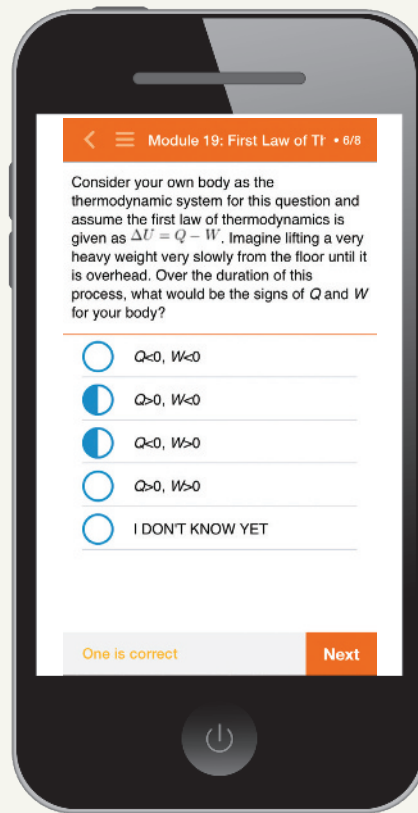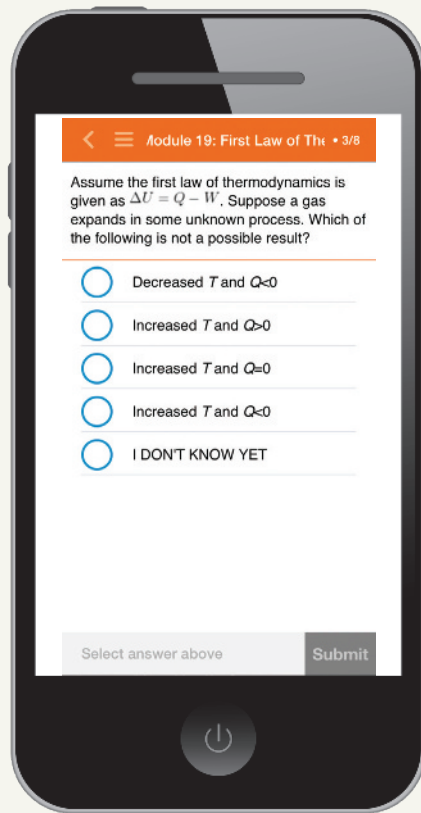


**Dynamic Study Modules** in Mastering Physics help students study effectively—and at their own pace—by keeping them motivated and engaged. The assignable modules rely on the latest research in cognitive science, using methods such as adaptivity, gamification, and intermittent rewards, to stimulate learning and improve retention.

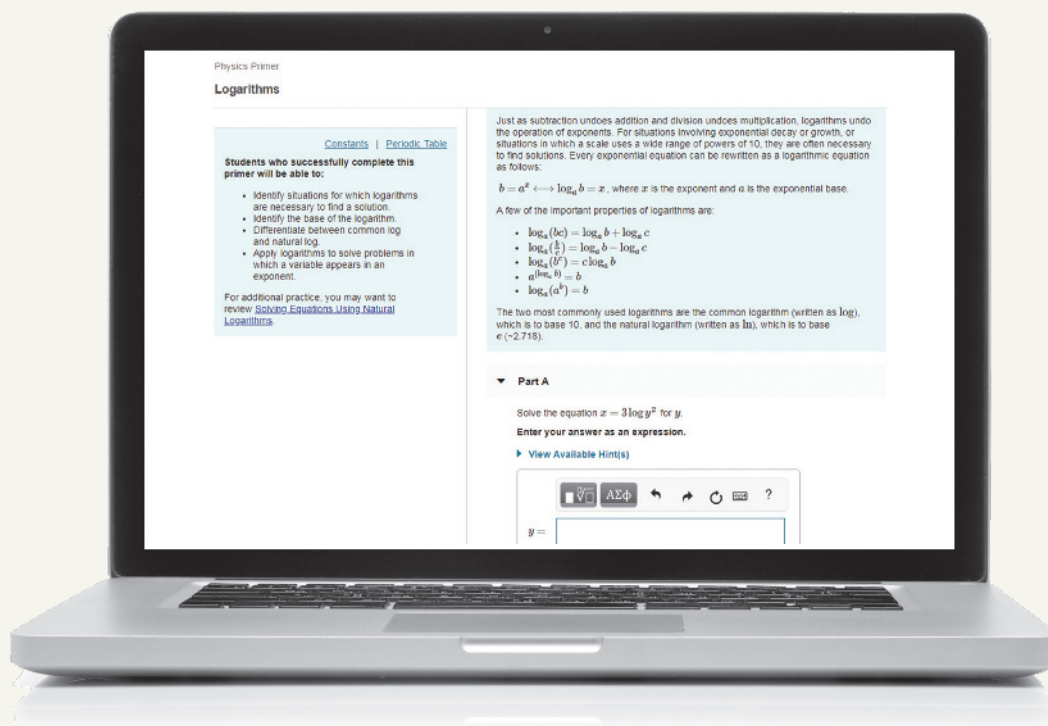


**The Physics Primer** refreshes students' math skills in the context of physics and prepares them for success in the course. These tutorials can be assigned before the course begins or throughout the course as just-in-time remediation. They utilize videos, hints, and feedback to ensure that students can practice and maintain their math skills, while tying together mathematical operations and physics analysis.



# Instructor support you can rely on

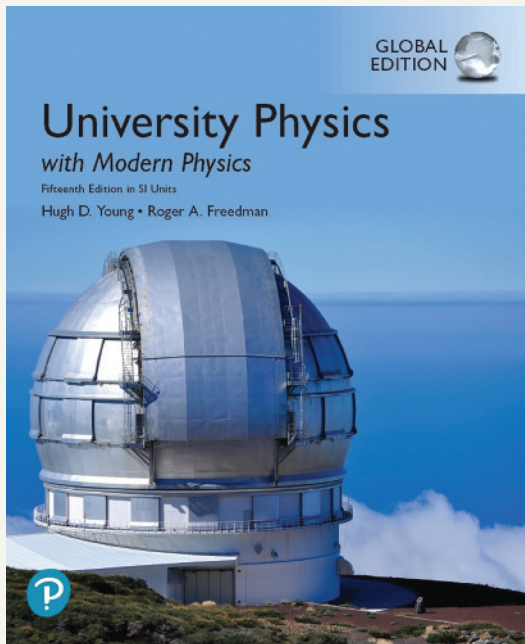

**University Physics with Modern Physics** includes a full suite of instructor support materials in the Instructor Resources area in Mastering Physics. Resources include accessible PowerPoint lecture outlines; all annotated equations and problem-solving strategies; all figures, photos, tables, and end-of-chapter elements from the text; simulations; plus a solutions manual and test bank.

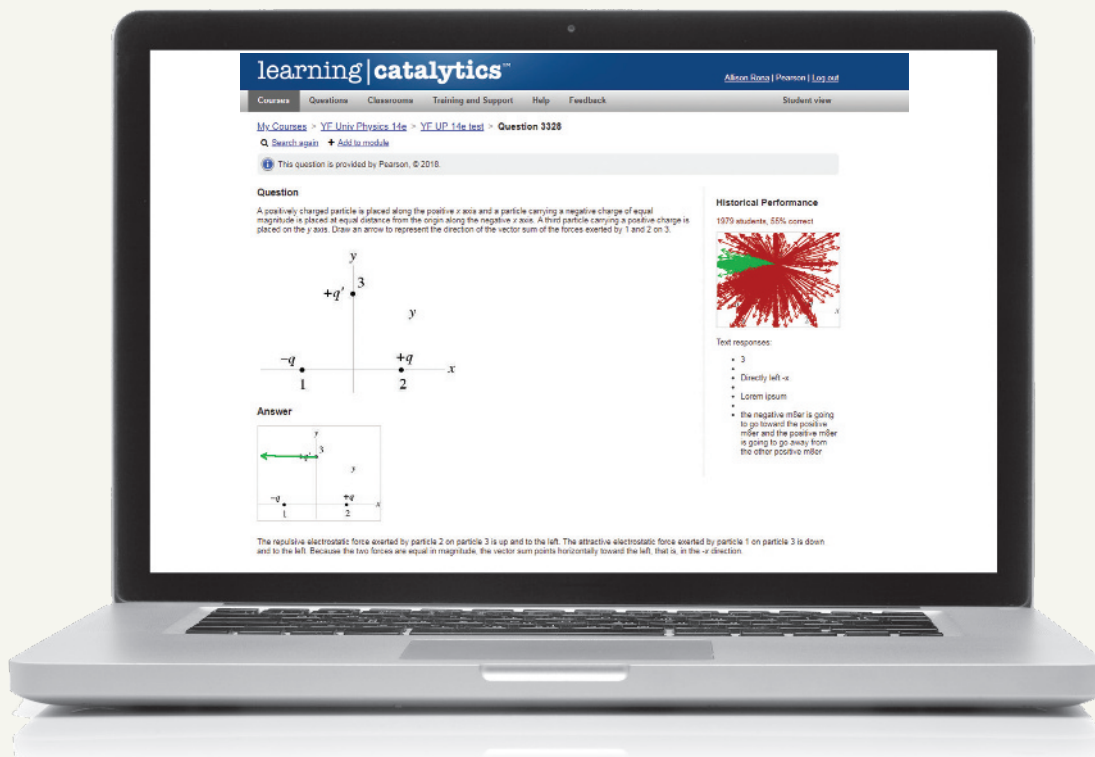

Instructors also have access to **Learning Catalytics**. With Learning Catalytics, you'll hear from every student when it matters most. You pose a variety of questions that help students recall ideas, apply concepts, and develop critical-thinking skills. Your students respond using their own smartphones, tablets, or laptops. You can monitor responses with real-time analytics and find out what your students do—and don't—understand. Then, you can adjust your teaching accordingly and even facilitate peer-to-peer learning, helping students stay motivated and engaged.



SEARS AND ZEMANSKY'S

# UNIVERSITY PHYSICS

WITH MODERN PHYSICS

FIFTEENTH EDITION IN SI UNITS

HUGH D. YOUNG

ROGER A. FREEDMAN

University of California, Santa Barbara

CONTRIBUTING AUTHOR

A. LEWIS FORD

Texas A&M University

SI CONVERSION BY

KATARZYNA ZULETA ESTRUGO

École Polytechnique Fédérale de Lausanne



*Director Physical Science Portfolio:* Jeanne Zalesky  
*Physics and Astronomy Portfolio Analyst:* Ian Desrosiers  
*Senior Content Producer:* Martha Steele  
*Managing Producer:* Kristen Flathman  
*Courseware Director, Content Development:* Barbara Yien  
*Courseware Senior Analyst:* Alice Houston, Ph.D.  
*Courseware Senior Analyst:* Margot Otway  
*Acquisitions Editor, Global Edition:* KK Neelakantan  
*Contributing Editor:* Karen Karlin  
*Courseware Editorial Assistant:* Frances Lai  
*Assistant Project Editor, Global Edition:* Aman Kumar  
*Director, Mastering Physics Content Development:* Amir Said  
*Associate Producer, Science/ECS:* Kristen Sanchez  
*Senior Content Developer (Physics/Astronomy):* David Hoogewerff  
*Rich Media Content Producer:* Keri Rand

*Manager, Media Production:* Vikram Kumar  
*Full-Service Vendor:* Integra Software Services Pvt. Ltd.  
*Copyeditor:* Carol Reitz  
*Compositor:* Integra Software Services Pvt. Ltd.  
*Design Manager:* Mark Ong/Side By Side Studios  
*Interior Designer:* Preston Thomas/Cadence Design  
*Cover Designer:* Lumina Datamatics Ltd.  
*Rights & Permissions Project Manager:* Eric Schrader  
*Rights & Permissions Management:* Ben Ferrini  
*Photo Researchers:* Namrata Aggarwal and Beth Brenzel  
*Manufacturing Buyer:* Stacey Weinberger  
*Senior Manufacturing Controller, Global Edition:* Kay Holman  
*Director, Product Marketing:* Allison Rona  
*Senior Product Marketing Manager:* Elizabeth Bell

---

**Cover Photo Credit:** Hes Mundt/Alamy Stock Photo

*Pearson Education Limited*

KAO Two  
KAO Park  
Harlow  
CM17 9SR  
United Kingdom

and Associated Companies throughout the world

*Visit us on the World Wide Web at:* [www.pearsonglobaleditions.com](http://www.pearsonglobaleditions.com)

© Pearson Education Limited 2020

The rights of Hugh D. Young and Roger A. Freedman to be identified as the authors of this work have been asserted by them in accordance with the Copyright, Designs and Patents Act 1988.

*Authorized adaptation from the United States edition, entitled University Physics with Modern Physics, 15th Edition, ISBN 978-0-135-15955-2 by Hugh D. Young and Roger A. Freedman, published by Pearson Education © 2020.*

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without either the prior written permission of the publisher or a license permitting restricted copying in the United Kingdom issued by the Copyright Licensing Agency Ltd, Saffron House, 6–10 Kirby Street, London EC1N 8TS. For information regarding permissions, request forms and the appropriate contacts within the Pearson Education Global Rights & Permissions department, please visit [www.pearsoned.com/permissions/](http://www.pearsoned.com/permissions/).

All trademarks used herein are the property of their respective owners. The use of any trademark in this text does not vest in the author or publisher any trademark ownership rights in such trademarks, nor does the use of such trademarks imply any affiliation with or endorsement of this book by such owners.

**ISBN 10:** 1-292-31473-7

**ISBN 13:** 978-1-292-31473-0

**eBook ISBN 13:** 978-1-292-31481-5

**British Library Cataloguing-in-Publication Data**

A catalogue record for this book is available from the British Library


## ABOUT THE AUTHORS

---

**Roger A. Freedman** is a Lecturer in Physics at the University of California, Santa Barbara. He was an undergraduate at the University of California campuses in San Diego and Los Angeles and did his doctoral research in nuclear theory at Stanford University under the direction of Professor J. Dirk Walecka. Dr. Freedman came to UCSB in 1981 after three years of teaching and doing research at the University of Washington.

At UCSB, Dr. Freedman has taught in both the Department of Physics and the College of Creative Studies, a branch of the university intended for highly gifted and motivated undergraduates. He has published research in nuclear physics, elementary particle physics, and laser physics. In recent years, he has worked to make physics lectures a more interactive experience through the use of classroom response systems and pre-lecture videos.

In the 1970s Dr. Freedman worked as a comic book letterer and helped organize the San Diego Comic-Con (now the world's largest popular culture convention) during its first few years. Today, when not in the classroom or slaving over a computer, Dr. Freedman can be found either flying (he holds a commercial pilot's license) or with his wife, Caroline, cheering on the rowers of UCSB Men's and Women's Crew.

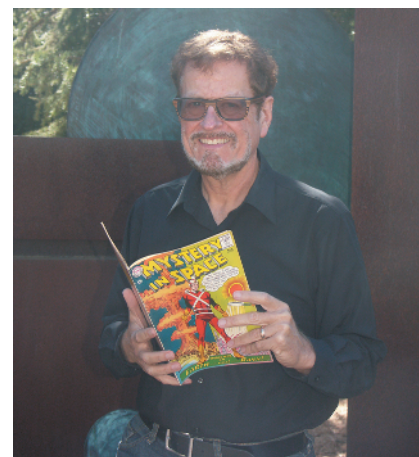

### IN MEMORIAM: HUGH YOUNG (1930–2013)

---

**Hugh D. Young** was Emeritus Professor of Physics at Carnegie Mellon University. He earned both his undergraduate and graduate degrees from that university. He earned his Ph.D. in fundamental particle theory under the direction of the late Richard Cutkosky. Dr. Young joined the faculty of Carnegie Mellon in 1956 and retired in 2004. He also had two visiting professorships at the University of California, Berkeley.

Dr. Young's career was centered entirely on undergraduate education. He wrote several undergraduate-level textbooks, and in 1973 he became a coauthor with Francis Sears and Mark Zemansky of their well-known introductory textbooks. In addition to his role on Sears and Zemansky's *University Physics*, he was the author of Sears and Zemansky's *College Physics*.

Dr. Young earned a bachelor's degree in organ performance from Carnegie Mellon in 1972 and spent several years as Associate Organist at St. Paul's Cathedral in Pittsburgh. He often ventured into the wilderness to hike, climb, or go caving with students in Carnegie Mellon's Explorers Club, which he founded as a graduate student and later advised. Dr. Young and his wife, Alice, hosted up to 50 students each year for Thanksgiving dinners in their home.

Always gracious, Dr. Young expressed his appreciation earnestly: "I want to extend my heartfelt thanks to my colleagues at Carnegie Mellon, especially Professors Robert Kraemer, Bruce Sherwood, Ruth Chabay, Helmut Vogel, and Brian Quinn, for many stimulating discussions about physics pedagogy and for their support and encouragement during the writing of several successive editions of this book. I am equally indebted to the many generations of Carnegie Mellon students who have helped me learn what good teaching and good writing are, by showing me what works and what doesn't. It is always a joy and a privilege to express my gratitude to my wife, Alice, and our children, Gretchen and Rebecca, for their love, support, and emotional sustenance during the writing of several successive editions of this book. May all men and women be blessed with love such as theirs." We at Pearson appreciated his professionalism, good nature, and collaboration. He will be missed.

---



**A. Lewis Ford** is Professor of Physics at Texas A&M University. He received a B.A. from Rice University in 1968 and a Ph.D. in chemical physics from the University of Texas at Austin in 1972. After a one-year postdoc at Harvard University, he joined the Texas A&M physics faculty in 1973 and has been there ever since. Professor Ford has specialized in theoretical atomic physics—in particular, atomic collisions. At Texas A&M he has taught a variety of undergraduate and graduate courses, but primarily introductory physics.

## TO THE STUDENT

# HOW TO SUCCEED IN PHYSICS BY REALLY TRYING

---

*Mark Hollabaugh, Normandale Community College, Emeritus*

Physics encompasses the large and the small, the old and the new. From the atom to galaxies, from electrical circuitry to aerodynamics, physics is very much a part of the world around us. You probably are taking this introductory course in calculus-based physics because it is required for subsequent courses that you plan to take in preparation for a career in science or engineering. Your professor wants you to learn physics and to enjoy the experience. He or she is very interested in helping you learn this fascinating subject. That is part of the reason your professor chose this textbook for your course. That is also the reason Drs. Young and Freedman asked me to write this introductory section. We want you to succeed!

The purpose of this section of *University Physics* is to give you some ideas that will assist your learning. Specific suggestions on how to use the textbook will follow a brief discussion of general study habits and strategies.

## PREPARATION FOR THIS COURSE

If you had high school physics, you will probably learn concepts faster than those who have not because you will be familiar with the language of physics. If English is a second language for you, keep a glossary of new terms that you encounter and make sure you understand how they are used in physics. Likewise, if you are further along in your mathematics courses, you will pick up the mathematical aspects of physics faster. Even if your mathematics is adequate, you may find a book such as Edward Adelson's *Get Ready for Physics* to be a great help for sharpening your math skills as well as your study skills.

## LEARNING TO LEARN

Each of us has a different learning style and a preferred means of learning. Understanding your own learning style will help you to focus on aspects of physics that may give you difficulty and to use those components of your course that will help you overcome the difficulty. Obviously you will want to spend more time on those aspects that give you the most trouble. If you learn by hearing, lectures will be very important. If you learn by explaining, then working with other students will be useful to you. If solving problems is difficult for you, spend more time learning how to solve problems. Also, it is important to understand and develop good study habits. Perhaps the most important thing you can do for yourself is set aside adequate, regularly scheduled study time in a distraction-free environment.

*Answer the following questions for yourself:*

- Am I able to use fundamental mathematical concepts from algebra, geometry, and trigonometry? (If not, plan a program of review with help from your professor.)
- In similar courses, what activity has given me the most trouble? (Spend more time on this.) What has been the easiest for me? (Do this first; it will build your confidence.)
- Do I understand the material better if I read the book before or after the lecture? (You may learn best by skimming the material, going to lecture, and then undertaking an in-depth reading.)
- Do I spend adequate time studying physics? (A rule of thumb for a class like this is to devote, on average, 2.5 hours out of class for each hour in class. For a course that meets 5 hours each week, that means you should spend about 10 to 15 hours per week studying physics.)
- Do I study physics every day? (Spread that 10 to 15 hours out over an entire week!) At what time of the day am I at my best for studying physics? (Pick a specific time of the day and stick to it.)
- Do I work in a quiet place where I can maintain my focus? (Distractions will break your routine and cause you to miss important points.)

## WORKING WITH OTHERS

Scientists or engineers seldom work in isolation from one another but rather work cooperatively. You will learn more physics and have more fun doing it if you work with other students. Some professors may formalize the use of cooperative learning or facilitate the formation of study groups. You may wish to form your own informal study group with members of your class. Use e-mail to keep in touch with one another. Your study group is an excellent resource when you review for exams.

## LECTURES AND TAKING NOTES

An important component of any college course is the lecture. In physics this is especially important, because your professor will frequently do demonstrations of physical principles, run computer simulations, or show video clips. All of these are learning activities that will help you understand the basic principles of physics. Don't miss lectures. If for some reason you do, ask a friend or member of your study group to provide you with notes and let you know what happened.

Take your class notes in outline form, and fill in the details later. It can be very difficult to take word-for-word notes, so just write down key ideas. Your professor may use a diagram from the textbook. Leave a space in your notes and add the diagram later. After class, edit your notes, filling in any gaps or omissions and noting things that you need to study further. Make references to the textbook by page, equation number, or section number.

Ask questions in class, or see your professor during office hours. Remember that the only "dumb" question is the one that is not asked. Your college may have teaching assistants or peer tutors who are available to help you with any difficulties.

## EXAMINATIONS

Taking an examination is stressful. But if you feel adequately prepared and are well rested, your stress will be lessened. Preparing for an exam is a continuous process; it begins the moment the previous exam is over. You should immediately go over the exam to understand any mistakes you made. If you worked a problem and made substantial errors, try this: Take a piece of paper and divide it down the middle with a line from top to bottom. In one column, write the proper solution to the problem. In the other column, write what you did and why, if you know, and why your solution was incorrect. If you are uncertain why you made your mistake or how to avoid making it again, talk with your professor. Physics constantly builds on fundamental ideas, and it is important to correct any misunderstandings immediately. *Warning:* Although cramming at the last minute may get you through the present exam, you will not adequately retain the concepts for use on the next exam.

## TO THE INSTRUCTOR

# PREFACE

---

In the years since it was first published, *University Physics* has always embraced change, not just to include the latest developments in our understanding of the physical world, but also to address our understanding of how students learn physics and how they study.

In preparing for this new Fifteenth Edition, we listened to the thousands of students who have told us that they often struggle to see the connections between the worked examples in their textbook and problems on homework or exams. Every problem seems different because the objects, situations, numbers, and questions posed change with each problem. As a result, students experience frustration and a lack of confidence. By contrast, expert problem-solvers categorize problems by type, based on the underlying principles.

Several of the revisions we have made therefore address this particular challenge by, for example, helping students see the big picture of what each worked example is trying to illustrate and allowing them to practice sets of related problems to help them identify repeating patterns and strategies. These new features are explained in more detail below.

## NEW TO THIS EDITION

- **Worked example KEYCONCEPT statements** appear at the end of every Example and Conceptual Example, providing a brief summary of the key idea used in the solution to consolidate what was most important and what can be broadly applied to other problems, to help students identify strategies that can be used in future problems.
- **KEY EXAMPLE VARIATION PROBLEMS** in the new Guided Practice section at the end of each chapter are based on selected worked examples. They build in difficulty by changing scenarios, swapping the knowns and unknowns, and adding complexity and/or steps of reasoning to provide the most helpful range of related problems that use the same basic approach to solve. These scaffolded problem sets help students see patterns and make connections between problems that can be solved using the same underlying principles and strategies so that they are more able to tackle different problem types when exam time comes.
- **Expanded Caution paragraphs** focus on typical student misconceptions and problem areas. Over a dozen more have been added to this edition based on common errors made in Mastering<sup>TM</sup> Physics.
- **Updated and expanded Application sidebars** give students engaging and relevant real-world context.
- **Based on data from Mastering Physics and feedback from instructors, changes to the homework problems include the following:**
  - **Over 500 new problems**, with scores of other problems revised to improve clarity.
  - **Expanded three-dot-difficulty and Challenge Problems** significantly stretch students by requiring sophisticated reasoning that often involves multiple steps or concepts and/or mathematical skills. Challenge Problems are the most difficult problems in each chapter and often involve calculus, multiple steps that lead students through a complex analysis, and/or the exploration of a topic or application not explicitly covered in the chapter.
  - **New estimation problems** help students learn to analyze problem scenarios, assess data, and work with orders of magnitude. This problem type engages students to more thoroughly explore the situation by requiring them to not only estimate some of the data in the problem but also decide what data need to be estimated based on real-world experience, reasoning, assumptions, and/or modeling.
  - **Expanded cumulative problems** promote more advanced problem-solving techniques by requiring knowledge and skills covered in previous chapters to be integrated with understanding and skills from the current chapter.
  - **Expanded alternative problem sets** in Mastering Physics provide textbook-specific problems from previous editions to assign for additional student practice.

### *Extended Edition, Volume 1, Volume 2, and Volume 3:*

#### *With Mastering Physics:*

- **Extended Edition:** Chapters 1–44 (ISBN 978-1-292-31475-4)

#### *Without Mastering Physics:*

- **Extended Edition:** Chapters 1–44 (ISBN 978-1-292-31473-0)
- **Volume 1:** Chapters 1–20 (ISBN 978-1-292-31733-5)
- **Volume 2:** Chapters 21–37 (ISBN 978-1-292-31735-9)
- **Volume 3:** Chapters 37–44 (ISBN 978-1-292-32526-2)

## KEY FEATURES OF *UNIVERSITY PHYSICS WITH MODERN PHYSICS*



- A **QR code** at the beginning of the new Guided Practice section in each chapter allows students to use a mobile phone to access the Study Area of Mastering Physics, where they can watch interactive videos of a physics professor giving a relevant physics demonstration (Video Tutor Demonstrations) or showing a narrated and animated worked Example (Video Tutor Solutions).
- End-of-chapter **Bridging Problems** provide a transition between the single-concept Examples and the more challenging end-of-chapter problems. Each Bridging Problem poses a difficult, multiconcept problem that typically incorporates physics from earlier chapters. The **Solution Guide** that follows each problem provides questions and hints that help students approach and solve challenging problems with confidence.
- Deep and extensive **problem sets** cover a wide range of difficulty (with blue dots to indicate relative difficulty level) and exercise both physical understanding and problem-solving expertise. Many problems are based on complex real-life situations.
- This textbook offers more **Examples** and **Conceptual Examples** than most other leading calculus-based textbooks, allowing students to explore problem-solving challenges that are not addressed in other textbooks.
- A research-based **problem-solving approach (Identify, Set Up, Execute, Evaluate)** is used in every Example as well as in the Problem-Solving Strategies, in the Bridging Problems, and throughout the Instructor's Solutions Manual. This consistent approach teaches students to tackle problems thoughtfully rather than cutting straight to the math.
- **Problem-Solving Strategies** coach students in how to approach specific types of problems.
- The **figures** use a simplified graphical style to focus on the physics of a situation, and they incorporate blue **explanatory annotations**. Both techniques have been demonstrated to have a strong positive effect on learning.
- Many figures that illustrate Example solutions take the form of black-and-white **pencil sketches**, which directly represent what a student should draw in solving such problems themselves.
- The popular **Caution paragraphs** focus on typical misconceptions and student problem areas.
- End-of-section **Test Your Understanding** questions let students check their grasp of the material and use a multiple-choice or ranking-task format to probe for common misconceptions. Answers are now provided immediately after the question in order to encourage students to try them.
- **Visual Summaries** at the end of each chapter present the key ideas in words, equations, and thumbnail pictures, helping students review more effectively.

Mastering™ is the teaching and learning platform that empowers you to reach *every* student. By combining trusted author content with digital tools developed to engage students and emulate the office-hour experience, Mastering personalizes learning and improves results for each student.

### Reach every student with Mastering

- **Teach your course your way:** Your course is unique. Whether you'd like to foster student engagement during class or give students anytime, anywhere access, Mastering gives you the flexibility to easily create *your* course to fit *your* needs.
  - With **Learning Catalytics**, you'll hear from every student when it matters most. You pose a variety of questions that help students recall ideas, apply concepts, and develop critical-thinking skills. Your students respond using their own smartphones, tablets, or laptops. You can monitor responses with real-time analytics and find out what your students do—and don't—understand. Then you can adjust your teaching accordingly and even facilitate peer-to-peer learning, helping students stay motivated and engaged.



- **Expanded alternative problem sets**, with hundreds of vetted problems from previous editions of the book, provide additional problem-solving practice and offer instructors more options when creating assignments.
- **Empower each learner:** Each student learns at a different pace. Personalized learning, including adaptive tools and wrong-answer feedback, pinpoints the precise areas where each student needs practice and gives all students the support they need—when and where they need it—to be successful.
- **Interactive Pre-lecture Videos** provide an introduction to key topics with embedded assessment to help students prepare before lecture and to help professors identify student misconceptions.
  - **NEW! Quantitative Pre-lecture Videos** now complement the conceptual Interactive Pre-lecture Videos designed to expose students to concepts before class and help them learn how problems for a specific concept are worked.
  - **NEW! Direct Measurement Videos** are short videos that show real situations of physical phenomena. Grids, rulers, and frame counters appear as overlays, helping students to make precise measurements of quantities such as position and time. Students then apply these quantities along with physics concepts to solve problems and answer questions about the motion of the objects in the video. The problems are assignable in Mastering Physics and can be used to replace or supplement traditional word problems; they can also serve as open-ended questions to help develop problem-solving skills.
  - **NEW! Dynamic Study Modules** help students study effectively—and at their own pace. How? By keeping them motivated and engaged. The assignable modules rely on the latest research in cognitive science, using methods—such as adaptivity, gamification, and intermittent rewards—to stimulate learning and improve retention. Each module poses a series of questions about a course topic. These question sets adapt to each student’s performance and offer personalized, targeted feedback to help students master key concepts.
  - **NEW! The Physics Primer** relies on videos, hints, and feedback to refresh students’ math skills in the context of physics and prepares them for success in the course. These tutorials can be assigned before the course begins or throughout the course as just-in-time remediation. They ensure that students practice and maintain their math skills, while tying together mathematical operations and physics analysis.
- **Deliver trusted content:** We partner with highly respected authors to develop interactive content and course-specific resources that keep students on track and engaged.
  - **Video Tutor Demonstrations and Video Tutor Solutions** tie directly to relevant content in the textbook and can be accessed through Mastering Physics, via the eText, or from QR codes in the textbook.
    - **Video Tutor Solutions (VTSs) for most worked examples** in the book walk students through the problem-solving process, providing a virtual teaching assistant on a round-the-clock basis.
    - **Video Tutor Demonstrations (VTDs)** feature “pause-and-predict” demonstrations of key physics concepts and incorporate assessment to engage students in understanding key concepts. New VTDs build on the existing collection, adding new topics for a more robust set of demonstrations.
  - **NEW! Enhanced end-of-chapter questions** provide expanded remediation built into each question when and where students need it. Remediation includes scaffolded support, links to hints, links to appropriate sections of the eText, links from the eText to Mastering Physics, Video Tutor Solutions, math remediation, and wrong-answer feedback for homework assignments.
  - **NEW! Key Example Variation Problems**, assignable in Mastering Physics, build in difficulty by changing scenarios, swapping the knowns and unknowns, and adding complexity and/or steps of reasoning to provide the most helpful range of related problems that use the same basic approach to find their solutions.
  - **NEW! Bridging Problems are now assignable in Mastering Physics**, thus providing students with additional practice in moving from single-concept worked examples to multi-concept homework problems.

- **Improve student results:** Usage statistics show that when you teach with Mastering, student performance improves. That’s why instructors have chosen Mastering for over 15 years, touching the lives of more than 20 million students.

## INSTRUCTIONAL PACKAGE

*University Physics with Modern Physics*, Fifteenth Edition, Global Edition in SI units provides an integrated teaching and learning package of support material for students and instructors.

**NOTE:** For convenience, instructor supplements can be downloaded from the Instructor Resources area of Mastering Physics.

Supplement	Print	Online	Instructor or Student Supplement	Description
Mastering Physics with Pearson eText (ISBN 978-1-292-31475-4)		✓	Instructor and Student Supplement	This product features all of the resources of Mastering Physics in addition to the Pearson eText.
Instructor’s Solutions Manual (ISBN 978-1-292-31474-7)		✓	Instructor Supplement	This comprehensive solutions manual contains complete solutions to all end-of-chapter questions and problems.
Instructor’s Resource Materials		✓	Instructor Supplement	All art, photos, and tables from the book are available in JPEG format and as modifiable PowerPoints™. In addition, instructors can access lecture outlines as well as “clicker” questions in PowerPoint format; editable content for key features, including key equations and Problem-Solving Strategies; and the TestGen test bank.

## ACKNOWLEDGMENTS

I would like to thank the hundreds of reviewers and colleagues who have offered valuable comments and suggestions over the life of this textbook. The continuing success of *University Physics* is due in large measure to their contributions.

Miah Adel (U. of Arkansas at Pine Bluff), Edward Adelson (Ohio State U.), Julie Alexander (Camosun C.), Ralph Alexander (U. of Missouri at Rolla), J. G. Anderson, R. S. Anderson, Wayne Anderson (Sacramento City C.), Sanjeev Arora (Fort Valley State U.), Alex Azima (Lansing Comm. C.), Dilip Balamore (Nassau Comm. C.), Harold Bale (U. of North Dakota), Arun Bansil (Northeastern U.), John Barach (Vanderbilt U.), J. D. Barnett, H. H. Barschall, Albert Bartlett (U. of Colorado), Marshall Bartlett (Hollins U.), Paul Baum (CUNY, Queens C.), Frederick Becchetti (U. of Michigan), B. Bederson, David Bennum (U. of Nevada, Reno), Lev I. Berger (San Diego State U.), Angela Biselli (Fairfield U.), Robert Boeke (William Rainey Harper C.), Bram Boroson (Clayton State U.), S. Borowitz, A. C. Braden, James Brooks (Boston U.), Nicholas E. Brown (California Polytechnic State U., San Luis Obispo), Tony Buffa (California Polytechnic State U., San Luis Obispo), Shane Burns (Colorado C.), A. Capecelatro, Michael Cardamone (Pennsylvania State U.), Duane Carmony (Purdue U.), Troy Carter (UCLA), P. Catranides, John Cerne (SUNY at Buffalo), Shinil Cho (La Roche C.), Tim Chupp (U. of Michigan), Roger Clapp (U. of South Florida), William M. Cloud (Eastern Illinois U.), Leonard Cohen (Drexel U.), W. R. Coker (U. of Texas, Austin), Malcolm D. Cole (U. of Missouri at Rolla), H. Conrad, David Cook (Lawrence U.), Gayl Cook (U. of Colorado), Hans Courant (U. of Minnesota), Carl Covatto (Arizona State U.), Bruce A. Craver (U. of Dayton), Larry Curtis (U. of Toledo), Jai Dahiya (Southeast Missouri State U.), Dedra Demaree (Georgetown U.), Steve Detweiler (U. of Florida), George Dixon (Oklahoma State U.), Steve Drasco (Grinnell C.), Donald S. Duncan, Boyd Edwards (West Virginia U.), Robert Eisenstein (Carnegie Mellon U.), Amy Emerson Missouri (Virginia Institute of Technology), Olena Erhardt (Richland C.), William Faissler (Northeastern U.), Gregory Falabella (Wagner C.), William Fasnacht (U.S. Naval Academy), Paul Feldker (St. Louis Comm. C.), Carlos Figueroa (Cabrillo C.), L. H. Fisher, Neil Fletcher (Florida State U.), Allen Flora (Hood C.), Robert Folk, Peter Fong (Emory U.), A. Lewis Ford (Texas A&M U.), D. Frantszog, James R. Gaines (Ohio State U.), Solomon Gartenhaus (Purdue U.), Ron Gautreau (New Jersey Institute of Technology), J. David Gavenda (U. of Texas, Austin), Dennis Gay (U. of North Florida), Elizabeth George (Wittenberg U.), James Gerhart (U. of Washington), N. S. Gingrich, J. L. Glathart, S. Goodwin, Rich Gottfried (Frederick Comm. C.), Walter S. Gray (U. of Michigan), Paul Gresser (U. of Maryland), Benjamin Grinstein (UC, San Diego), Howard Groth (Pennsylvania State U.), John Gruber (San Jose State U.), Graham D. Gutsche (U.S. Naval Academy), Michael J. Harrison (Michigan State U.), Harold Hart (Western Illinois U.), Howard Hayden (U. of Connecticut), Carl Helrich (Goshen C.), Andrew Hirsch (Purdue U.), Linda Hirst (UC, Merced), Laurent Hodges (Iowa State U.), C. D. Hodgman, Elizabeth Holden (U. of Wisconsin, Platteville), Michael Hones (Villanova U.), Keith Honey (West Virginia Institute of Technology), Gregory Hood (Tidewater Comm. C.), John Hubisz (North Carolina State U.), Eric Hudson (Pennsylvania State U.), M. Iona, Bob Jacobsen (UC, Berkeley), John Jaszczak (Michigan Technical U.), Alvin Jenkins (North Carolina State U.), Charles Johnson (South Georgia State C.), Robert P. Johnson (UC, Santa Cruz), Lorella Jones (U. of Illinois), Manoj Kaplinghat (UC, Irvine), John Karchek (GMI Engineering & Management Institute), Thomas Keil (Worcester Polytechnic Institute), Robert Kraemer (Carnegie Mellon U.), Jean P. Krisch (U. of Michigan), Robert A. Kromhout, Andrew Kunz (Marquette U.), Charles Lane (Berry C.), Stewart Langton (U. of Victoria), Thomas N. Lawrence (Texas State U.), Robert J. Lee, Alfred Leitner (Rensselaer Polytechnic U.), Frederic Liebrand (Walla Walla U.), Gerald P. Lietz (DePaul U.), Gordon Lind (Utah State U.), S. Livingston (U. of Wisconsin, Milwaukee), Jorge Lopez (U. of Texas, El Paso), Elihu Lubkin (U. of Wisconsin, Milwaukee), Robert Luke (Boise State U.), David Lynch (Iowa State U.), Michael Lysak (San Bernardino Valley C.), Jeffrey Mallow (Loyola U.), Robert Mania (Kentucky State U.), Robert Marchina (U. of Memphis), David Markowitz (U. of Connecticut), Philip Matheson (Utah Valley U.), R. J. Maurer, Oren Maxwell (Florida International U.), Joseph L. McCauley (U. of Houston), T. K. McCubbin, Jr. (Pennsylvania State U.), Charles McFarland (U. of Missouri at Rolla), James Mcguire (Tulane U.), Lawrence McIntyre (U. of Arizona), Fredric Messing (Carnegie Mellon U.), Thomas Meyer (Texas A&M U.), Andre Mirabelli (St. Peter's C., New Jersey), Herbert Muether (SUNY, Stony Brook), Jack Munsee (California State U., Long Beach), Lorenzo Narducci (Drexel U.), Van E. Neie (Purdue U.), Forrest Newman (Sacramento City C.), David A. Nordling (U.S. Naval Academy), Benedict Oh (Pennsylvania State U.), L. O. Olsen, Michael Ottinger (Missouri Western State U.), Russell Palma (Minnesota State U., Mankato), Jim Pannell (DeVry Institute of Technology), Neeti Parashar (Purdue U., Calumet), W. F. Parks (U. of Missouri), Robert Paulson (California State U., Chico), Jerry Peacher (U. of Missouri at Rolla), Arnold Perlmutter (U. of Miami), Lennart Peterson (U. of Florida), R. J. Peterson (U. of

Colorado, Boulder), R. Pinkston, Ronald Poling (U. of Minnesota), Yuri Popov (U. of Michigan), J. G. Potter, C. W. Price (Millersville U.), Francis Prosser (U. of Kansas), Sheldon H. Radin, Roberto Ramos (Drexel U.), Michael Rapport (Anne Arundel Comm. C.), R. Resnick, James A. Richards, Jr., John S. Risley (North Carolina State U.), Francesc Roig (UC, Santa Barbara), T. L. Rokoske, Richard Roth (Eastern Michigan U.), Carl Rotter (U. of West Virginia), S. Clark Rowland (Andrews U.), Rajarshi Roy (Georgia Institute of Technology), Russell A. Roy (Santa Fe Comm. C.), Desi Saludes (Hillsborough Comm. C.), Thomas Sandin (North Carolina A&T State U.), Dhiraj Sardar (U. of Texas, San Antonio), Tumer Sayman (Eastern Michigan U.), Bruce Schumm (UC, Santa Cruz), Melvin Schwartz (St. John's U.), F. A. Scott, L. W. Seagondollar, Paul Shand (U. of Northern Iowa), Stan Shepherd (Pennsylvania State U.), Douglas Sherman (San Jose State U.), Bruce Sherwood (Carnegie Mellon U.), Hugh Siefkin (Greenville C.), Christopher Sirola (U. of Southern Mississippi), Tomasz Skwarnicki (Syracuse U.), C. P. Slichter, Jason Slinker (U. of Texas, Dallas), Charles W. Smith (U. of Maine, Orono), Malcolm Smith (U. of Lowell), Ross Spencer (Brigham Young U.), Julien Sprott (U. of Wisconsin), Victor Stanionis (Iona C.), James Stith (American Institute of Physics), Chuck Stone (North Carolina A&T State U.), Edward Strother (Florida Institute of Technology), Conley Stutz (Bradley U.), Albert Stwertka (U.S. Merchant Marine Academy), Kenneth Szpara-DeNisco (Harrisburg Area Comm. C.), Devki Talwar (Indiana U. of Pennsylvania), Fiorella Terenzi (Florida International U.), Martin Tiersten (CUNY, City C.), David Toot (Alfred U.), Greg Trayling (Rochester Institute of Technology), Somdev Tyagi (Drexel U.), Matthew Vannette (Saginaw Valley State U.), Eswara Venugopal (U. of Detroit, Mercy), F. Verbrugge, Helmut Vogel (Carnegie Mellon U.), Aaron Warren (Purdue U., North Central), Robert Webb (Texas A&M U.), Thomas Weber (Iowa State U.), M. Russell Wehr (Pennsylvania State U.), Robert Weidman (Michigan Technical U.), Dan Whalen (UC, San Diego), Lester V. Whitney, Thomas Wiggins (Pennsylvania State U.), Robyn Wilde (Oregon Institute of Technology), David Willey (U. of Pittsburgh, Johnstown), George Williams (U. of Utah), John Williams (Auburn U.), Stanley Williams (Iowa State U.), Jack Willis, Suzanne Willis (Northern Illinois U.), Robert Wilson (San Bernardino Valley C.), L. Wolfenstein, James Wood (Palm Beach Junior C.), Lowell Wood (U. of Houston), R. E. Worley, D. H. Ziebell (Manatee Comm. C.), George O. Zimmerman (Boston U.)

In addition, I would like to thank my past and present colleagues at UCSB, including Rob Geller, Carl Gwinn, Al Nash, Elisabeth Nicol, and Francesc Roig, for their wholehearted support and for many helpful discussions. I owe a special debt of gratitude to my early teachers Willa Ramsay, Peter Zimmerman, William Little, Alan Schwettman, and Dirk Walecka for showing me what clear and engaging physics teaching is all about, and to Stuart Johnson for inviting me to become a coauthor of *University Physics* beginning with the Ninth Edition. Special acknowledgments go out to Lewis Ford for the huge and essential task of creating the revised end-of-chapter problem sets, and to Wayne Anderson, who carefully reviewed all of the new problems and solved them, and updated the *Instructor's Solutions Manual*. Thanks also go to Michael Faux, Elizabeth Holden, and Tom Sandin for their numerous contributions to the end-of-chapter problems. I want to express special thanks to the editorial staff at Pearson: to Jeanne Zalesky for her editorial vision; to Alice Houston for her keen eye and careful development of this edition; to Karen Karlin, Margot Otway, Joanna Dinsmore, and Jason Harlow for their careful reading of the page proofs; and to Martha Steele for keeping the editorial and production pipelines flowing. Most of all, I want to express my gratitude and love to my wife, Caroline, to whom I dedicate my contribution to this book. Hey, Caroline, the new edition's done at last—let's go flying!

## PLEASE TELL ME WHAT YOU THINK!

I welcome communications from students and professors, especially concerning errors or deficiencies that you find in this edition. The late Hugh Young and I have devoted a lot of time and effort to writing the best book we know how to write, and I hope it will help as you teach and learn physics. In turn, you can help me by letting me know what still needs to be improved! Please feel free to contact me either electronically or by ordinary mail. Your comments will be greatly appreciated.

August 2018

*Roger A. Freedman*  
 Department of Physics  
 University of California, Santa Barbara  
 Santa Barbara, CA 93106-9530  
 airboy@physics.ucsb.edu  
<http://www.physics.ucsb.edu/~airboy/>  
 Twitter: @RogerFreedman

## **ACKNOWLEDGMENTS FOR THE GLOBAL EDITION**

Pearson would like to acknowledge and thank Prof. Katarzyna Zuleta Estrugo for her expert contributions to the Global Edition, and the following for reviewing it:

Harri Arnio (Åbo Akademi University), Justin Evans (University of Manchester), Kenneth Hong Chong Ming (National University of Singapore), and Wang Qinghai (National University of Singapore).

# APPLICATIONS

<b>CHAPTER 1</b>					
Scalar Temperature, Vector Wind	38				
<b>CHAPTER 2</b>					
<b>BIO</b> Testing Humans at High Accelerations	74				
<b>CHAPTER 3</b>					
<b>BIO</b> Horses on a Curved Path	98				
The Moons of Jupiter	110				
Watch Out: Tight Curves Ahead!	112				
Relative Velocities near the Speed of Light	115				
<b>CHAPTER 4</b>					
Sledding with Newton's First Law	133				
Blame Newton's Second Law	144				
<b>CHAPTER 5</b>					
Static Friction and Windshield Wipers	171				
<b>BIO</b> Pollen and Fluid Resistance	175				
<b>BIO</b> Circular Motion in a Centrifuge	182				
<b>CHAPTER 6</b>					
<b>BIO</b> Work and Muscle Fibers	201				
<b>BIO</b> Tendons Are Nonideal Springs	212				
<b>BIO</b> Muscle Power	215				
<b>CHAPTER 7</b>					
<b>BIO</b> Converting Gravitational Potential Energy to Kinetic Energy	231				
<b>BIO</b> Elastic Potential Energy of a Cheetah	240				
Nonconservative Forces and Internal Energy in a Tire	246				
Topography and Potential Energy Gradient	249				
Acrobats in Equilibrium	251				
<b>CHAPTER 8</b>					
<b>BIO</b> Woodpecker Impulse	265				
Finding Planets Beyond Our Solar System	284				
<b>BIO</b> Jet Propulsion in Squids	285				
<b>CHAPTER 9</b>					
<b>BIO</b> Rotational Motion in Bacteria	305				
<b>BIO</b> Moment of Inertia of a Bird's Wing	311				
<b>CHAPTER 10</b>					
<b>BIO</b> Combined Translation and Rotation	337				
<b>BIO</b> Rolling for Reproduction	342				
<b>CHAPTER 11</b>					
<b>BIO</b> Young's Modulus of a Tendon	374				
<b>BIO</b> Bulk Stress on an Anglerfish	376				
<b>CHAPTER 12</b>					
<b>BIO</b> Liquid Cohesion in Trees	395				
<b>BIO</b> Gauge Pressure of Blood	399				
<b>BIO</b> Why Healthy Giraffes Have High Blood Pressure	407				
<b>BIO</b> Listening for Turbulent Flow	411				
<b>CHAPTER 13</b>					
Walking and Running on the Moon	428				
<b>BIO</b> Biological Hazards of Interplanetary Travel	437				
<b>CHAPTER 14</b>					
<b>BIO</b> Wing Frequencies	458				
<b>BIO</b> Forced Oscillations	480				
<b>BIO</b> Canine Resonance	481				
<b>CHAPTER 15</b>					
<b>BIO</b> Waves on a Snake's Body	493				
<b>BIO</b> Eating and Transverse Waves	505				
<b>BIO</b> Surface Waves and the Swimming Speed of Ducks	506				
<b>CHAPTER 16</b>					
<b>BIO</b> Hearing Loss from Amplified Sound	534				
<b>BIO</b> Resonance and the Sensitivity of the Ear	547				
<b>CHAPTER 17</b>					
<b>BIO</b> Mammalian Body Temperatures	573				
<b>BIO</b> Fur Versus Blubber	590				
<b>CHAPTER 18</b>					
<b>BIO</b> Respiration and the Ideal-Gas Equation	609				
<b>BIO</b> Activation Energy and Moth Activity	627				
<b>CHAPTER 19</b>					
<b>BIO</b> The First Law of Exercise Thermodynamics	647				
<b>BIO</b> Exhaling Adiabatically	658				
<b>CHAPTER 20</b>					
<b>BIO</b> Biological Efficiency	673				
<b>BIO</b> Entropy Changes in a Living Organism	692				
Polymers Coil in Solution	696				
<b>CHAPTER 21</b>					
<b>BIO</b> Electric Forces, Sweat, and Cystic Fibrosis	713				
<b>BIO</b> Sharks and the "Sixth Sense"	718				
<b>BIO</b> A Fish with an Electric Dipole Moment	732				
<b>CHAPTER 22</b>					
<b>BIO</b> Flux Through a Basking Shark's Mouth	751				
<b>BIO</b> Charge Distribution Inside a Nerve Cell	762				
Why Lightning Bolts Are Vertical	764				
<b>CHAPTER 23</b>					
<b>BIO</b> Electrocardiography	783				
<b>BIO</b> Electron Volts and Cancer Radiotherapy	785				
<b>BIO</b> Potential Gradient Across a Cell Membrane	796				
<b>CHAPTER 24</b>					
Touch Screens and Capacitance	815				
Capacitors in the Toolbox	823				
<b>BIO</b> Dielectric Cell Membrane	826				
Smartphones, Capacitors, and Dielectrics	828				
<b>CHAPTER 25</b>					
<b>BIO</b> Resistivity and Nerve Conduction	846				
<b>BIO</b> Danger: Electric Ray!	852				
<b>CHAPTER 26</b>					
<b>BIO</b> Electromyography	883				
<b>BIO</b> Pacemakers and Capacitors	888				
<b>CHAPTER 27</b>					
<b>BIO</b> Spiny Lobsters and Magnetic Compasses	908				
<b>BIO</b> Magnetic Fields of the Body	910				
<b>BIO</b> Magnetic Resonance Imaging	926				
<b>BIO</b> Exercise Machines and the Hall Effect	933				
<b>CHAPTER 28</b>					
Currents and Planetary Magnetism	950				
<b>BIO</b> Magnetic Fields for MRI	957				
<b>BIO</b> Ferro Magnetic Nanoparticles for Cancer Therapy	969				
<b>CHAPTER 29</b>					
<b>BIO</b> Exploring the Brain with Induced emfs	982				
Eddy Currents Help Power Io's Volcanoes	998				
<b>CHAPTER 30</b>					
Inductors, Power Transmission, and Lightning Strikes	1020				
A Magnetic Eruption on the Sun	1025				
<b>CHAPTER 31</b>					
<b>BIO</b> Measuring Body Fat by Bioelectric Impedance Analysis	1056				
<b>BIO</b> Dangers of ac Versus dc Voltages	1064				
When dc Power Transmission Is Better than ac	1066				
<b>CHAPTER 32</b>					
<b>BIO</b> Ultraviolet Vision	1080				
<b>BIO</b> Electromagnetic Plane Waves from Space	1086				
<b>BIO</b> Laser Surgery	1091				
<b>CHAPTER 33</b>					
<b>BIO</b> Transparency and Index of Refraction	1110				
Circular Polarization and 3-D Movies	1124				
Birefringence and Liquid Crystal Displays	1125				
<b>BIO</b> Bee Vision and Polarized Light from the Sky	1126				
<b>CHAPTER 34</b>					
Satellite Television Dishes	1145				
Inverting an Inverted Image	1165				
<b>BIO</b> Focusing in the Animal Kingdom	1167				
<b>BIO</b> The Telephoto Eyes of Chameleons	1170				
<b>CHAPTER 35</b>					
<b>BIO</b> Phase Difference, Path Difference, and Localization in Human Hearing	1190				
<b>BIO</b> Interference and Butterfly Wings	1203				
<b>BIO</b> Seeing Below the Surface with Interferometry	1204				
<b>CHAPTER 36</b>					
<b>BIO</b> Detecting DNA with Diffraction	1227				
Bigger Telescope, Better Resolution	1231				
<b>BIO</b> The Airy Disk in an Eagle's Eye	1233				
<b>CHAPTER 37</b>					
Which One's the Grandmother?	1255				
Relative Velocity and Reference Frames	1261				
Monitoring Mass-Energy Conversion	1269				
<b>CHAPTER 38</b>					
<b>BIO</b> Sterilizing with High-Energy Photons	1287				
<b>BIO</b> X-Ray Absorption and Medical Imaging	1290				
Butterfly Hunting with Heisenberg	1297				
<b>CHAPTER 39</b>					
Using Spectra to Analyze an Interstellar Gas Cloud	1314				
<b>BIO</b> Fish Fluorescence	1321				
<b>BIO</b> Blackbody Eyes	1333				
Star Colors and the Planck Radiation Law	1334				
<b>CHAPTER 40</b>					
Particles in a Polymer "Box"	1361				
<b>BIO</b> Electron Tunneling in Enzymes	1370				
<b>CHAPTER 41</b>					
<b>BIO</b> Electron Spins and Dating Human Origins	1409				
<b>BIO</b> Electron Configurations and Bone Cancer Radiotherapy	1417				
X Rays in Forensic Science	1421				
<b>CHAPTER 42</b>					
<b>BIO</b> Molecular Zipper	1438				
<b>BIO</b> Using Crystals to Determine Protein Structure	1443				
<b>BIO</b> Swallow This Semiconductor Device	1459				
<b>CHAPTER 43</b>					
Using Isotopes to Measure Ancient Climate	1472				
<b>BIO</b> Deuterium and Heavy Water Toxicity	1476				
<b>BIO</b> A Radioactive Building	1493				
<b>BIO</b> Making Radioactive Isotopes for Medicine	1498				
<b>CHAPTER 44</b>					
<b>BIO</b> Pair Annihilation in Medical Diagnosis	1514				
<b>BIO</b> Linear Accelerators in Medicine	1516				
<b>BIO</b> A Fossil Both Ancient and Recent	1539				

# DETAILED CONTENTS

## MECHANICS

<b>1</b>	<b>UNITS, PHYSICAL QUANTITIES, AND VECTORS</b>	<b>29</b>		
1.1	The Nature of Physics	29		
1.2	Solving Physics Problems	30		
1.3	Standards and Units	31		
1.4	Using and Converting Units	34		
1.5	Uncertainty and Significant Figures	36		
1.6	Estimates and Orders of Magnitude	38		
1.7	Vectors and Vector Addition	38		
1.8	Components of Vectors	42		
1.9	Unit Vectors	46		
1.10	Products of Vectors	47		
	Summary	53		
	Guided Practice	54		
	Questions/Exercises/Problems	55		
<b>2</b>	<b>MOTION ALONG A STRAIGHT LINE</b>	<b>62</b>		
2.1	Displacement, Time, and Average Velocity	62		
2.2	Instantaneous Velocity	65		
2.3	Average and Instantaneous Acceleration	68		
2.4	Motion with Constant Acceleration	72		
2.5	Freely Falling Objects	78		
2.6	Velocity and Position by Integration	81		
	Summary	84		
	Guided Practice	85		
	Questions/Exercises/Problems	86		
<b>3</b>	<b>MOTION IN TWO OR THREE DIMENSIONS</b>	<b>94</b>		
3.1	Position and Velocity Vectors	94		
3.2	The Acceleration Vector	97		
3.3	Projectile Motion	102		
3.4	Motion in a Circle	109		
3.5	Relative Velocity	112		
	Summary	118		
	Guided Practice	119		
	Questions/Exercises/Problems	120		
<b>4</b>	<b>NEWTON'S LAWS OF MOTION</b>	<b>128</b>		
4.1	Force and Interactions	128		
4.2	Newton's First Law	131		
4.3	Newton's Second Law	135		
4.4	Mass and Weight	140		
4.5	Newton's Third Law	143		
4.6	Free-Body Diagrams	147		
	Summary	148		
	Guided Practice	149		
	Questions/Exercises/Problems	151		
<b>5</b>	<b>APPLYING NEWTON'S LAWS</b>	<b>157</b>		
5.1	Using Newton's First Law: Particles in Equilibrium	157		
5.2	Using Newton's Second Law: Dynamics of Particles	162		
5.3	Friction Forces	169		
5.4	Dynamics of Circular Motion	177		
5.5	The Fundamental Forces of Nature	182		
	Summary	184		
	Guided Practice	185		
	Questions/Exercises/Problems	186		
<b>6</b>	<b>WORK AND KINETIC ENERGY</b>	<b>199</b>		
6.1	Work	199		
6.2	Kinetic Energy and the Work–Energy Theorem	204		
6.3	Work and Energy with Varying Forces	209		
6.4	Power	215		
	Summary	218		
	Guided Practice	219		
	Questions/Exercises/Problems	220		
<b>7</b>	<b>POTENTIAL ENERGY AND ENERGY CONSERVATION</b>	<b>229</b>		
7.1	Gravitational Potential Energy	229		
7.2	Elastic Potential Energy	238		
7.3	Conservative and Nonconservative Forces	243		
7.4	Force and Potential Energy	247		



7.5	Energy Diagrams	250
	Summary	252
	Guided Practice	253
	Questions/Exercises/Problems	254

## 8 MOMENTUM, IMPULSE, AND COLLISIONS 263

8.1	Momentum and Impulse	263
8.2	Conservation of Momentum	269
8.3	Momentum Conservation and Collisions	273
8.4	Elastic Collisions	277
8.5	Center of Mass	281
8.6	Rocket Propulsion	284
	Summary	288
	Guided Practice	289
	Questions/Exercises/Problems	290



## 9 ROTATION OF RIGID BODIES 300

9.1	Angular Velocity and Acceleration	300
9.2	Rotation with Constant Angular Acceleration	305
9.3	Relating Linear and Angular Kinematics	307
9.4	Energy in Rotational Motion	310
9.5	Parallel-Axis Theorem	315
9.6	Moment-of-Inertia Calculations	317
	Summary	319
	Guided Practice	320
	Questions/Exercises/Problems	321

## 10 DYNAMICS OF ROTATIONAL MOTION 330

10.1	Torque	330
10.2	Torque and Angular Acceleration for a Rigid Body	333
10.3	Rigid-Body Rotation About a Moving Axis	336
10.4	Work and Power in Rotational Motion	342
10.5	Angular Momentum	344
10.6	Conservation of Angular Momentum	347

10.7	Gyroscopes and Precession	350
	Summary	353
	Guided Practice	354
	Questions/Exercises/Problems	355

## 11 EQUILIBRIUM AND ELASTICITY 365

11.1	Conditions for Equilibrium	365
11.2	Center of Gravity	366
11.3	Solving Rigid-Body Equilibrium Problems	369
11.4	Stress, Strain, and Elastic Moduli	373
11.5	Elasticity and Plasticity	379
	Summary	381
	Guided Practice	382
	Questions/Exercises/Problems	383

## 12 FLUID MECHANICS 394

12.1	Gases, Liquids, and Density	394
12.2	Pressure in a Fluid	396
12.3	Buoyancy	401
12.4	Fluid Flow	404
12.5	Bernoulli's Equation	406
12.6	Viscosity and Turbulence	410
	Summary	413
	Guided Practice	414
	Questions/Exercises/Problems	415

## 13 GRAVITATION 423

13.1	Newton's Law of Gravitation	423
13.2	Weight	427
13.3	Gravitational Potential Energy	430
13.4	The Motion of Satellites	432
13.5	Kepler's Laws and the Motion of Planets	435
13.6	Spherical Mass Distributions	439
13.7	Apparent Weight and the Earth's Rotation	442
13.8	Black Holes	443
	Summary	447
	Guided Practice	448
	Questions/Exercises/Problems	449

## 14 PERIODIC MOTION 457

14.1	Describing Oscillation	457
14.2	Simple Harmonic Motion	459
14.3	Energy in Simple Harmonic Motion	466
14.4	Applications of Simple Harmonic Motion	470
14.5	The Simple Pendulum	474
14.6	The Physical Pendulum	475
14.7	Damped Oscillations	477
14.8	Forced Oscillations and Resonance	479
	Summary	481
	Guided Practice	483
	Questions/Exercises/Problems	484



**WAVES/ACOUSTICS**

<b>15</b>	<b>MECHANICAL WAVES</b>	<b>492</b>
15.1	Types of Mechanical Waves	492
15.2	Periodic Waves	494
15.3	Mathematical Description of a Wave	497
15.4	Speed of a Transverse Wave	502
15.5	Energy in Wave Motion	506
15.6	Wave Interference, Boundary Conditions, and Superposition	509
15.7	Standing Waves on a String	511
15.8	Normal Modes of a String	514
	Summary	519
	Guided Practice	520
	Questions/Exercises/Problems	521
<b>16</b>	<b>SOUND AND HEARING</b>	<b>529</b>
16.1	Sound Waves	529
16.2	Speed of Sound Waves	534
16.3	Sound Intensity	538
16.4	Standing Sound Waves and Normal Modes	542
16.5	Resonance and Sound	546
16.6	Interference of Waves	548
16.7	Beats	550
16.8	The Doppler Effect	552
16.9	Shock Waves	557
	Summary	559
	Guided Practice	561
	Questions/Exercises/Problems	562

**THERMODYNAMICS**

<b>17</b>	<b>TEMPERATURE AND HEAT</b>	<b>569</b>
17.1	Temperature and Thermal Equilibrium	569
17.2	Thermometers and Temperature Scales	571
17.3	Thermal Expansion	574
17.4	Quantity of Heat	580
17.5	Calorimetry and Phase Changes	583
17.6	Mechanisms of Heat Transfer	589
	Summary	596
	Guided Practice	597
	Questions/Exercises/Problems	598
<b>18</b>	<b>THERMAL PROPERTIES OF MATTER</b>	<b>607</b>
18.1	Equations of State	607
18.2	Molecular Properties of Matter	613
18.3	Kinetic-Molecular Model of an Ideal Gas	616
18.4	Heat Capacities	622
18.5	Molecular Speeds	625

18.6	Phases of Matter	627
	Summary	630
	Guided Practice	631
	Questions/Exercises/Problems	632


<b>19</b>	<b>THE FIRST LAW OF THERMODYNAMICS</b>	<b>641</b>
19.1	Thermodynamic Systems	641
19.2	Work Done During Volume Changes	643
19.3	Paths Between Thermodynamic States	645
19.4	Internal Energy and the First Law of Thermodynamics	646
19.5	Kinds of Thermodynamic Processes	651
19.6	Internal Energy of an Ideal Gas	653
19.7	Heat Capacities of an Ideal Gas	654
19.8	Adiabatic Processes for an Ideal Gas	657
	Summary	660
	Guided Practice	661
	Questions/Exercises/Problems	662





<b>20</b>	<b>THE SECOND LAW OF THERMODYNAMICS</b>	<b>670</b>
20.1	Directions of Thermodynamic Processes	670
20.2	Heat Engines	672
20.3	Internal-Combustion Engines	675
20.4	Refrigerators	677
20.5	The Second Law of Thermodynamics	679
20.6	The Carnot Cycle	681
20.7	Entropy	687
20.8	Microscopic Interpretation of Entropy	693
	Summary	697
	Guided Practice	698
	Questions/Exercises/Problems	699

## ELECTROMAGNETISM

<b>21</b>	<b>ELECTRIC CHARGE AND ELECTRIC FIELD</b>	<b>706</b>			
21.1	Electric Charge	707			
21.2	Conductors, Insulators, and Induced Charges	710			
21.3	Coulomb's Law	713			
21.4	Electric Field and Electric Forces	718			
21.5	Electric-Field Calculations	722			
21.6	Electric Field Lines	728			
21.7	Electric Dipoles	729			
	Summary	734			
	Guided Practice	735			
	Questions/Exercises/Problems	736			
<b>22</b>	<b>GAUSS'S LAW</b>	<b>746</b>			
22.1	Charge and Electric Flux	746			
22.2	Calculating Electric Flux	749			
22.3	Gauss's Law	753			
22.4	Applications of Gauss's Law	757			
22.5	Charges on Conductors	762			
	Summary	766			
	Guided Practice	767			
	Questions/Exercises/Problems	768			
<b>23</b>	<b>ELECTRIC POTENTIAL</b>	<b>775</b>			
23.1	Electric Potential Energy	775			
23.2	Electric Potential	782			
23.3	Calculating Electric Potential	788			
23.4	Equipotential Surfaces	792			
23.5	Potential Gradient	795			
	Summary	798			
	Guided Practice	799			
	Questions/Exercises/Problems	800			
<b>24</b>	<b>CAPACITANCE AND DIELECTRICS</b>	<b>809</b>			
24.1	Capacitors and Capacitance	810			
24.2	Capacitors in Series and Parallel	814			
24.3	Energy Storage in Capacitors and Electric-Field Energy	818			
24.4	Dielectrics	821			
24.5	Molecular Model of Induced Charge	827			
24.6	Gauss's Law in Dielectrics	829			
	Summary	830			
	Guided Practice	831			
	Questions/Exercises/Problems	832			
<b>25</b>	<b>CURRENT, RESISTANCE, AND ELECTROMOTIVE FORCE</b>	<b>840</b>			
25.1	Current	841			
25.2	Resistivity	844			
25.3	Resistance	847			
			25.4	Electromotive Force and Circuits	850
			25.5	Energy and Power in Electric Circuits	856
			25.6	Theory of Metallic Conduction	860
				Summary	863
				Guided Practice	864
				Questions/Exercises/Problems	865
			<b>26</b>	<b>DIRECT-CURRENT CIRCUITS</b>	<b>872</b>
			26.1	Resistors in Series and Parallel	872
			26.2	Kirchhoff's Rules	877
			26.3	Electrical Measuring Instruments	882
			26.4	R-C Circuits	886
			26.5	Power Distribution Systems	891
				Summary	895
				Guided Practice	896
				Questions/Exercises/Problems	897
			<b>27</b>	<b>MAGNETIC FIELD AND MAGNETIC FORCES</b>	<b>906</b>
			27.1	Magnetism	906
			27.2	Magnetic Field	908
			27.3	Magnetic Field Lines and Magnetic Flux	912
			27.4	Motion of Charged Particles in a Magnetic Field	916
			27.5	Applications of Motion of Charged Particles	919
			27.6	Magnetic Force on a Current-Carrying Conductor	921
			27.7	Force and Torque on a Current Loop	925
			27.8	The Direct-Current Motor	930
			27.9	The Hall Effect	932
				Summary	934
				Guided Practice	935
				Questions/Exercises/Problems	936
			<b>28</b>	<b>SOURCES OF MAGNETIC FIELD</b>	<b>946</b>
			28.1	Magnetic Field of a Moving Charge	946
			28.2	Magnetic Field of a Current Element	949

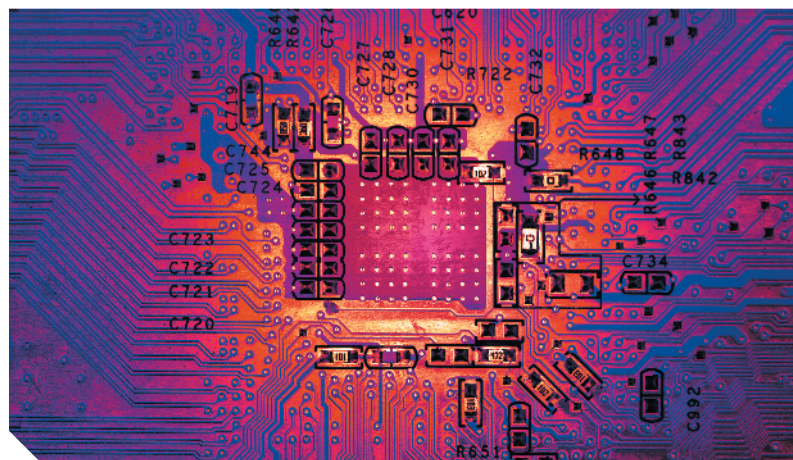

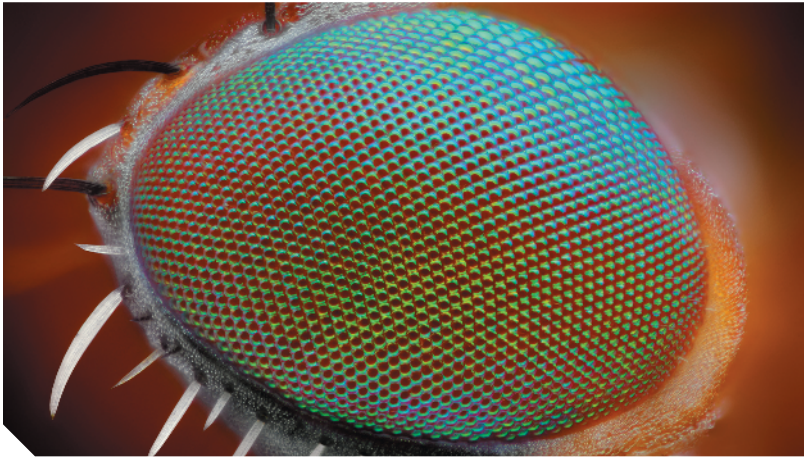28.3	Magnetic Field of a Straight Current-Carrying Conductor	951	32.4	Energy and Momentum in Electromagnetic Waves	1089
28.4	Force Between Parallel Conductors	954	32.5	Standing Electromagnetic Waves	1094
28.5	Magnetic Field of a Circular Current Loop	955		Summary	1097
28.6	Ampere's Law	958		Guided Practice	1098
28.7	Applications of Ampere's Law	961		Questions/Exercises/Problems	1099
28.8	Magnetic Materials	965	<b>OPTICS</b>		
	Summary	970	<hr/>		
	Guided Practice	971	<b>33</b>	<b>THE NATURE AND PROPAGATION OF LIGHT</b>	<b>1105</b>
	Questions/Exercises/Problems	972	33.1	The Nature of Light	1105
<b>29</b>	<b>ELECTROMAGNETIC INDUCTION</b>	<b>981</b>	33.2	Reflection and Refraction	1107
29.1	Induction Experiments	982	33.3	Total Internal Reflection	1113
29.2	Faraday's Law	983	33.4	Dispersion	1116
29.3	Lenz's Law	990	33.5	Polarization	1118
29.4	Motional EMF	993	33.6	Scattering of Light	1125
29.5	Induced Electric Fields	995	33.7	Huygens's Principle	1127
29.6	Eddy Currents	997		Summary	1129
29.7	Displacement Current and Maxwell's Equations	998		Guided Practice	1130
29.8	Superconductivity	1003		Questions/Exercises/Problems	1131
	Summary	1005	<b>34</b>	<b>GEOMETRIC OPTICS</b>	<b>1138</b>
	Guided Practice	1006	34.1	Reflection and Refraction at a Plane Surface	1138
	Questions/Exercises/Problems	1007	34.2	Reflection at a Spherical Surface	1142
<b>30</b>	<b>INDUCTANCE</b>	<b>1016</b>	34.3	Refraction at a Spherical Surface	1150
30.1	Mutual Inductance	1016	34.4	Thin Lenses	1155
30.2	Self-Inductance and Inductors	1020	34.5	Cameras	1163
30.3	Magnetic-Field Energy	1023	34.6	The Eye	1166
30.4	The $R$ - $L$ Circuit	1026	34.7	The Magnifier	1170
30.5	The $L$ - $C$ Circuit	1030	34.8	Microscopes and Telescopes	1171
30.6	The $L$ - $R$ - $C$ Series Circuit	1035		Summary	1176
	Summary	1037		Guided Practice	1177
	Guided Practice	1038		Questions/Exercises/Problems	1178
	Questions/Exercises/Problems	1039	<b>35</b>	<b>INTERFERENCE</b>	<b>1187</b>
<b>31</b>	<b>ALTERNATING CURRENT</b>	<b>1046</b>	35.1	Interference and Coherent Sources	1187
31.1	Phasors and Alternating Currents	1046	35.2	Two-Source Interference of Light	1191
31.2	Resistance and Reactance	1050			
31.3	The $L$ - $R$ - $C$ Series Circuit	1055			
31.4	Power in Alternating-Current Circuits	1059			
31.5	Resonance in Alternating-Current Circuits	1062			
31.6	Transformers	1064			
	Summary	1068			
	Guided Practice	1069			
	Questions/Exercises/Problems	1070			
<b>32</b>	<b>ELECTROMAGNETIC WAVES</b>	<b>1076</b>			
32.1	Maxwell's Equations and Electromagnetic Waves	1076			
32.2	Plane Electromagnetic Waves and the Speed of Light	1080			
32.3	Sinusoidal Electromagnetic Waves	1085			

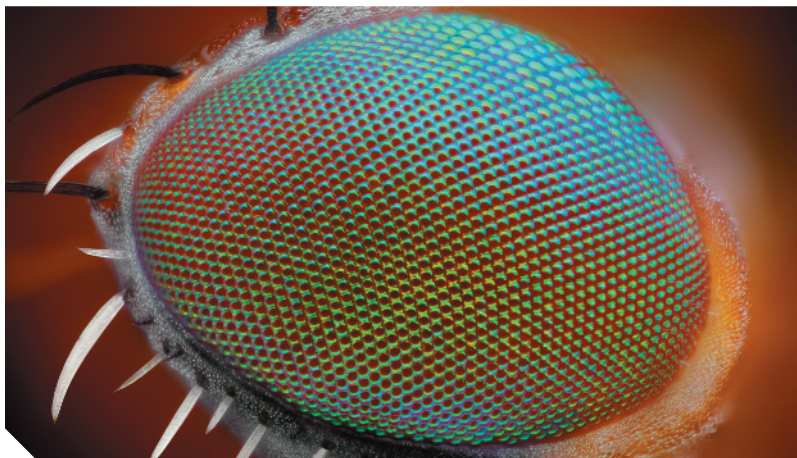

35.3	Intensity in Interference Patterns	1194
35.4	Interference in Thin Films	1198
35.5	The Michelson Interferometer	1203
	Summary	1205
	Guided Practice	1206
	Questions/Exercises/Problems	1207

## 36 DIFFRACTION 1213

36.1	Fresnel and Fraunhofer Diffraction	1213
36.2	Diffraction from a Single Slit	1215
36.3	Intensity in the Single-Slit Pattern	1218
36.4	Multiple Slits	1222
36.5	The Diffraction Grating	1224
36.6	X-Ray Diffraction	1228
36.7	Circular Apertures and Resolving Power	1231
36.8	Holography	1234
	Summary	1236
	Guided Practice	1236
	Questions/Exercises/Problems	1237

## MODERN PHYSICS

### 37 RELATIVITY 1245


37.1	Invariance of Physical Laws	1245
37.2	Relativity of Simultaneity	1248
37.3	Relativity of Time Intervals	1250
37.4	Relativity of Length	1255
37.5	The Lorentz Transformations	1259
37.6	The Doppler Effect for Electromagnetic Waves	1263
37.7	Relativistic Momentum	1265
37.8	Relativistic Work and Energy	1267
37.9	Newtonian Mechanics and Relativity	1271
	Summary	1272
	Guided Practice	1273
	Questions/Exercises/Problems	1274

### 38 PHOTONS: LIGHT WAVES BEHAVING AS PARTICLES 1281

38.1	Light Absorbed as Photons: The Photoelectric Effect	1281
38.2	Light Emitted as Photons: X-Ray Production	1287
38.3	Light Scattered as Photons: Compton Scattering and Pair Production	1290
38.4	Wave-Particle Duality, Probability, and Uncertainty	1293
	Summary	1300
	Guided Practice	1301
	Questions/Exercises/Problems	1302

### 39 PARTICLES BEHAVING AS WAVES 1307

39.1	Electron Waves	1307
39.2	The Nuclear Atom and Atomic Spectra	1313

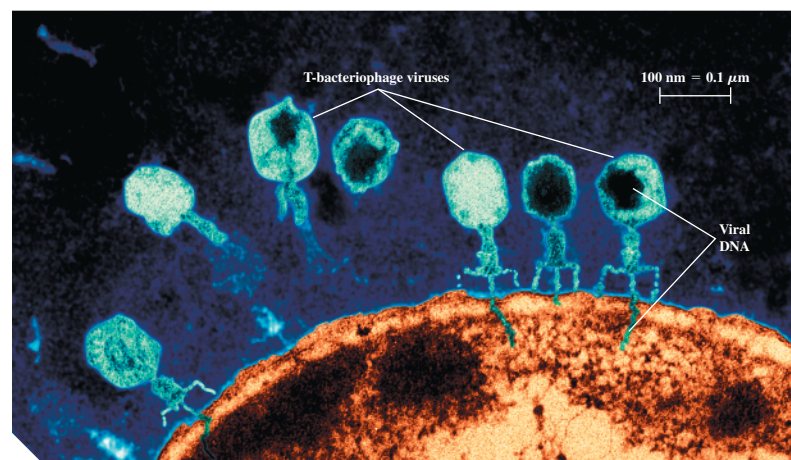

39.3	Energy Levels and the Bohr Model of the Atom	1318
39.4	The Laser	1328
39.5	Continuous Spectra	1331
39.6	The Uncertainty Principle Revisited	1336
	Summary	1339
	Guided Practice	1340
	Questions/Exercises/Problems	1341

### 40 QUANTUM MECHANICS I: WAVE FUNCTIONS 1349

40.1	Wave Functions and the One-Dimensional Schrödinger Equation	1349
40.2	Particle in a Box	1359
40.3	Potential Wells	1364
40.4	Potential Barriers and Tunneling	1368
40.5	The Harmonic Oscillator	1371
40.6	Measurement in Quantum Mechanics	1375
	Summary	1378
	Guided Practice	1379
	Questions/Exercises/Problems	1381

### 41 QUANTUM MECHANICS II: ATOMIC STRUCTURE 1388

41.1	The Schrödinger Equation in Three Dimensions	1388
41.2	Particle in a Three-Dimensional Box	1390
41.3	The Hydrogen Atom	1395
41.4	The Zeeman Effect	1403
41.5	Electron Spin	1406
41.6	Many-Electron Atoms and the Exclusion Principle	1413
41.7	X-Ray Spectra	1420
41.8	Quantum Entanglement	1423
	Summary	1427
	Guided Practice	1428
	Questions/Exercises/Problems	1429

<b>42</b>	<b>MOLECULES AND CONDENSED MATTER</b>	<b>1436</b>	<b>44</b>	<b>PARTICLE PHYSICS AND COSMOLOGY</b>	<b>1511</b>
42.1	Types of Molecular Bonds	1436	44.1	Fundamental Particles—A History	1511
42.2	Molecular Spectra	1439	44.2	Particle Accelerators and Detectors	1516
42.3	Structure of Solids	1443	44.3	Particles and Interactions	1520
42.4	Energy Bands	1446	44.4	Quarks and Gluons	1526
42.5	Free-Electron Model of Metals	1449	44.5	The Standard Model and Beyond	1530
42.6	Semiconductors	1453	44.6	The Expanding Universe	1532
42.7	Semiconductor Devices	1456	44.7	The Beginning of Time	1539
42.8	Superconductivity	1461		Summary	1547
	Summary	1461		Guided Practice	1548
	Guided Practice	1462		Questions/Exercises/Problems	1549
	Questions/Exercises/Problems	1463			
<b>43</b>	<b>NUCLEAR PHYSICS</b>	<b>1470</b>	<b>APPENDICES</b>		
43.1	Properties of Nuclei	1470	A	The International System of Units	A-1
43.2	Nuclear Binding and Nuclear Structure	1475	B	Unit Conversion Factors	A-3
43.3	Nuclear Stability and Radioactivity	1480	C	The British System of Units	A-3
43.4	Activities and Half-Lives	1487	D	Useful Mathematical Relations	A-6
43.5	Biological Effects of Radiation	1491	E	The Greek Alphabet	A-7
43.6	Nuclear Reactions	1493	F	Periodic Table of the Elements	A-8
43.7	Nuclear Fission	1496	G	Numerical Constants	A-9
43.8	Nuclear Fusion	1500		Answers to Odd-Numbered Problems	A-11
	Summary	1503		Credits	C-1
	Guided Practice	1504		Index	I-1
	Questions/Exercises/Problems	1505			

# BRIEF CONTENTS

---

## MECHANICS

---

1	Units, Physical Quantities, and Vectors	29
2	Motion Along a Straight Line	62
3	Motion in Two or Three Dimensions	94
4	Newton's Laws of Motion	128
5	Applying Newton's Laws	157
6	Work and Kinetic Energy	199
7	Potential Energy and Energy Conservation	229
8	Momentum, Impulse, and Collisions	263
9	Rotation of Rigid Bodies	300
10	Dynamics of Rotational Motion	330
11	Equilibrium and Elasticity	365
12	Fluid Mechanics	394
13	Gravitation	423
14	Periodic Motion	457

## WAVES/ACOUSTICS

---

15	Mechanical Waves	492
16	Sound and Hearing	529

## THERMODYNAMICS

---

17	Temperature and Heat	569
18	Thermal Properties of Matter	607
19	The First Law of Thermodynamics	641
20	The Second Law of Thermodynamics	670

## ELECTROMAGNETISM

---

21	Electric Charge and Electric Field	706
22	Gauss's Law	746
23	Electric Potential	775
24	Capacitance and Dielectrics	809
25	Current, Resistance, and Electromotive Force	840
26	Direct-Current Circuits	872

27	Magnetic Field and Magnetic Forces	906
28	Sources of Magnetic Field	946
29	Electromagnetic Induction	981
30	Inductance	1016
31	Alternating Current	1046
32	Electromagnetic Waves	1076

## OPTICS

---

33	The Nature and Propagation of Light	1105
34	Geometric Optics	1138
35	Interference	1187
36	Diffraction	1213

## MODERN PHYSICS

---

37	Relativity	1245
38	Photons: Light Waves Behaving as Particles	1281
39	Particles Behaving as Waves	1307
40	Quantum Mechanics I: Wave Functions	1349
41	Quantum Mechanics II: Atomic Structure	1388
42	Molecules and Condensed Matter	1436
43	Nuclear Physics	1470
44	Particle Physics and Cosmology	1511

## APPENDICES

---

A	The International System of Units	A-1
B	Unit Conversion Factors	A-3
C	The British System of Units	A-3
D	Useful Mathematical Relations	A-6
E	The Greek Alphabet	A-7
F	Periodic Table of the Elements	A-8
G	Numerical Constants	A-9
	Answers to Odd-Numbered Problems	A-11
	Credits	C-1
	Index	I-1



? Tornadoes are spawned by severe thunderstorms, so being able to predict the path of thunderstorms is essential. If a thunderstorm is moving at 15 km/h in a direction  $37^\circ$  north of east, how far north does the thunderstorm move in 2.0 h? (i) 30 km; (ii) 24 km; (iii) 18 km; (iv) 12 km; (v) 9 km.

# 1 Units, Physical Quantities, and Vectors

Physics is one of the most fundamental of the sciences. Scientists of all disciplines use the ideas of physics, including chemists who study the structure of molecules, paleontologists who try to reconstruct how dinosaurs walked, and climatologists who study how human activities affect the atmosphere and oceans. Physics is also the foundation of all engineering and technology. No engineer could design a flat-screen TV, a prosthetic leg, or even a better mousetrap without first understanding the basic laws of physics.

The study of physics is also an adventure. You'll find it challenging, sometimes frustrating, occasionally painful, and often richly rewarding. If you've ever wondered why the sky is blue, how radio waves can travel through empty space, or how a satellite stays in orbit, you can find the answers by using fundamental physics. You'll come to see physics as a towering achievement of the human intellect in its quest to understand our world and ourselves.

In this opening chapter, we'll go over some important preliminaries that we'll need throughout our study. We'll discuss the nature of physical theory and the use of idealized models to represent physical systems. We'll introduce the systems of units used to describe physical quantities and discuss ways to describe the accuracy of a number. We'll look at examples of problems for which we can't (or don't want to) find a precise answer, but for which rough estimates can be useful and interesting. Finally, we'll study several aspects of vectors and vector algebra. We'll need vectors throughout our study of physics to help us describe and analyze physical quantities, such as velocity and force, that have direction as well as magnitude.

## 1.1 THE NATURE OF PHYSICS

Physics is an *experimental* science. Physicists observe the phenomena of nature and try to find patterns that relate these phenomena. These patterns are called physical theories or, when they are very well established and widely used, physical laws or principles.

### LEARNING OUTCOMES

*In this chapter, you'll learn...*

- 1.1 What a physical theory is.
- 1.2 The four steps you can use to solve any physics problem.
- 1.3 Three fundamental quantities of physics and the units physicists use to measure them.
- 1.4 How to work with units in your calculations.
- 1.5 How to keep track of significant figures in your calculations.
- 1.6 How to make rough, order-of-magnitude estimates.
- 1.7 The difference between scalars and vectors, and how to add and subtract vectors graphically.
- 1.8 What the components of a vector are and how to use them in calculations.
- 1.9 What unit vectors are and how to use them with components to describe vectors.
- 1.10 Two ways to multiply vectors: the scalar (dot) product and the vector (cross) product.

Figure 1.1 Two research laboratories.

(a) According to legend, Galileo investigated falling objects by dropping them from the Leaning Tower of Pisa, Italy, ...



... and he studied pendulum motion by observing the swinging chandelier in the adjacent cathedral.

(b) By doing experiments in apparent weightlessness on board the International Space Station, physicists have been able to make sensitive measurements that would be impossible in Earth's surface gravity.



**CAUTION** The meaning of “theory” A theory is *not* just a random thought or an unproven concept. Rather, a theory is an explanation of natural phenomena based on observation and accepted fundamental principles. An example is the well-established theory of biological evolution, which is the result of extensive research and observation by generations of biologists. |

To develop a physical theory, a physicist has to ask appropriate questions, design experiments to try to answer the questions, and draw appropriate conclusions from the results. **Figure 1.1** shows two important facilities used for physics experiments.

Legend has it that Galileo Galilei (1564–1642) dropped light and heavy objects from the top of the Leaning Tower of Pisa (Fig. 1.1a) to find out whether their rates of fall were different. From examining the results of his experiments (which were actually much more sophisticated than in the legend), he deduced the theory that the acceleration of a freely falling object is independent of its weight.

The development of physical theories such as Galileo’s often takes an indirect path, with blind alleys, wrong guesses, and the discarding of unsuccessful theories in favor of more promising ones. Physics is not simply a collection of facts and principles; it is also the *process* by which we arrive at general principles that describe how the physical universe behaves.

No theory is ever regarded as the ultimate truth. It’s always possible that new observations will require that a theory be revised or discarded. Note that we can disprove a theory by finding behavior that is inconsistent with it, but we can never prove that a theory is always correct.

Getting back to Galileo, suppose we drop a feather and a cannonball. They certainly do *not* fall at the same rate. This does not mean that Galileo was wrong; it means that his theory was incomplete. If we drop the feather and the cannonball *in a vacuum* to eliminate the effects of the air, then they do fall at the same rate. Galileo’s theory has a **range of validity**: It applies only to objects for which the force exerted by the air (due to air resistance and buoyancy) is much less than the weight. Objects like feathers or parachutes are clearly outside this range.

## 1.2 SOLVING PHYSICS PROBLEMS

At some point in their studies, almost all physics students find themselves thinking, “I understand the concepts, but I just can’t solve the problems.” But in physics, truly understanding a concept *means* being able to apply it to a variety of problems. Learning how to solve problems is absolutely essential; you don’t *know* physics unless you can *do* physics.

How do you learn to solve physics problems? In every chapter of this book you’ll find *Problem-Solving Strategies* that offer techniques for setting up and solving problems efficiently and accurately. Following each *Problem-Solving Strategy* are one or more worked *Examples* that show these techniques in action. (The *Problem-Solving Strategies* will also steer you away from some *incorrect* techniques that you may be tempted to use.) You’ll also find additional examples that aren’t associated with a particular *Problem-Solving Strategy*. In addition, at the end of each chapter you’ll find a *Bridging Problem* that uses more than one of the key ideas from the chapter. Study these strategies and problems carefully, and work through each example for yourself on a piece of paper.

Different techniques are useful for solving different kinds of physics problems, which is why this book offers dozens of *Problem-Solving Strategies*. No matter what kind of problem you’re dealing with, however, there are certain key steps that you’ll always follow. (These same steps are equally useful for problems in math, engineering, chemistry, and many other fields.) In this book we’ve organized these steps into four stages of solving a problem.

All of the *Problem-Solving Strategies* and *Examples* in this book will follow these four steps. (In some cases we’ll combine the first two or three steps.) We encourage you to follow these same steps when you solve problems yourself. You may find it useful to remember the acronym **I SEE**—short for *Identify, Set up, Execute, and Evaluate*.



## PROBLEM-SOLVING STRATEGY 1.1 Solving Physics Problems

### IDENTIFY *the relevant concepts:*

- Use the physical conditions stated in the problem to help you decide which physics concepts are relevant.
- Identify the **target variables** of the problem—that is, the quantities whose values you’re trying to find, such as the speed at which a projectile hits the ground, the intensity of a sound made by a siren, or the size of an image made by a lens.
- Identify the known quantities, as stated or implied in the problem. This step is essential whether the problem asks for an algebraic expression or a numerical answer.

### SET UP *the problem:*

- Given the concepts, known quantities, and target variables that you found in the IDENTIFY step, choose the equations that you’ll use to solve the problem and decide how you’ll use them. Study the worked examples in this book for tips on how to select the proper equations. If this seems challenging, don’t worry—you’ll get better with practice!
- Make sure that the variables you have identified correlate exactly with those in the equations.

- If appropriate, draw a sketch of the situation described in the problem. (Graph paper and a ruler will help you make clear, useful sketches.)

### EXECUTE *the solution:*

- Here’s where you’ll “do the math” with the equations that you selected in the SET UP step to solve for the target variables that you found in the IDENTIFY step. Study the worked examples to see what’s involved in this step.

### EVALUATE *your answer:*

- Check your answer from the SOLVE step to see if it’s reasonable. (If you’re calculating how high a thrown baseball goes, an answer of 1.0 mm is unreasonably small and an answer of 100 km is unreasonably large.) If your answer includes an algebraic expression, confirm that it correctly represents what would happen if the variables in it had very large or very small values.
- For future reference, make note of any answer that represents a quantity of particular significance. Ask yourself how you might answer a more general or more difficult version of the problem you have just solved.

## Idealized Models

In everyday conversation we use the word “model” to mean either a small-scale replica, such as a model railroad, or a person who displays articles of clothing (or the absence thereof). In physics a **model** is a simplified version of a physical system that would be too complicated to analyze in full detail.


For example, suppose we want to analyze the motion of a thrown baseball (**Fig. 1.2a**). How complicated is this problem? The ball is not a perfect sphere (it has raised seams), and it spins as it moves through the air. Air resistance and wind influence its motion, the ball’s weight varies a little as its altitude changes, and so on. If we try to include all these effects, the analysis gets hopelessly complicated. Instead, we invent a simplified version of the problem. We ignore the size, shape, and rotation of the ball by representing it as a point object, or **particle**. We ignore air resistance by making the ball move in a vacuum, and we make the weight constant. Now we have a problem that is simple enough to deal with (**Fig. 1.2b**). We’ll analyze this model in detail in Chapter 3.

We have to overlook quite a few minor effects to make an idealized model, but we must be careful not to neglect too much. If we ignore the effects of gravity completely, then our model predicts that when we throw the ball up, it will go in a straight line and disappear into space. A useful model simplifies a problem enough to make it manageable, yet keeps its essential features.

The validity of the predictions we make using a model is limited by the validity of the model. For example, Galileo’s prediction about falling objects (see Section 1.1) corresponds to an idealized model that does not include the effects of air resistance. This model works fairly well for a dropped cannonball, but not so well for a feather.

Idealized models play a crucial role throughout this book. Watch for them in discussions of physical theories and their applications to specific problems.

Figure 1.2 To simplify the analysis of (a) a baseball in flight, we use (b) an idealized model.

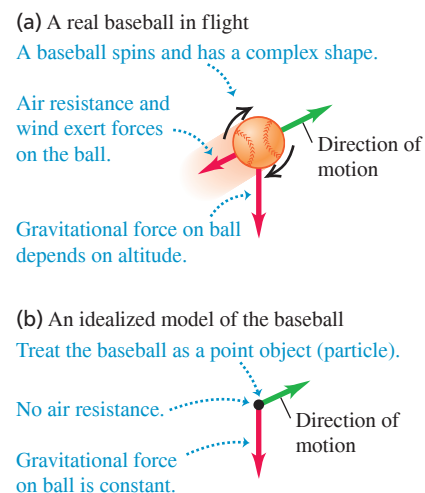

## 1.3 STANDARDS AND UNITS

As we learned in Section 1.1, physics is an experimental science. Experiments require measurements, and we generally use numbers to describe the results of measurements. Any number that is used to describe a physical phenomenon quantitatively is called

a **physical quantity**. For example, two physical quantities that describe you are your weight and your height. Some physical quantities are so fundamental that we can define them only by describing how to measure them. Such a definition is called an **operational definition**. Two examples are measuring a distance by using a ruler and measuring a time interval by using a stopwatch. In other cases we define a physical quantity by describing how to calculate it from other quantities that we *can* measure. Thus we might define the average speed of a moving object as the distance traveled (measured with a ruler) divided by the time of travel (measured with a stopwatch).


When we measure a quantity, we always compare it with some reference standard. When we say that a basketball hoop is 3.05 meters above the ground, we mean that this distance is 3.05 times as long as a meter stick, which we define to be 1 meter long. Such a standard defines a **unit** of the quantity. The meter is a unit of distance, and the second is a unit of time. When we use a number to describe a physical quantity, we must always specify the unit that we are using; to describe a distance as simply “3.05” wouldn’t mean anything.

To make accurate, reliable measurements, we need units of measurement that do not change and that can be duplicated by observers in various locations. The system of units used by scientists and engineers around the world is commonly called “the metric system,” but since 1960 it has been known officially as the **International System**, or **SI** (the abbreviation for its French name, *Système International*). Appendix A gives a list of all SI units as well as definitions of the most fundamental units. The United States and a few other countries use the British System of Units. Appendix C gives a list of British units as well as their definitions.


Figure 1.3 The measurements used to determine (a) the duration of a second and (b) the length of a meter. These measurements are useful for setting standards because they give the same results no matter where they are made.

(a) Measuring the second

Microwave radiation with a frequency of exactly 9,192,631,770 cycles per second ...

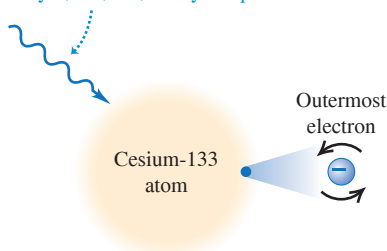


... causes the outermost electron of a cesium-133 atom to reverse its spin direction.



An atomic clock uses this phenomenon to tune microwaves to this exact frequency. It then counts 1 second for each 9,192,631,770 cycles.

(b) Measuring the meter

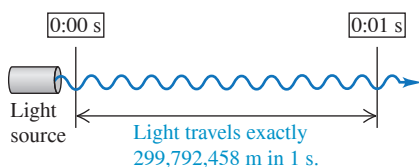

## Time

From 1889 until 1967, the unit of time was defined as a certain fraction of the mean solar day, the average time between successive arrivals of the sun at its highest point in the sky. The present standard, adopted in 1967, is much more precise. It is based on an atomic clock, which uses the energy difference between the two lowest energy states of the cesium atom ( $^{133}\text{Cs}$ ). When bombarded by microwaves of precisely the proper frequency, cesium atoms undergo a transition from one of these states to the other. One **second** (abbreviated s) is defined as the time required for 9,192,631,770 cycles of this microwave radiation (Fig. 1.3a).

## Length

In 1960 an atomic standard for the meter was also established, using the wavelength of the orange-red light emitted by excited atoms of krypton ( $^{86}\text{Kr}$ ). From this length standard, the speed of light in vacuum was measured to be 299,792,458 m/s. In November 1983, the length standard was changed again so that the speed of light in vacuum was *defined* to be precisely 299,792,458 m/s. Hence the new definition of the **meter** (abbreviated m) is the distance that light travels in vacuum in  $1/299,792,458$  second (Fig. 1.3b). This modern definition provides a much more precise standard of length than the one based on a wavelength of light.

## Mass

Until recently the unit of mass, the **kilogram** (abbreviated kg), was defined to be the mass of a metal cylinder kept at the International Bureau of Weights and Measures in France (Fig. 1.4). This was a very inconvenient standard to use. Since 2018 the value of the kilogram has been based on a fundamental constant of nature called *Planck’s constant* (symbol  $h$ ), whose defined value  $h = 6.62607015 \times 10^{-34} \text{ kg} \cdot \text{m}^2/\text{s}$  is related to those of the kilogram, meter, and second. Given the values of the meter and the second, the masses of objects can be experimentally determined in terms of  $h$ . (We’ll explain the meaning of  $h$  in Chapter 28.) The *gram* (which is not a fundamental unit) is 0.001 kilogram.

Other *derived units* can be formed from the fundamental units. For example, the units of speed are meters per second, or m/s; these are the units of length (m) divided by the units of time (s).

## Unit Prefixes

Once we have defined the fundamental units, it is easy to introduce larger and smaller units for the same physical quantities. In the metric system these other units are related to the fundamental units (or, in the case of mass, to the gram) by multiples of 10 or  $\frac{1}{10}$ . Thus one kilometer (1 km) is 1000 meters, and one centimeter (1 cm) is  $\frac{1}{100}$  meter. We usually express multiples of 10 or  $\frac{1}{10}$  in exponential notation:  $1000 = 10^3$ ,  $\frac{1}{1000} = 10^{-3}$ , and so on. With this notation,  $1 \text{ km} = 10^3 \text{ m}$  and  $1 \text{ cm} = 10^{-2} \text{ m}$ .

The names of the additional units are derived by adding a **prefix** to the name of the fundamental unit. For example, the prefix “kilo-,” abbreviated k, always means a unit larger by a factor of 1000; thus

$$1 \text{ kilometer} = 1 \text{ km} = 10^3 \text{ meters} = 10^3 \text{ m}$$

$$1 \text{ kilogram} = 1 \text{ kg} = 10^3 \text{ grams} = 10^3 \text{ g}$$

$$1 \text{ kilowatt} = 1 \text{ kW} = 10^3 \text{ watts} = 10^3 \text{ W}$$

A table in Appendix A lists the standard SI units, with their meanings and abbreviations.

**Table 1.1** gives some examples of the use of multiples of 10 and their prefixes with the units of length, mass, and time. **Figure 1.5** (next page) shows how these prefixes are used to describe both large and small distances.


Figure 1.4 Until 2018 a metal cylinder was used to define the value of the kilogram. (The one shown here, a copy of the one in France, was maintained by the U. S. National Institute of Standards and Technology.) Today the kilogram is defined in terms of one of the fundamental constants of nature.



**TABLE 1.1** Some Units of Length, Mass, and Time

Length	Mass	Time
1 nanometer = 1 nm = $10^{-9}$ m (a few times the size of the largest atom)	1 microgram = 1 $\mu\text{g}$ = $10^{-6}$ g = $10^{-9}$ kg (mass of a very small dust particle)	1 nanosecond = 1 ns = $10^{-9}$ s (time for light to travel 0.3 m)
1 micrometer = 1 $\mu\text{m}$ = $10^{-6}$ m (size of some bacteria and other cells)	1 milligram = 1 mg = $10^{-3}$ g = $10^{-6}$ kg (mass of a grain of salt)	1 microsecond = 1 $\mu\text{s}$ = $10^{-6}$ s (time for space station to move 8 mm)
1 millimeter = 1 mm = $10^{-3}$ m (diameter of the point of a ballpoint pen)	1 gram = 1 g = $10^{-3}$ kg (mass of a paper clip)	1 millisecond = 1 ms = $10^{-3}$ s (time for a plane flying at cruising speed to travel 25 cm)
1 centimeter = 1 cm = $10^{-2}$ m (diameter of your little finger)		
1 kilometer = 1 km = $10^3$ m (distance in a 10 minute walk)		

Figure 1.5 Some typical lengths in the universe.

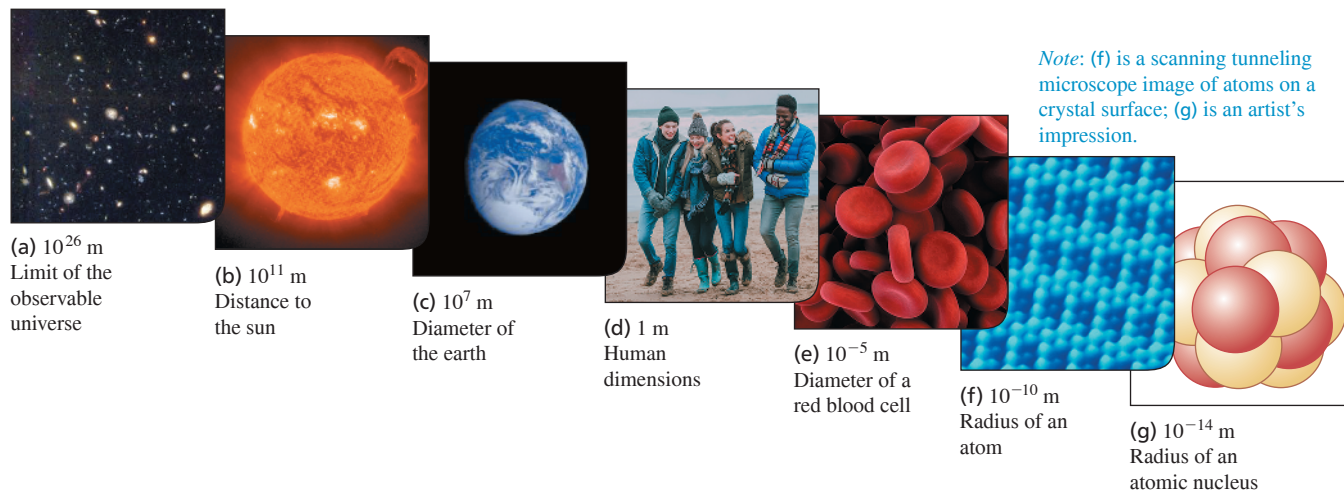

## 1.4 USING AND CONVERTING UNITS

We use equations to express relationships among physical quantities, represented by algebraic symbols. Each algebraic symbol always denotes both a number and a unit. For example,  $d$  might represent a distance of 10 m,  $t$  a time of 5 s, and  $v$  a speed of 2 m/s.

An equation must always be **dimensionally consistent**. You can't add apples and automobiles; two terms may be added or equated only if they have the same units. For example, if an object moving with constant speed  $v$  travels a distance  $d$  in a time  $t$ , these quantities are related by the equation

$$d = vt$$

If  $d$  is measured in meters, then the product  $vt$  must also be expressed in meters. Using the above numbers as an example, we may write

$$10 \text{ m} = \left(2 \frac{\text{m}}{\text{s}}\right)(5 \text{ s})$$

Because the unit s in the denominator of m/s cancels, the product has units of meters, as it must. In calculations, units are treated just like algebraic symbols with respect to multiplication and division.

**CAUTION** Always use units in calculations Make it a habit to *always* write numbers with the correct units and carry the units through the calculation as in the example above. This provides a very useful check. If at some stage in a calculation you find that an equation or an expression has inconsistent units, you know you have made an error. In this book we'll *always* carry units through all calculations, and we strongly urge you to follow this practice when you solve problems. ■

## PROBLEM-SOLVING STRATEGY 1.2 Unit Conversions

**IDENTIFY** *the relevant concepts:* In most cases, it's best to use the fundamental SI units (lengths in meters, masses in kilograms, and times in seconds) in every problem. If you need the answer to be in a different set of units (such as kilometers, grams, or hours), wait until the end of the problem to make the conversion.

**SET UP** *the problem* and **EXECUTE** *the solution:* Units are multiplied and divided just like ordinary algebraic symbols. This gives us an easy way to convert a quantity from one set of units to another: Express the same physical quantity in two different units and form an equality.

For example, when we say that  $1 \text{ min} = 60 \text{ s}$ , we don't mean that the number 1 is equal to the number 60; rather, we mean that 1 min represents the same physical time interval as 60 s. For this reason, the ratio  $(1 \text{ min})/(60 \text{ s})$  equals 1, as does its reciprocal,  $(60 \text{ s})/(1 \text{ min})$ . We may multiply a quantity by either of these factors

(which we call *unit multipliers*) without changing that quantity's physical meaning. For example, to find the number of seconds in 3 min, we write

$$3 \text{ min} = (3 \text{ min}) \left( \frac{60 \text{ s}}{1 \text{ min}} \right) = 180 \text{ s}$$

**EVALUATE** *your answer:* If you do your unit conversions correctly, unwanted units will cancel, as in the example above. If, instead, you had multiplied 3 min by  $(1 \text{ min})/(60 \text{ s})$ , your result would have been the nonsensical  $\frac{1}{20} \text{ min}^2/\text{s}$ . To be sure you convert units properly, include the units at *all* stages of the calculation.

Finally, check whether your answer is reasonable. For example, the result  $3 \text{ min} = 180 \text{ s}$  is reasonable because the second is a smaller unit than the minute, so there are more seconds than minutes in the same time interval.

### EXAMPLE 1.1 Converting speed units

The world land speed record of 1228.0 km/h was set on October 15, 1997, by Andy Green in the jet-engine car *Thrust SSC*. Express this speed in meters per second.

**IDENTIFY, SET UP, and EXECUTE** We need to convert the units of a speed from km/h to m/s. We must therefore use unit multipliers that relate (i) kilometers to meters and (ii) hours to seconds. We have  $1 \text{ km} = 1000 \text{ m}$ , and  $1 \text{ h} = 3600 \text{ s}$ . We set up the conversion as follows, which ensures that all the desired cancellations by division take place:

$$\begin{aligned} 1228.0 \text{ km/h} &= \left( 1228.0 \frac{\text{km}}{\text{h}} \right) \left( \frac{1000 \text{ m}}{1 \text{ km}} \right) \left( \frac{1 \text{ h}}{3600 \text{ s}} \right) \\ &= 341.1 \text{ m/s} \end{aligned}$$

**EVALUATE** This example shows a useful rule: A speed expressed in m/s is the value expressed in km/h divided by 3.6 (hence, between one third and one quarter of the value in km/h). A speed expressed in km/h is the value expressed in m/s times 3.6. For example  $20 \text{ m/s} = 72 \text{ km/h}$  and  $90 \text{ km/h} = 25 \text{ m/s}$ .

**KEYCONCEPT** To convert units, multiply by an appropriate unit multiplier.

### EXAMPLE 1.2 Converting volume units

One of the world's largest cut diamonds is the First Star of Africa (mounted in the British Royal Sceptre and kept in the Tower of London). Its volume is 30.2 cubic centimeters. What is its volume in cubic millimeters? In cubic meters?

**IDENTIFY, SET UP, and EXECUTE** Here we are to convert the units of a volume from cubic centimeters ( $\text{cm}^3$ ) to both cubic millimeters ( $\text{mm}^3$ ) and cubic meters ( $\text{m}^3$ ). Since  $1 \text{ cm} = 10 \text{ mm}$  we have

$$\begin{aligned} 30.2 \text{ cm}^3 &= (30.2 \text{ cm}^3) \left( \frac{10 \text{ mm}}{1 \text{ cm}} \right)^3 \\ &= (30.2)(10)^3 \frac{\text{cm}^3 \text{ mm}^3}{\text{cm}^3} = 30,200 \text{ mm}^3 \end{aligned}$$

Since  $1 \text{ m} = 100 \text{ cm}$ , we also have

$$\begin{aligned} 30.2 \text{ cm}^3 &= (30.2 \text{ cm}^3) \left( \frac{1 \text{ m}}{100 \text{ cm}} \right)^3 \\ &= (30.2) \left( \frac{1}{100} \right)^3 \frac{\text{cm}^3 \text{ m}^3}{\text{cm}^3} = 30.2 \times 10^{-6} \text{ m}^3 \\ &= 3.02 \times 10^{-5} \text{ m}^3 \end{aligned}$$

**EVALUATE** Following the pattern of these conversions, can you show that  $1 \text{ km}^3 = 10^9 \text{ m}^3$  and that  $1 \mu\text{m}^3 = 10^{-18} \text{ m}^3$ ?

**KEYCONCEPT** If the units of a quantity are a product of simpler units, such as  $\text{m}^3 = \text{m} \times \text{m} \times \text{m}$ , use a product of unit multipliers to convert these units.

Figure 1.6 This spectacular mishap was the result of a very small percent error—traveling a few meters too far at the end of a journey of hundreds of thousands of meters.



TABLE 1.2 Using Significant Figures

**Multiplication or division:**

Result can have no more significant figures than the factor with the fewest significant figures:

$$\frac{0.745 \times 2.2}{3.885} = 0.42$$


$$1.32578 \times 10^7 \times 4.11 \times 10^{-3} = 5.45 \times 10^4$$

**Addition or subtraction:**

Number of significant figures is determined by the term with the largest uncertainty (i.e., fewest digits to the right of the decimal point):

$$27.153 + 138.2 - 11.74 = 153.6$$

Figure 1.7 Determining the value of  $\pi$  from the circumference and diameter of a circle.

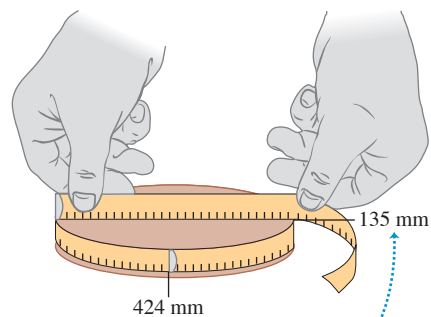

The measured values have only three significant figures, so their calculated ratio ( $\pi$ ) also has only three significant figures.

## 1.5 UNCERTAINTY AND SIGNIFICANT FIGURES

Measurements always have uncertainties. If you measure the thickness of the cover of a hardbound version of this book using an ordinary ruler, your measurement is reliable to only the nearest millimeter, and your result will be 3 mm. It would be *wrong* to state this result as 3.00 mm; given the limitations of the measuring device, you can't tell whether the actual thickness is 3.00 mm, 2.85 mm, or 3.11 mm. But if you use a micrometer caliper, a device that measures distances reliably to the nearest 0.01 mm, the result will be 2.91 mm. The distinction between the measurements with a ruler and with a caliper is in their **uncertainty**; the measurement with a caliper has a smaller uncertainty. The uncertainty is also called the **error** because it indicates the maximum difference there is likely to be between the measured value and the true value. The uncertainty or error of a measured value depends on the measurement technique used.

We often indicate the **accuracy** of a measured value—that is, how close it is likely to be to the true value—by writing the number, the symbol  $\pm$ , and a second number indicating the uncertainty of the measurement. If the diameter of a steel rod is given as  $56.47 \pm 0.02$  mm, this means that the true value is likely to be within the range from 56.45 mm to 56.49 mm. In a commonly used shorthand notation, the number 1.6454(21) means  $1.6454 \pm 0.0021$ . The numbers in parentheses show the uncertainty in the final digits of the main number.

We can also express accuracy in terms of the maximum likely **fractional error** or **percent error** (also called *fractional uncertainty* and *percent uncertainty*). A resistor labeled “47 ohms  $\pm 10\%$ ” probably has a true resistance that differs from 47 ohms by no more than 10% of 47 ohms—that is, by about 5 ohms. The resistance is probably between 42 and 52 ohms. For the diameter of the steel rod given above, the fractional error is  $(0.02 \text{ mm})/(56.47 \text{ mm})$ , or about 0.0004; the percent error is  $(0.0004)(100\%)$ , or about 0.04%. Even small percent errors can be very significant (Fig. 1.6).

In many cases the uncertainty of a number is not stated explicitly. Instead, the uncertainty is indicated by the number of meaningful digits, or **significant figures**, in the measured value. We gave the thickness of the cover of the book as 2.91 mm, which has three significant figures. By this we mean that the first two digits are known to be correct, while the third digit is uncertain. The last digit is in the hundredths place, so the uncertainty is about 0.01 mm. Two values with the *same* number of significant figures may have *different* uncertainties; a distance given as 137 km also has three significant figures, but the uncertainty is about 1 km. A distance given as 0.25 km has two significant figures (the zero to the left of the decimal point doesn't count); if given as 0.250 km, it has three significant figures.

When you use numbers that have uncertainties to compute other numbers, the computed numbers are also uncertain. When numbers are multiplied or divided, the result can have no more significant figures than the factor with the fewest significant figures has. For example,  $3.1416 \times 2.34 \times 0.58 = 4.3$ . When we add and subtract numbers, it's the location of the decimal point that matters, not the number of significant figures. For example,  $123.62 + 8.9 = 132.5$ . Although 123.62 has an uncertainty of about 0.01, 8.9 has an uncertainty of about 0.1. So their sum has an uncertainty of about 0.1 and should be written as 132.5, not 132.52. Table 1.2 summarizes these rules for significant figures.

To apply these ideas, suppose you want to verify the value of  $\pi$ , the ratio of the circumference of a circle to its diameter. The true value of this ratio to ten digits is 3.141592654. To test this, you draw a large circle and measure its circumference and diameter to the nearest millimeter, obtaining the values 424 mm and 135 mm (Fig. 1.7). You enter these into your calculator and obtain the quotient  $(424 \text{ mm})/(135 \text{ mm}) = 3.140740741$ . This may seem to disagree with the true value of  $\pi$ , but keep in mind that each of your measurements has three significant figures, so your measured value of  $\pi$  can have only three significant figures. It should be stated simply as 3.14. Within the limit of three significant figures, your value does agree with the true value.

In the examples and problems in this book we usually give numerical values with three significant figures, so your answers should usually have no more than three significant figures. (Many numbers in the real world have even less accuracy. The speedometer in a car, for example, usually gives only two significant figures.) Even if you do the arithmetic with a

calculator that displays ten digits, a ten-digit answer would misrepresent the accuracy of the results. Always round your final answer to keep only the correct number of significant figures or, in doubtful cases, one more at most. In Example 1.1 it would have been wrong to state the answer as 341.01861 m/s. Note that when you reduce such an answer to the appropriate number of significant figures, you must *round*, not *truncate*. Your calculator will tell you that the ratio of 525 m to 311 m is 1.688102894; to three significant figures, this is 1.69, not 1.68.

Here's a special note about calculations that involve multiple steps: As you work, it's helpful to keep extra significant figures in your calculations. Once you have your final answer, round it to the correct number of significant figures. This will give you the most accurate results.

When we work with very large or very small numbers, we can show significant figures much more easily by using **scientific notation**, sometimes called **powers-of-10 notation**. The distance from the earth to the moon is about 384,000,000 m, but writing the number in this form doesn't indicate the number of significant figures. Instead, we move the decimal point eight places to the left (corresponding to dividing by  $10^8$ ) and multiply by  $10^8$ ; that is,

$$384,000,000 \text{ m} = 3.84 \times 10^8 \text{ m}$$

In this form, it is clear that we have three significant figures. The number  $4.00 \times 10^{-7}$  also has three significant figures, even though two of them are zeros. Note that in scientific notation the usual practice is to express the quantity as a number between 1 and 10 multiplied by the appropriate power of 10.

When an integer or a fraction occurs in an algebraic equation, we treat that number as having no uncertainty at all. For example, in the equation  $v_x^2 = v_{0x}^2 + 2a_x(x - x_0)$ , which is Eq. (2.13) in Chapter 2, the coefficient 2 is *exactly* 2. We can consider this coefficient as having an infinite number of significant figures (2.000000 . . .). The same is true of the exponent 2 in  $v_x^2$  and  $v_{0x}^2$ .

Finally, let's note that **precision** is not the same as *accuracy*. A cheap digital watch that gives the time as 10:35:17 a.m. is very *precise* (the time is given to the second), but if the watch runs several minutes slow, then this value isn't very *accurate*. On the other hand, a grandfather clock might be very accurate (that is, display the correct time), but if the clock has no second hand, it isn't very precise. A high-quality measurement is both precise *and* accurate.

### EXAMPLE 1.3 Significant figures in multiplication

The rest energy  $E$  of an object with rest mass  $m$  is given by Albert Einstein's famous equation  $E = mc^2$ , where  $c$  is the speed of light in vacuum. Find  $E$  for an electron for which (to three significant figures)  $m = 9.11 \times 10^{-31}$  kg. The SI unit for  $E$  is the joule (J);  $1 \text{ J} = 1 \text{ kg} \cdot \text{m}^2/\text{s}^2$ .

**IDENTIFY and SET UP** Our target variable is the energy  $E$ . We are given the value of the mass  $m$ ; from Section 1.3 (or Appendix G) the speed of light is  $c = 2.99792458 \times 10^8$  m/s.

**EXECUTE** Substituting the values of  $m$  and  $c$  into Einstein's equation, we find

$$\begin{aligned} E &= (9.11 \times 10^{-31} \text{ kg})(2.99792458 \times 10^8 \text{ m/s})^2 \\ &= (9.11)(2.99792458)^2(10^{-31})(10^8)^2 \text{ kg} \cdot \text{m}^2/\text{s}^2 \\ &= (81.87659678)(10^{[-31+(2 \times 8)]}) \text{ kg} \cdot \text{m}^2/\text{s}^2 \\ &= 8.187659678 \times 10^{-14} \text{ kg} \cdot \text{m}^2/\text{s}^2 \end{aligned}$$

Since the value of  $m$  was given to only three significant figures, we must round this to

$$E = 8.19 \times 10^{-14} \text{ kg} \cdot \text{m}^2/\text{s}^2 = 8.19 \times 10^{-14} \text{ J}$$

**EVALUATE** While the rest energy contained in an electron may seem ridiculously small, on the atomic scale it is tremendous. Compare our answer to  $10^{-19}$  J, the energy gained or lost by a single atom during a typical chemical reaction. The rest energy of an electron is about 1,000,000 times larger! (We'll discuss the significance of rest energy in Chapter 37.)

**KEYCONCEPT** When you are multiplying (or dividing) quantities, the result can have no more significant figures than the quantity with the fewest significant figures.

**TEST YOUR UNDERSTANDING OF SECTION 1.5** The density of a material is equal to its mass divided by its volume. What is the density (in  $\text{kg}/\text{m}^3$ ) of a rock of mass 1.80 kg and volume  $6.0 \times 10^{-4} \text{ m}^3$ ? (i)  $3 \times 10^3 \text{ kg}/\text{m}^3$ ; (ii)  $3.0 \times 10^3 \text{ kg}/\text{m}^3$ ; (iii)  $3.00 \times 10^3 \text{ kg}/\text{m}^3$ ; (iv)  $3.000 \times 10^3 \text{ kg}/\text{m}^3$ ; (v) any of these—all of these answers are mathematically equivalent.

### ANSWER

number with the fewest significant figures controls the number of significant figures in the result. (ii) Density =  $(1.80 \text{ kg}) / (6.0 \times 10^{-4} \text{ m}^3) = 3.0 \times 10^3 \text{ kg}/\text{m}^3$ . When we multiply or divide, the

## 1.6 ESTIMATES AND ORDERS OF MAGNITUDE

We have stressed the importance of knowing the accuracy of numbers that represent physical quantities. But even a very crude estimate of a quantity often gives us useful information. Sometimes we know how to calculate a certain quantity, but we have to guess at the data we need for the calculation. Or the calculation might be too complicated to carry out exactly, so we make rough approximations. In either case our result is also a guess, but such a guess can be useful even if it is uncertain by a factor of two, ten, or more. Such calculations are called **order-of-magnitude estimates**. The great Italian-American nuclear physicist Enrico Fermi (1901–1954) called them “back-of-the-envelope calculations.”

Exercises 1.15 through 1.20 at the end of this chapter are of the estimating, or order-of-magnitude, variety. Most require guesswork for the needed input data. Don't try to look up a lot of data; make the best guesses you can. Even when they are off by a factor of ten, the results can be useful and interesting.

### EXAMPLE 1.4 An order-of-magnitude estimate

You are writing an adventure novel in which the hero escapes with a billion dollars' worth of gold in his suitcase. Could anyone carry that much gold? Would it fit in a suitcase?

**IDENTIFY, SET UP, and EXECUTE** Gold sells for about \$40 a gram (the price per gram has varied between \$34 and \$45 over the past five years or so), or about \$1000 for 25 grams, that is about \$1 million for 25 kilograms. A billion ( $1 \times 10^9$ ) dollars' worth of gold has a mass  $10^3$  times greater, about 25,000 kilograms or 25 tonnes! No human could lift it, let alone carry it. (25 tonnes is about the same as the mass of five asian elephants or two double-decker buses.)

What would the density of gold need to be in order for this amount to fit in a suitcase? The same amount of water would have the volume of  $25 \text{ m}^3$  or 25,000 liters (the density of water is  $1 \text{ g/cm}^3 = 1000 \text{ kg/m}^3$  and  $1 \text{ liter} = 1 \text{ L} = 10^{-3} \text{ m}^3$ ). This is more than 100 times the capacity of even the largest suitcase (120 to 160 L). Therefore, for 25,000 kilograms of gold to fit in a suitcase, gold would need to be at least 100 times denser than

water. In other words, a cube of gold of side 10 cm would have a mass larger than 100 kg, which is certainly not the case. Gold is much denser than water, but not that dense. (The density of gold is actually  $19.3 \text{ g/cm}^3$ , which is roughly 20 times that of water; the densest naturally occurring element on earth is osmium which has the density of  $22.6 \text{ g/cm}^3$ .)

**EVALUATE** Clearly your novel needs rewriting. Maybe your hero could be satisfied with 1 million dollars' worth of gold? We have seen that the mass of gold in this case is about 25 kilograms, an amount which your hero should be able to carry and which would easily fit in a briefcase. If you want a more spectacular amount, try the calculation again with a suitcase full of five-carat (1-gram) diamonds, each worth \$500,000. Would this work?

**KEYCONCEPT** To decide whether the numerical value of a quantity is reasonable, assess the quantity in terms of other quantities that you can estimate, even if only roughly.

**TEST YOUR UNDERSTANDING OF SECTION 1.6** Can you estimate the total number of teeth in the mouths of all the students on your campus? (*Hint:* How many teeth are in your mouth? Count them!)

**ANSWER**

The answer depends on how many students are enrolled at your campus. |

### APPLICATION Scalar Temperature, Vector Wind

The comfort level on a wintry day depends on the temperature, a scalar quantity that can be positive or negative (say,  $+5^\circ\text{C}$  or  $-20^\circ\text{C}$ ) but has no direction. It also depends on the wind velocity, a vector quantity with both magnitude and direction (for example, 15 km/h from the west).



## 1.7 VECTORS AND VECTOR ADDITION

Some physical quantities, such as time, temperature, mass, and density, can be described completely by a single number with a unit. But many other important quantities in physics have a *direction* associated with them and cannot be described by a single number. A simple example is the motion of an airplane: We must say not only how fast the plane is moving but also in what direction. The speed of the airplane combined with its direction of motion constitute a quantity called *velocity*. Another example is *force*, which in physics means a push or pull exerted on an object. Giving a complete description of a force means describing both how hard the force pushes or pulls on the object and the direction of the push or pull.

When a physical quantity is described by a single number, we call it a **scalar quantity**. In contrast, a **vector quantity** has both a **magnitude** (the “how much” or “how big” part) and a direction in space. Calculations that combine scalar quantities use the operations of ordinary arithmetic. For example,  $6 \text{ kg} + 3 \text{ kg} = 9 \text{ kg}$ , or  $4 \times 2 \text{ s} = 8 \text{ s}$ . However, combining vectors requires a different set of operations.

To understand more about vectors and how they combine, we start with the simplest vector quantity, **displacement**. Displacement is a change in the position of an object.



Displacement is a vector quantity because we must state not only how far the object moves but also in what direction. Walking 3 km north from your front door doesn't get you to the same place as walking 3 km southeast; these two displacements have the same magnitude but different directions.

We usually represent a vector quantity such as displacement by a single letter, such as  $\vec{A}$  in Fig. 1.8a. In this book we always print vector symbols in **boldface italic type with an arrow above them**. We do this to remind you that vector quantities have different properties from scalar quantities; the arrow is a reminder that vectors have direction. When you handwrite a symbol for a vector, *always* write it with an arrow on top. If you don't distinguish between scalar and vector quantities in your notation, you probably won't make the distinction in your thinking either, and confusion will result.

We always *draw* a vector as a line with an arrowhead at its tip. The length of the line shows the vector's magnitude, and the direction of the arrowhead shows the vector's direction. Displacement is always a straight-line segment directed from the starting point to the ending point, even though the object's actual path may be curved (Fig. 1.8b). Note that displacement is not related directly to the total *distance* traveled. If the object were to continue past  $P_2$  and then return to  $P_1$ , the displacement for the entire trip would be *zero* (Fig. 1.8c).

If two vectors have the same direction, they are **parallel**. If they have the same magnitude *and* the same direction, they are **equal**, no matter where they are located in space. The vector  $\vec{A}'$  from point  $P_3$  to point  $P_4$  in Fig. 1.9 has the same length and direction as the vector  $\vec{A}$  from  $P_1$  to  $P_2$ . These two displacements are equal, even though they start at different points. We write this as  $\vec{A}' = \vec{A}$  in Fig. 1.9; the boldface equals sign emphasizes that equality of two vector quantities is not the same relationship as equality of two scalar quantities. Two vector quantities are equal only when they have the same magnitude *and* the same direction.

Vector  $\vec{B}$  in Fig. 1.9, however, is not equal to  $\vec{A}$  because its direction is *opposite* that of  $\vec{A}$ . We define the **negative of a vector** as a vector having the same magnitude as the original vector but the *opposite* direction. The negative of vector quantity  $\vec{A}$  is denoted as  $-\vec{A}$ , and we use a boldface minus sign to emphasize the vector nature of the quantities. If  $\vec{A}$  is 87 m south, then  $-\vec{A}$  is 87 m north. Thus we can write the relationship between  $\vec{A}$  and  $\vec{B}$  in Fig. 1.9 as  $\vec{A} = -\vec{B}$  or  $\vec{B} = -\vec{A}$ . When two vectors  $\vec{A}$  and  $\vec{B}$  have opposite directions, whether their magnitudes are the same or not, we say that they are **antiparallel**.

We usually represent the *magnitude* of a vector quantity by the same letter used for the vector, but in *lightface italic type with no arrow on top*. For example, if displacement vector  $\vec{A}$  is 87 m south, then  $A = 87$  m. An alternative notation is the vector symbol with vertical bars on both sides:

$$(\text{Magnitude of } \vec{A}) = A = |\vec{A}| \quad (1.1)$$

The magnitude of a vector quantity is a scalar quantity (a number) and is *always positive*. Note that a vector can never be equal to a scalar because they are different kinds of quantities. The expression " $\vec{A} = 6$  m" is just as wrong as "2 oranges = 3 apples"!

When we draw diagrams with vectors, it's best to use a scale similar to those used for maps. For example, a displacement of 5 km might be represented in a diagram by a vector 1 cm long, and a displacement of 10 km by a vector 2 cm long.

## Vector Addition and Subtraction


Suppose a particle undergoes a displacement  $\vec{A}$  followed by a second displacement  $\vec{B}$ . The final result is the same as if the particle had started at the same initial point and undergone a single displacement  $\vec{C}$  (Fig. 1.10a, next page). We call displacement  $\vec{C}$  the **vector sum**, or **resultant**, of displacements  $\vec{A}$  and  $\vec{B}$ . We express this relationship symbolically as

$$\vec{C} = \vec{A} + \vec{B} \quad (1.2)$$


The boldface plus sign emphasizes that adding two vector quantities requires a geometrical process and is not the same operation as adding two scalar quantities such as  $2 + 3 = 5$ . In vector addition we usually place the *tail* of the *second* vector at the *head*, or tip, of the *first* vector (Fig. 1.10a).

Figure 1.8 Displacement as a vector quantity.

(a) We represent a displacement by an arrow that points in the direction of displacement.

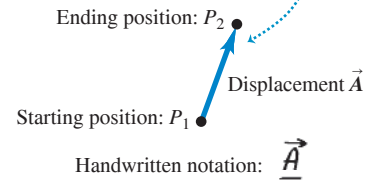

(b) A displacement is always a straight arrow directed from the starting position to the ending position. It does not depend on the path taken, even if the path is curved.



(c) Total displacement for a round trip is 0, regardless of the path taken or distance traveled.




Figure 1.9 The meaning of vectors that have the same magnitude and the same or opposite direction.


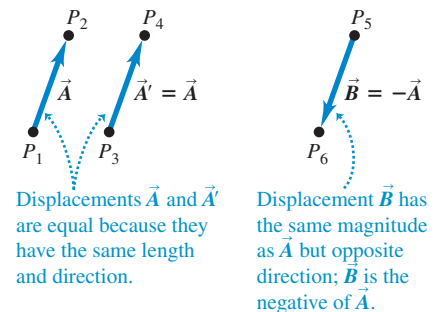



Figure 1.10 Three ways to add two vectors.

(a) We can add two vectors by placing them head to tail.

The vector sum  $\vec{C}$  extends from the tail of vector  $\vec{A}$  ... to the head of vector  $\vec{B}$ .



(b) Adding them in reverse order gives the same result:  $\vec{A} + \vec{B} = \vec{B} + \vec{A}$ . The order doesn't matter in vector addition.




(c) We can also add two vectors by placing them tail to tail and constructing a parallelogram.




Figure 1.11 Adding vectors that are (a) parallel and (b) antiparallel.

(a) Only when vectors  $\vec{A}$  and  $\vec{B}$  are parallel does the magnitude of their vector sum  $\vec{C}$  equal the sum of their magnitudes:  $C = A + B$ .



(b) When  $\vec{A}$  and  $\vec{B}$  are antiparallel, the magnitude of their vector sum  $\vec{C}$  equals the difference of their magnitudes:  $C = |A - B|$ .



If we make the displacements  $\vec{A}$  and  $\vec{B}$  in reverse order, with  $\vec{B}$  first and  $\vec{A}$  second, the result is the same (Fig. 1.10b). Thus

$$\vec{C} = \vec{B} + \vec{A} \quad \text{and} \quad \vec{A} + \vec{B} = \vec{B} + \vec{A} \quad (1.3)$$

This shows that the order of terms in a vector sum doesn't matter. In other words, vector addition obeys the *commutative* law.

Figure 1.10c shows another way to represent the vector sum: If we draw vectors  $\vec{A}$  and  $\vec{B}$  with their tails at the same point, vector  $\vec{C}$  is the diagonal of a parallelogram constructed with  $\vec{A}$  and  $\vec{B}$  as two adjacent sides.

**CAUTION** **Magnitudes in vector addition** It's a common error to conclude that if  $\vec{C} = \vec{A} + \vec{B}$ , then magnitude  $C$  equals magnitude  $A$  plus magnitude  $B$ . In general, this conclusion is *wrong*; for the vectors shown in Fig. 1.10,  $C < A + B$ . The magnitude of  $\vec{A} + \vec{B}$  depends on the magnitudes of  $\vec{A}$  and  $\vec{B}$  and on the angle between  $\vec{A}$  and  $\vec{B}$ . Only in the special case in which  $\vec{A}$  and  $\vec{B}$  are *parallel* is the magnitude of  $\vec{C} = \vec{A} + \vec{B}$  equal to the sum of the magnitudes of  $\vec{A}$  and  $\vec{B}$  (Fig. 1.11a). When the vectors are *antiparallel* (Fig. 1.11b), the magnitude of  $\vec{C}$  equals the *difference* of the magnitudes of  $\vec{A}$  and  $\vec{B}$ . Be careful to distinguish between scalar and vector quantities, and you'll avoid making errors about the magnitude of a vector sum. ■

Figure 1.12a shows *three* vectors  $\vec{A}$ ,  $\vec{B}$ , and  $\vec{C}$ . To find the vector sum of all three, in Fig. 1.12b we first add  $\vec{A}$  and  $\vec{B}$  to give a vector sum  $\vec{D}$ ; we then add vectors  $\vec{C}$  and  $\vec{D}$  by the same process to obtain the vector sum  $\vec{R}$ :

$$\vec{R} = (\vec{A} + \vec{B}) + \vec{C} = \vec{D} + \vec{C}$$

Alternatively, we can first add  $\vec{B}$  and  $\vec{C}$  to obtain vector  $\vec{E}$  (Fig. 1.12c), and then add  $\vec{A}$  and  $\vec{E}$  to obtain  $\vec{R}$ :

$$\vec{R} = \vec{A} + (\vec{B} + \vec{C}) = \vec{A} + \vec{E}$$

We don't even need to draw vectors  $\vec{D}$  and  $\vec{E}$ ; all we need to do is draw  $\vec{A}$ ,  $\vec{B}$ , and  $\vec{C}$  in succession, with the tail of each at the head of the one preceding it. The sum vector  $\vec{R}$  extends from the tail of the first vector to the head of the last vector (Fig. 1.12d). The order makes no difference; Fig. 1.12e shows a different order, and you should try others. Vector addition obeys the *associative* law.


We can *subtract* vectors as well as add them. To see how, recall that vector  $-\vec{A}$  has the same magnitude as  $\vec{A}$  but the opposite direction. We define the difference  $\vec{A} - \vec{B}$  of two vectors  $\vec{A}$  and  $\vec{B}$  to be the vector sum of  $\vec{A}$  and  $-\vec{B}$ :

$$\vec{A} - \vec{B} = \vec{A} + (-\vec{B}) \quad (1.4)$$


Figure 1.13 shows an example of vector subtraction.

Figure 1.12 Several constructions for finding the vector sum  $\vec{A} + \vec{B} + \vec{C}$ .


(a) To find the sum of these three vectors ...




(b) ... add  $\vec{A}$  and  $\vec{B}$  to get  $\vec{D}$  and then add  $\vec{C}$  to  $\vec{D}$  to get the final sum (resultant)  $\vec{R}$  ...



(c) ... or add  $\vec{B}$  and  $\vec{C}$  to get  $\vec{E}$  and then add  $\vec{E}$  to  $\vec{A}$  to get  $\vec{R}$  ...



(d) ... or add  $\vec{A}$ ,  $\vec{B}$ , and  $\vec{C}$  to get  $\vec{R}$  directly ...



(e) ... or add  $\vec{A}$ ,  $\vec{B}$ , and  $\vec{C}$  in any other order and still get  $\vec{R}$ .





Figure 1.13 To construct the vector difference  $\vec{A} - \vec{B}$ , you can either place the tail of  $-\vec{B}$  at the head of  $\vec{A}$  or place the two vectors  $\vec{A}$  and  $\vec{B}$  head to head.

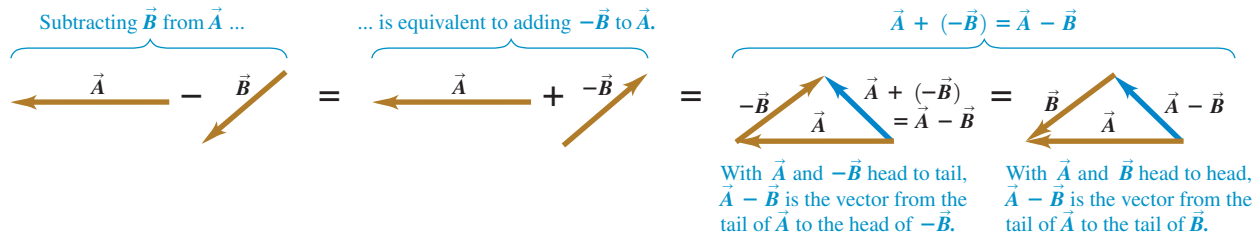


A vector quantity such as a displacement can be multiplied by a scalar quantity (an ordinary number). The displacement  $2\vec{A}$  is a displacement (vector quantity) in the same direction as vector  $\vec{A}$  but twice as long; this is the same as adding  $\vec{A}$  to itself (Fig. 1.14a). In general, when we multiply a vector  $\vec{A}$  by a scalar  $c$ , the result  $c\vec{A}$  has magnitude  $|c|A$  (the absolute value of  $c$  multiplied by the magnitude of vector  $\vec{A}$ ). If  $c$  is positive,  $c\vec{A}$  is in the same direction as  $\vec{A}$ ; if  $c$  is negative,  $c\vec{A}$  is in the direction opposite to  $\vec{A}$ . Thus  $3\vec{A}$  is parallel to  $\vec{A}$ , while  $-3\vec{A}$  is antiparallel to  $\vec{A}$  (Fig. 1.14b).

A scalar used to multiply a vector can also be a physical quantity. For example, you may be familiar with the relationship  $\vec{F} = m\vec{a}$ ; the net force  $\vec{F}$  (a vector quantity) that acts on an object is equal to the product of the object's mass  $m$  (a scalar quantity) and its acceleration  $\vec{a}$  (a vector quantity). The direction of  $\vec{F}$  is the same as that of  $\vec{a}$  because  $m$  is positive, and the magnitude of  $\vec{F}$  is equal to the mass  $m$  multiplied by the magnitude of  $\vec{a}$ . The unit of force is the unit of mass multiplied by the unit of acceleration.

Figure 1.14 Multiplying a vector by a scalar.

(a) Multiplying a vector by a positive scalar changes the magnitude (length) of the vector but not its direction.



(b) Multiplying a vector by a negative scalar changes its magnitude and reverses its direction.



### EXAMPLE 1.5 Adding two vectors at right angles

A cross-country skier skis 1.00 km north and then 2.00 km east on a horizontal snowfield. How far and in what direction is she from the starting point?

**IDENTIFY and SET UP** The problem involves combining two displacements at right angles to each other. This vector addition amounts to solving a right triangle, so we can use the Pythagorean theorem and trigonometry. The target variables are the skier's straight-line distance and direction from her starting point. Figure 1.15 is a scale diagram of the two displacements and the resultant net displacement. We denote the direction from the starting point by the angle  $\phi$  (the Greek letter phi). The displacement appears to be a bit more than 2 km. Measuring the angle with a protractor indicates that  $\phi$  is about  $63^\circ$ .

**EXECUTE** The distance from the starting point to the ending point is equal to the length of the hypotenuse:

$$\sqrt{(1.00 \text{ km})^2 + (2.00 \text{ km})^2} = 2.24 \text{ km}$$


A little trigonometry (from Appendix D) allows us to find angle  $\phi$ :

$$\tan \phi = \frac{\text{Opposite side}}{\text{Adjacent side}} = \frac{2.00 \text{ km}}{1.00 \text{ km}} = 2.00$$

$$\phi = \arctan 2.00 = 63.4^\circ$$

We can describe the direction as  $63.4^\circ$  east of north or  $90^\circ - 63.4^\circ = 26.6^\circ$  north of east.

Figure 1.15 The vector diagram, drawn to scale, for a ski trip.

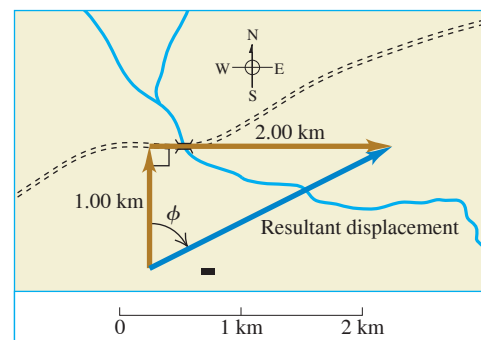

**EVALUATE** Our answers (2.24 km and  $\phi = 63.4^\circ$ ) are close to our predictions. In Section 1.8 we'll learn how to easily add two vectors *not* at right angles to each other.

**KEYCONCEPT** In every problem involving vector addition, draw the two vectors being added as well as the vector sum. The head-to-tail arrangement shown in Figs. 1.10a and 1.10b is easiest. This will help you to visualize the vectors and understand the direction of the vector sum. Drawing the vectors is equally important for problems involving vector subtraction (see Fig. 1.13).

**TEST YOUR UNDERSTANDING OF SECTION 1.7** Two displacement vectors,  $\vec{S}$  and  $\vec{T}$ , have magnitudes  $S = 3$  m and  $T = 4$  m. Which of the following could be the magnitude of the difference vector  $\vec{S} - \vec{T}$ ? (There may be more than one correct answer.) (i) 9 m; (ii) 7 m; (iii) 5 m; (iv) 1 m; (v) 0 m; (vi)  $-1$  m.

**ANSWER** (i), (ii), (iii), (iv), (v) Vector  $\vec{T}$  has the same magnitude as vector  $\vec{S}$ , so  $\vec{S} - \vec{T}$  is the sum of one vector of magnitude 3 m and one of magnitude 4 m. This sum has magnitude 7 m if  $\vec{S}$  and  $\vec{T}$  are parallel and magnitude 1 m if  $\vec{S}$  and  $\vec{T}$  are antiparallel. The magnitude of  $\vec{S} - \vec{T}$  is 5 m if  $\vec{S}$  and  $\vec{T}$  are perpendicular, when vectors  $\vec{S}$ ,  $\vec{T}$ , and  $\vec{S} - \vec{T}$  form a 3-4-5 right triangle. Answer (i) is impossible because the magnitude of the sum of two vectors cannot be greater than the sum of the magnitudes; answer (v) is impossible because the sum of two vectors can be zero only if the two vectors are antiparallel and have the same magnitude; and answer (vi) is impossible because the magnitude of a vector cannot be negative.


### 1.8 COMPONENTS OF VECTORS

In Section 1.7 we added vectors by using a scale diagram and properties of right triangles. But calculations with right triangles work only when the two vectors are perpendicular. So we need a simple but general method for adding vectors. This is called the method of *components*.

To define what we mean by the components of a vector  $\vec{A}$ , we begin with a rectangular (Cartesian) coordinate system of axes (**Fig. 1.16**). If we think of  $\vec{A}$  as a displacement vector, we can regard  $\vec{A}$  as the sum of a displacement parallel to the  $x$ -axis and a displacement parallel to the  $y$ -axis. We use the numbers  $A_x$  and  $A_y$  to tell us how much displacement there is parallel to the  $x$ -axis and how much there is parallel to the  $y$ -axis, respectively. For example, if the  $+x$ -axis points east and the  $+y$ -axis points north,  $\vec{A}$  in Fig. 1.16 could be the sum of a 2.00 m displacement to the east and a 1.00 m displacement to the north. Then  $A_x = +2.00$  m and  $A_y = +1.00$  m. We can use the same idea for any vectors, not just displacement vectors. The two numbers  $A_x$  and  $A_y$  are called the **components** of  $\vec{A}$ .



**CAUTION Components are not vectors** The components  $A_x$  and  $A_y$  of a vector  $\vec{A}$  are numbers; they are *not* vectors themselves. This is why we print the symbols for components in lightface italic type with *no* arrow on top instead of in boldface italic with an arrow, which is reserved for vectors. **|**

Figure 1.16 Representing a vector  $\vec{A}$  in terms of its components  $A_x$  and  $A_y$ .

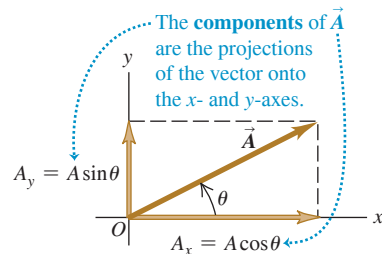

In this case, both  $A_x$  and  $A_y$  are positive.

Figure 1.17 The components of a vector may be positive or negative numbers.

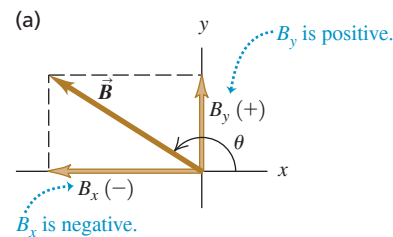

We can calculate the components of vector  $\vec{A}$  if we know its magnitude  $A$  and its direction. We'll describe the direction of a vector by its angle relative to some reference direction. In Fig. 1.16 this reference direction is the positive  $x$ -axis, and the angle between vector  $\vec{A}$  and the positive  $x$ -axis is  $\theta$  (the Greek letter theta). Imagine that vector  $\vec{A}$  originally lies along the  $+x$ -axis and that you then rotate it to its true direction, as indicated by the arrow in Fig. 1.16 on the arc for angle  $\theta$ . If this rotation is from the  $+x$ -axis toward the  $+y$ -axis, as is the case in Fig. 1.16, then  $\theta$  is *positive*; if the rotation is from the  $+x$ -axis toward the  $-y$ -axis, then  $\theta$  is *negative*. Thus the  $+y$ -axis is at an angle of  $90^\circ$ , the  $-x$ -axis at  $180^\circ$ , and the  $-y$ -axis at  $270^\circ$  (or  $-90^\circ$ ). If  $\theta$  is measured in this way, then from the definition of the trigonometric functions,

$$\frac{A_x}{A} = \cos \theta \quad \text{and} \quad \frac{A_y}{A} = \sin \theta \tag{1.5}$$

$$A_x = A \cos \theta \quad \text{and} \quad A_y = A \sin \theta$$

( $\theta$  measured from the  $+x$ -axis, rotating toward the  $+y$ -axis)

In Fig. 1.16  $A_x$  and  $A_y$  are positive. This is consistent with Eqs. (1.5);  $\theta$  is in the first quadrant (between  $0^\circ$  and  $90^\circ$ ), and both the cosine and the sine of an angle in this quadrant are positive. But in **Fig. 1.17a** the component  $B_x$  is negative and the component  $B_y$  is positive. (If the  $+x$ -axis points east and the  $+y$ -axis points north,  $\vec{B}$  could represent a displacement of 2.00 m west and 1.00 m north. Since west is in the  $-x$ -direction and north is in the  $+y$ -direction,  $B_x = -2.00$  m is negative and  $B_y = +1.00$  m is positive.) Again,

this is consistent with Eqs. (1.5); now  $\theta$  is in the second quadrant, so  $\cos \theta$  is negative and  $\sin \theta$  is positive. In Fig. 1.17b both  $C_x$  and  $C_y$  are negative (both  $\cos \theta$  and  $\sin \theta$  are negative in the third quadrant).


**CAUTION** **Relating a vector's magnitude and direction to its components** Equations (1.5) are correct *only* when the angle  $\theta$  is measured from the positive  $x$ -axis. If the angle of the vector is given from a different reference direction or you use a different rotation direction, the relationships are different! Example 1.6 illustrates this point. **|**

### EXAMPLE 1.6 Finding components

(a) What are the  $x$ - and  $y$ -components of vector  $\vec{D}$  in Fig. 1.18a? The magnitude of the vector is  $D = 3.00$  m, and angle  $\alpha = 45^\circ$ . (b) What are the  $x$ - and  $y$ -components of vector  $\vec{E}$  in Fig. 1.18b? The magnitude of the vector is  $E = 4.50$  m, and angle  $\beta = 37.0^\circ$ .

**IDENTIFY and SET UP** We can use Eqs. (1.5) to find the components of these vectors, but we must be careful: Neither angle  $\alpha$  nor  $\beta$  in Fig. 1.18 is measured from the  $+x$ -axis toward the  $+y$ -axis. We estimate from the figure that the lengths of both components in part (a) are roughly 2 m, and that those in part (b) are 3 m and 4 m. The figure indicates the signs of the components.

Figure 1.18 Calculating the  $x$ - and  $y$ -components of vectors.

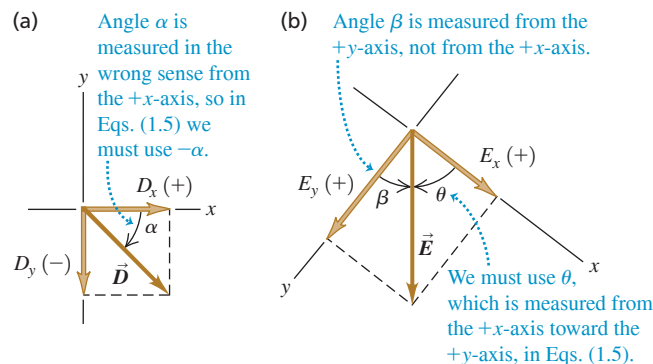

**EXECUTE** (a) The angle  $\alpha$  (the Greek letter alpha) between the positive  $x$ -axis and  $\vec{D}$  is measured toward the *negative*  $y$ -axis. The angle we must use in Eqs. (1.5) is  $\theta = -\alpha = -45^\circ$ . We then find

$$D_x = D \cos \theta = (3.00 \text{ m})(\cos(-45^\circ)) = +2.1 \text{ m}$$

$$D_y = D \sin \theta = (3.00 \text{ m})(\sin(-45^\circ)) = -2.1 \text{ m}$$

Had we carelessly substituted  $+45^\circ$  for  $\theta$  in Eqs. (1.5), our result for  $D_y$  would have had the wrong sign.

(b) The  $x$ - and  $y$ -axes in Fig. 1.18b are at right angles, so it doesn't matter that they aren't horizontal and vertical, respectively. But we can't use the angle  $\beta$  (the Greek letter beta) in Eqs. (1.5), because  $\beta$  is measured from the  $+y$ -axis. Instead, we must use the angle  $\theta = 90.0^\circ - \beta = 90.0^\circ - 37.0^\circ = 53.0^\circ$ . Then we find

$$E_x = E \cos 53.0^\circ = (4.50 \text{ m})(\cos 53.0^\circ) = +2.71 \text{ m}$$

$$E_y = E \sin 53.0^\circ = (4.50 \text{ m})(\sin 53.0^\circ) = +3.59 \text{ m}$$

**EVALUATE** Our answers to both parts are close to our predictions. But why do the answers in part (a) correctly have only two significant figures?

**KEYCONCEPT** When you are finding the components of a vector, always use a diagram of the vector and the coordinate axes to guide your calculations.

## Using Components to Do Vector Calculations

Using components makes it relatively easy to do various calculations involving vectors. Let's look at three important examples: finding a vector's magnitude and direction, multiplying a vector by a scalar, and calculating the vector sum of two or more vectors.

- 1. Finding a vector's magnitude and direction from its components.** We can describe a vector completely by giving either its magnitude and direction or its  $x$ - and  $y$ -components. Equations (1.5) show how to find the components if we know the magnitude and direction. We can also reverse the process: We can find the magnitude and direction if we know the components. By applying the Pythagorean theorem to Fig. 1.16, we find that the magnitude of vector  $\vec{A}$  is

$$A = \sqrt{A_x^2 + A_y^2} \quad (1.6)$$

(We always take the positive root.) Equation (1.6) is valid for any choice of  $x$ -axis and  $y$ -axis, as long as they are mutually perpendicular. The expression for the vector direction comes from the definition of the tangent of an angle. If  $\theta$  is measured from

Figure 1.19 Drawing a sketch of a vector reveals the signs of its  $x$ - and  $y$ -components.

Suppose that  $\tan \theta = \frac{A_y}{A_x} = +1$ . What is  $\theta$ ?

Two angles have tangents of  $+1$ :  $45^\circ$  and  $225^\circ$ . The diagram shows that  $\theta$  must be  $225^\circ$ .

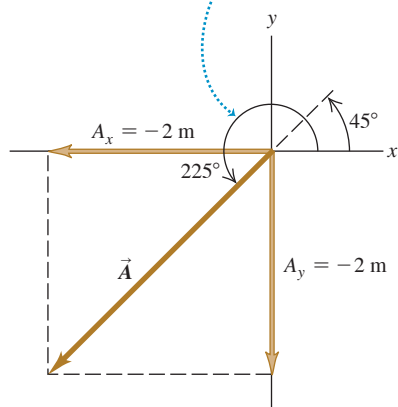


Figure 1.20 Finding the vector sum (resultant) of  $\vec{A}$  and  $\vec{B}$  using components.


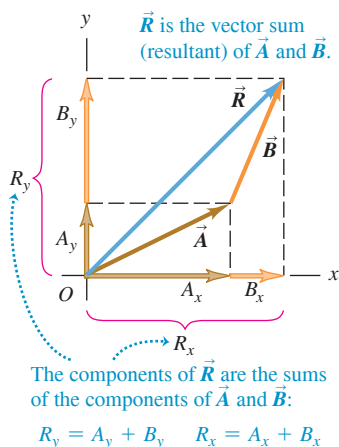


Figure 1.21 A vector in three dimensions.

In three dimensions, a vector has  $x$ -,  $y$ -, and  $z$ -components.



The magnitude of vector  $\vec{A}$  is  $A = \sqrt{A_x^2 + A_y^2 + A_z^2}$ .

the positive  $x$ -axis, and a positive angle is measured toward the positive  $y$ -axis (as in Fig. 1.16), then

$$\tan \theta = \frac{A_y}{A_x} \quad \text{and} \quad \theta = \arctan \frac{A_y}{A_x} \quad (1.7)$$

We'll always use the notation  $\arctan$  for the inverse tangent function (see Example 1.5 in Section 1.7). The notation  $\tan^{-1}$  is also commonly used, and your calculator may have an INV or 2ND button to be used with the TAN button.

**CAUTION** Finding the direction of a vector from its components There's one complication in using Eqs. (1.7) to find  $\theta$ : Any two angles that differ by  $180^\circ$  have the same tangent. For example, in Fig. 1.19 the tangent of the angle  $\theta$  is  $\tan \theta = A_y/A_x = +1$ . A calculator will tell you that  $\theta = \tan^{-1}(+1) = 45^\circ$ . But the tangent of  $180^\circ + 45^\circ = 225^\circ$  is also equal to  $+1$ , so  $\theta$  could also be  $225^\circ$  (which is actually the case in Fig. 1.19). Always draw a sketch like Fig. 1.19 to determine which of the two possibilities is correct. ■

- Multiplying a vector by a scalar.** If we multiply a vector  $\vec{A}$  by a scalar  $c$ , each component of the product  $\vec{D} = c\vec{A}$  is the product of  $c$  and the corresponding component of  $\vec{A}$ :

$$D_x = cA_x, \quad D_y = cA_y \quad (\text{components of } \vec{D} = c\vec{A}) \quad (1.8)$$

For example, Eqs. (1.8) say that each component of the vector  $2\vec{A}$  is twice as great as the corresponding component of  $\vec{A}$ , so  $2\vec{A}$  is in the same direction as  $\vec{A}$  but has twice the magnitude. Each component of the vector  $-3\vec{A}$  is three times as great as the corresponding component of  $\vec{A}$  but has the opposite sign, so  $-3\vec{A}$  is in the opposite direction from  $\vec{A}$  and has three times the magnitude. Hence Eqs. (1.8) are consistent with our discussion in Section 1.7 of multiplying a vector by a scalar (see Fig. 1.14).

- Using components to calculate the vector sum (resultant) of two or more vectors.**

Figure 1.20 shows two vectors  $\vec{A}$  and  $\vec{B}$  and their vector sum  $\vec{R}$ , along with the  $x$ - and  $y$ -components of all three vectors. The  $x$ -component  $R_x$  of the vector sum is simply the sum ( $A_x + B_x$ ) of the  $x$ -components of the vectors being added. The same is true for the  $y$ -components. In symbols,

$$\begin{aligned} \text{Each component of } \vec{R} = \vec{A} + \vec{B} \dots \\ R_x = A_x + B_x, \quad R_y = A_y + B_y \quad (1.9) \\ \dots \text{ is the sum of the corresponding components of } \vec{A} \text{ and } \vec{B}. \end{aligned}$$

Figure 1.20 shows this result for the case in which the components  $A_x$ ,  $A_y$ ,  $B_x$ , and  $B_y$  are all positive. Draw additional diagrams to verify for yourself that Eqs. (1.9) are valid for any signs of the components of  $\vec{A}$  and  $\vec{B}$ .

If we know the components of any two vectors  $\vec{A}$  and  $\vec{B}$ , perhaps by using Eqs. (1.5), we can compute the components of the vector sum  $\vec{R}$ . Then if we need the magnitude and direction of  $\vec{R}$ , we can obtain them from Eqs. (1.6) and (1.7) with the  $A$ 's replaced by  $R$ 's.

We can use the same procedure to find the sum of any number of vectors. If  $\vec{R}$  is the vector sum of  $\vec{A}, \vec{B}, \vec{C}, \vec{D}, \vec{E}, \dots$ , the components of  $\vec{R}$  are

$$\begin{aligned} R_x &= A_x + B_x + C_x + D_x + E_x + \dots \\ R_y &= A_y + B_y + C_y + D_y + E_y + \dots \end{aligned} \quad (1.10)$$

We have talked about vectors that lie in the  $xy$ -plane only, but the component method works just as well for vectors having any direction in space. We can introduce a  $z$ -axis perpendicular to the  $xy$ -plane; then in general a vector  $\vec{A}$  has components  $A_x, A_y$ , and  $A_z$  in the three coordinate directions. Its magnitude  $A$  is

$$A = \sqrt{A_x^2 + A_y^2 + A_z^2} \quad (1.11)$$

Again, we always take the positive root (Fig. 1.21). Also, Eqs. (1.10) for the vector sum  $\vec{R}$  have a third component:

$$R_z = A_z + B_z + C_z + D_z + E_z + \dots$$

We've focused on adding *displacement* vectors, but the method is applicable to all vector quantities. When we study the concept of force in Chapter 4, we'll find that forces are vectors that obey the same rules of vector addition.

### PROBLEM-SOLVING STRATEGY 1.3 Vector Addition

**IDENTIFY** *the relevant concepts:* Decide what the target variable is. It may be the magnitude of the vector sum, the direction, or both.

**SET UP** *the problem:* Sketch the vectors being added, along with suitable coordinate axes. Place the tail of the first vector at the origin of the coordinates, place the tail of the second vector at the head of the first vector, and so on. Draw the vector sum  $\vec{R}$  from the tail of the first vector (at the origin) to the head of the last vector. Use your sketch to estimate the magnitude and direction of  $\vec{R}$ . Select the equations you'll need: Eqs. (1.5) to obtain the components of the vectors given, if necessary, Eqs. (1.10) to obtain the components of the vector sum, Eq. (1.11) to obtain its magnitude, and Eqs. (1.7) to obtain its direction.

**EXECUTE** *the solution* as follows:

1. Find the  $x$ - and  $y$ -components of each individual vector and record your results in a table, as in Example 1.7 below. If a vector is described by a magnitude  $A$  and an angle  $\theta$ , measured from the  $+x$ -axis toward the  $+y$ -axis, then its components are given by Eqs. (1.5):

$$A_x = A \cos \theta \quad A_y = A \sin \theta$$

If the angles of the vectors are given in some other way, perhaps using a different reference direction, convert them to angles measured from the  $+x$ -axis as in Example 1.6.

2. Add the individual  $x$ -components algebraically (including signs) to find  $R_x$ , the  $x$ -component of the vector sum. Do the same for the  $y$ -components to find  $R_y$ . See Example 1.7.
3. Calculate the magnitude  $R$  and direction  $\theta$  of the vector sum by using Eqs. (1.6) and (1.7):

$$R = \sqrt{R_x^2 + R_y^2} \quad \theta = \arctan \frac{R_y}{R_x}$$

**EVALUATE** *your answer:* Confirm that your results for the magnitude and direction of the vector sum agree with the estimates you made from your sketch. The value of  $\theta$  that you find with a calculator may be off by  $180^\circ$ ; your drawing will indicate the correct value. (See Example 1.7 below for an illustration of this.)

### EXAMPLE 1.7 Using components to add vectors

### WITH VARIATION PROBLEMS

Three players on a reality TV show are brought to the center of a large, flat field. Each is given a meter stick, a compass, a calculator, a shovel, and (in a different order for each contestant) the following three displacements:

- $\vec{A}$ : 72.4 m,  $32.0^\circ$  east of north
- $\vec{B}$ : 57.3 m,  $36.0^\circ$  south of west
- $\vec{C}$ : 17.8 m due south

The three displacements lead to the point in the field where the keys to a new Porsche are buried. Two players start measuring immediately, but the winner first *calculates* where to go. What does she calculate?

**IDENTIFY and SET UP** The goal is to find the sum (resultant) of the three displacements, so this is a problem in vector addition. See Fig. 1.22. We have chosen the  $+x$ -axis as east and the  $+y$ -axis as north. We estimate from the diagram that the vector sum  $\vec{R}$  is about 10 m,  $40^\circ$  west of north (so  $\theta$  is about  $90^\circ$  plus  $40^\circ$ , or about  $130^\circ$ ).


**EXECUTE** The angles of the vectors, measured from the  $+x$ -axis toward the  $+y$ -axis, are  $(90.0^\circ - 32.0^\circ) = 58.0^\circ$ ,  $(180.0^\circ + 36.0^\circ) = 216.0^\circ$ , and  $270.0^\circ$ , respectively. We may now use Eqs. (1.5) to find the components of  $\vec{A}$ :

$$A_x = A \cos \theta_A = (72.4 \text{ m})(\cos 58.0^\circ) = 38.37 \text{ m}$$

$$A_y = A \sin \theta_A = (72.4 \text{ m})(\sin 58.0^\circ) = 61.40 \text{ m}$$

We've kept an extra significant figure in the components; we'll round to the correct number of significant figures at the end of our calculation. The table at right shows the components of all the displacements, the addition of the components, and the other calculations from Eqs. (1.6) and (1.7).

Figure 1.22 Three successive displacements  $\vec{A}$ ,  $\vec{B}$ , and  $\vec{C}$  and the resultant (vector sum) displacement  $\vec{R} = \vec{A} + \vec{B} + \vec{C}$ .

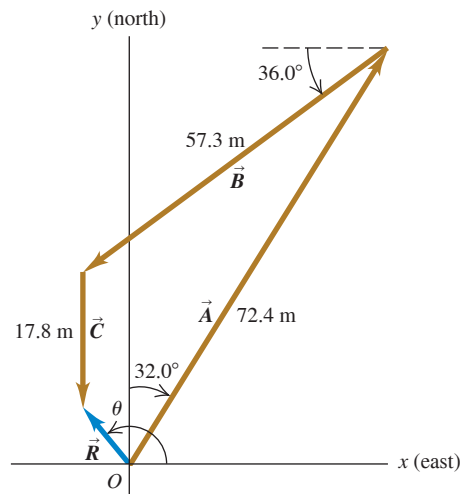

Distance	Angle	$x$ -component	$y$ -component
$A = 72.4 \text{ m}$	$58.0^\circ$	$38.37 \text{ m}$	$61.40 \text{ m}$
$B = 57.3 \text{ m}$	$216.0^\circ$	$-46.36 \text{ m}$	$-33.68 \text{ m}$
$C = 17.8 \text{ m}$	$270.0^\circ$	$0.00 \text{ m}$	$-17.80 \text{ m}$
		$R_x = -7.99 \text{ m}$	$R_y = 9.92 \text{ m}$

$$R = \sqrt{(-7.99 \text{ m})^2 + (9.92 \text{ m})^2} = 12.7 \text{ m}$$

$$\theta = \arctan \frac{9.92 \text{ m}}{-7.99 \text{ m}} = -51^\circ$$

Continued

Comparing to angle  $\theta$  in Fig. 1.22 shows that the calculated angle is clearly off by  $180^\circ$ . The correct value is  $\theta = 180^\circ + (-51^\circ) = 129^\circ$ , or  $39^\circ$  west of north.

**EVALUATE** Our calculated answers for  $R$  and  $\theta$  agree with our estimates. Notice how drawing the diagram in Fig. 1.22 made it easy to avoid a  $180^\circ$  error in the direction of the vector sum.

**KEYCONCEPT** When you are adding vectors, the  $x$ -component of the vector sum is equal to the sum of the  $x$ -components of the vectors being added, and likewise for the  $y$ -component. Always use a diagram to help determine the direction of the vector sum.

**TEST YOUR UNDERSTANDING OF SECTION 1.8** Two vectors  $\vec{A}$  and  $\vec{B}$  lie in the  $xy$ -plane. (a) Can  $\vec{A}$  have the same magnitude as  $\vec{B}$  but different components? (b) Can  $\vec{A}$  have the same components as  $\vec{B}$  but a different magnitude?

**ANSWER** (a) **yes**, (b) **no** Vectors  $\vec{A}$  and  $\vec{B}$  can have the same magnitude but different components if they point in different directions. If they have the same components, however, they are the same vector. (a) **yes**, (b) **no** Vectors  $\vec{A}$  and  $\vec{B}$  can have the same magnitude but different components if they point in different directions. If they have the same components, however, they are the same vector.

### 1.9 UNIT VECTORS

A **unit vector** is a vector that has a magnitude of 1, with no units. Its only purpose is to *point*—that is, to describe a direction in space. Unit vectors provide a convenient notation for many expressions involving components of vectors. We'll always include a caret, or "hat" ( $\wedge$ ), in the symbol for a unit vector to distinguish it from ordinary vectors whose magnitude may or may not be equal to 1.

In an  $xy$ -coordinate system we can define a unit vector  $\hat{i}$  that points in the direction of the positive  $x$ -axis and a unit vector  $\hat{j}$  that points in the direction of the positive  $y$ -axis (Fig. 1.23a). Then we can write a vector  $\vec{A}$  in terms of its components as

$$\vec{A} = A_x \hat{i} + A_y \hat{j} \quad (1.12)$$

Equation (1.12) is a vector equation; each term, such as  $A_x \hat{i}$ , is a vector quantity (Fig. 1.23b).

Using unit vectors, we can express the vector sum  $\vec{R}$  of two vectors  $\vec{A}$  and  $\vec{B}$  as follows:

$$\begin{aligned} \vec{A} &= A_x \hat{i} + A_y \hat{j} \\ \vec{B} &= B_x \hat{i} + B_y \hat{j} \\ \vec{R} &= \vec{A} + \vec{B} \\ &= (A_x \hat{i} + A_y \hat{j}) + (B_x \hat{i} + B_y \hat{j}) \\ &= (A_x + B_x) \hat{i} + (A_y + B_y) \hat{j} \\ &= R_x \hat{i} + R_y \hat{j} \end{aligned} \quad (1.13)$$

Equation (1.13) restates the content of Eqs. (1.9) in the form of a single vector equation rather than two component equations.

If not all of the vectors lie in the  $xy$ -plane, then we need a third component. We introduce a third unit vector  $\hat{k}$  that points in the direction of the positive  $z$ -axis (Fig. 1.24). Then Eqs. (1.12) and (1.13) become

Figure 1.23 (a) The unit vectors  $\hat{i}$  and  $\hat{j}$ . (b) Expressing a vector  $\vec{A}$  in terms of its components.


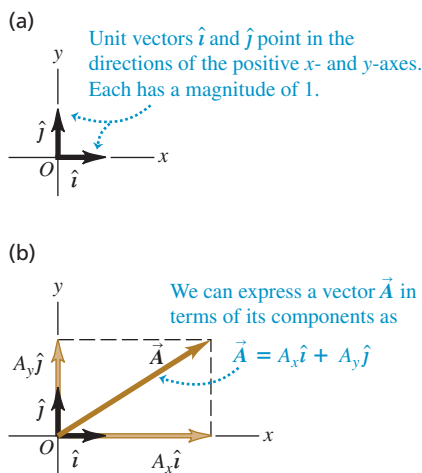


Figure 1.24 The unit vectors  $\hat{i}$ ,  $\hat{j}$ , and  $\hat{k}$ .

Unit vectors  $\hat{i}$ ,  $\hat{j}$ , and  $\hat{k}$  point in the directions of the positive  $x$ -,  $y$ -, and  $z$ -axes. Each has a magnitude of 1.



Any vector can be expressed in terms of its  $x$ -,  $y$ -, and  $z$ -components ...

$$\begin{aligned} \vec{A} &= A_x \hat{i} + A_y \hat{j} + A_z \hat{k} \\ \vec{B} &= B_x \hat{i} + B_y \hat{j} + B_z \hat{k} \\ &\dots \text{and unit vectors } \hat{i}, \hat{j}, \text{ and } \hat{k}. \end{aligned} \quad (1.14)$$

$$\begin{aligned} \vec{R} &= (A_x + B_x) \hat{i} + (A_y + B_y) \hat{j} + (A_z + B_z) \hat{k} \\ &= R_x \hat{i} + R_y \hat{j} + R_z \hat{k} \end{aligned} \quad (1.15)$$



**EXAMPLE 1.8** Using unit vectors

Given the two displacements

$$\vec{D} = (6.00\hat{i} + 3.00\hat{j} - 1.00\hat{k}) \text{ m} \quad \text{and} \\ \vec{E} = (4.00\hat{i} - 5.00\hat{j} + 8.00\hat{k}) \text{ m}$$

find the magnitude of the displacement  $2\vec{D} - \vec{E}$ .

**IDENTIFY and SET UP** We are to multiply vector  $\vec{D}$  by 2 (a scalar) and subtract vector  $\vec{E}$  from the result, so as to obtain the vector  $\vec{F} = 2\vec{D} - \vec{E}$ . Equation (1.8) says that to multiply  $\vec{D}$  by 2, we multiply each of its components by 2. We can use Eq. (1.15) to do the subtraction; recall from Section 1.7 that subtracting a vector is the same as adding the negative of that vector.

**EXECUTE** We have

$$\vec{F} = 2(6.00\hat{i} + 3.00\hat{j} - 1.00\hat{k}) \text{ m} - (4.00\hat{i} - 5.00\hat{j} + 8.00\hat{k}) \text{ m} \\ = [(12.00 - 4.00)\hat{i} + (6.00 + 5.00)\hat{j} + (-2.00 - 8.00)\hat{k}] \text{ m} \\ = (8.00\hat{i} + 11.00\hat{j} - 10.00\hat{k}) \text{ m}$$

From Eq. (1.11) the magnitude of  $\vec{F}$  is

$$F = \sqrt{F_x^2 + F_y^2 + F_z^2} \\ = \sqrt{(8.00 \text{ m})^2 + (11.00 \text{ m})^2 + (-10.00 \text{ m})^2} \\ = 16.9 \text{ m}$$

**EVALUATE** Our answer is of the same order of magnitude as the larger components that appear in the sum. We wouldn't expect our answer to be much larger than this, but it could be much smaller.

**KEYCONCEPT** By using unit vectors, you can write a single equation for vector addition that incorporates the  $x$ -,  $y$ -, and  $z$ -components.

**TEST YOUR UNDERSTANDING OF SECTION 1.9** Arrange the following vectors in order of their magnitude, with the vector of largest magnitude first. (i)  $\vec{A} = (3\hat{i} + 5\hat{j} - 2\hat{k}) \text{ m}$ ; (ii)  $\vec{B} = (-3\hat{i} + 5\hat{j} - 2\hat{k}) \text{ m}$ ; (iii)  $\vec{C} = (3\hat{i} - 5\hat{j} - 2\hat{k}) \text{ m}$ ; (iv)  $\vec{D} = (3\hat{i} + 5\hat{j} + 2\hat{k}) \text{ m}$ .

**ANSWER**  $A = B = C = D = 6.29 \text{ m}$

**| All have the same magnitude.** Vectors  $\vec{A}$ ,  $\vec{B}$ ,  $\vec{C}$ , and  $\vec{D}$  point in different directions but have the same magnitude.

**1.10 PRODUCTS OF VECTORS**

We saw how vector addition develops naturally from the problem of combining displacements. It will prove useful for calculations with many other vector quantities. We can also express many physical relationships by using *products* of vectors. Vectors are not ordinary numbers, so we can't directly apply ordinary multiplication to vectors. We'll define two different kinds of products of vectors. The first, called the *scalar product*, yields a result that is a scalar quantity. The second, the *vector product*, yields another vector.

**Scalar Product**

We denote the **scalar product** of two vectors  $\vec{A}$  and  $\vec{B}$  by  $\vec{A} \cdot \vec{B}$ . Because of this notation, the scalar product is also called the **dot product**. Although  $\vec{A}$  and  $\vec{B}$  are vectors, the quantity  $\vec{A} \cdot \vec{B}$  is a scalar.

To define the scalar product  $\vec{A} \cdot \vec{B}$  we draw the two vectors  $\vec{A}$  and  $\vec{B}$  with their tails at the same point (**Fig. 1.25a**). The angle  $\phi$  (the Greek letter phi) between their directions ranges from  $0^\circ$  to  $180^\circ$ . Figure 1.25b shows the projection of vector  $\vec{B}$  onto the direction of  $\vec{A}$ ; this projection is the component of  $\vec{B}$  in the direction of  $\vec{A}$  and is equal to  $B \cos \phi$ . (We can take components along *any* direction that's convenient, not just the  $x$ - and  $y$ -axes.) We define  $\vec{A} \cdot \vec{B}$  to be the magnitude of  $\vec{A}$  multiplied by the component of  $\vec{B}$  in the direction of  $\vec{A}$ , or

$$\vec{A} \cdot \vec{B} = AB \cos \phi = |\vec{A}| |\vec{B}| \cos \phi \quad (1.16)$$

Scalar (dot) product of vectors  $\vec{A}$  and  $\vec{B}$

Magnitudes of  $\vec{A}$  and  $\vec{B}$

Angle between  $\vec{A}$  and  $\vec{B}$  when placed tail to tail

Figure 1.25 Calculating the scalar product of two vectors,  $\vec{A} \cdot \vec{B} = AB \cos \phi$ .


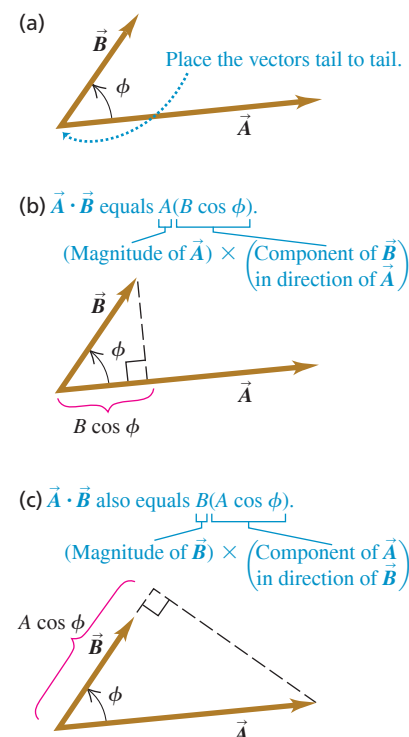


Figure 1.26 The scalar product  $\vec{A} \cdot \vec{B} = AB \cos \phi$  can be positive, negative, or zero, depending on the angle between  $\vec{A}$  and  $\vec{B}$ .

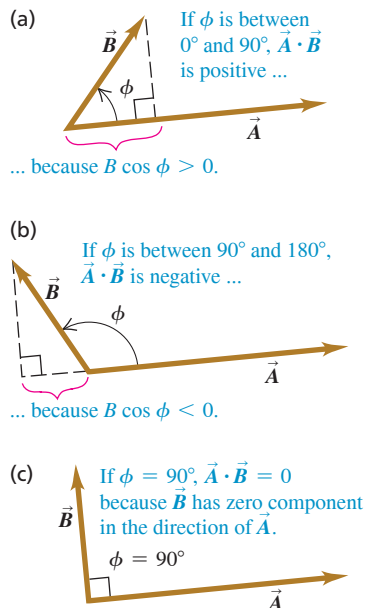

Alternatively, we can define  $\vec{A} \cdot \vec{B}$  to be the magnitude of  $\vec{B}$  multiplied by the component of  $\vec{A}$  in the direction of  $\vec{B}$ , as in Fig. 1.25c. Hence  $\vec{A} \cdot \vec{B} = B(A \cos \phi) = AB \cos \phi$ , which is the same as Eq. (1.16).

The scalar product is a scalar quantity, not a vector, and it may be positive, negative, or zero. When  $\phi$  is between  $0^\circ$  and  $90^\circ$ ,  $\cos \phi > 0$  and the scalar product is positive (Fig. 1.26a). When  $\phi$  is between  $90^\circ$  and  $180^\circ$  so  $\cos \phi < 0$ , the component of  $\vec{B}$  in the direction of  $\vec{A}$  is negative, and  $\vec{A} \cdot \vec{B}$  is negative (Fig. 1.26b). Finally, when  $\phi = 90^\circ$ ,  $\vec{A} \cdot \vec{B} = 0$  (Fig. 1.26c). *The scalar product of two perpendicular vectors is always zero.*

For any two vectors  $\vec{A}$  and  $\vec{B}$ ,  $AB \cos \phi = BA \cos \phi$ . This means that  $\vec{A} \cdot \vec{B} = \vec{B} \cdot \vec{A}$ . The scalar product obeys the commutative law of multiplication; the order of the two vectors does not matter.

We'll use the scalar product in Chapter 6 to describe work done by a force. In later chapters we'll use the scalar product for a variety of purposes, from calculating electric potential to determining the effects that varying magnetic fields have on electric circuits.

### Using Components to Calculate the Scalar Product

We can calculate the scalar product  $\vec{A} \cdot \vec{B}$  directly if we know the  $x$ -,  $y$ -, and  $z$ -components of  $\vec{A}$  and  $\vec{B}$ . To see how this is done, let's first work out the scalar products of the unit vectors  $\hat{i}$ ,  $\hat{j}$ , and  $\hat{k}$ . All unit vectors have magnitude 1 and are perpendicular to each other. Using Eq. (1.16), we find

$$\begin{aligned}\hat{i} \cdot \hat{i} &= \hat{j} \cdot \hat{j} = \hat{k} \cdot \hat{k} = (1)(1) \cos 0^\circ = 1 \\ \hat{i} \cdot \hat{j} &= \hat{i} \cdot \hat{k} = \hat{j} \cdot \hat{k} = (1)(1) \cos 90^\circ = 0\end{aligned}\quad (1.17)$$

Now we express  $\vec{A}$  and  $\vec{B}$  in terms of their components, expand the product, and use these products of unit vectors:

$$\begin{aligned}\vec{A} \cdot \vec{B} &= (A_x \hat{i} + A_y \hat{j} + A_z \hat{k}) \cdot (B_x \hat{i} + B_y \hat{j} + B_z \hat{k}) \\ &= A_x \hat{i} \cdot B_x \hat{i} + A_x \hat{i} \cdot B_y \hat{j} + A_x \hat{i} \cdot B_z \hat{k} \\ &\quad + A_y \hat{j} \cdot B_x \hat{i} + A_y \hat{j} \cdot B_y \hat{j} + A_y \hat{j} \cdot B_z \hat{k} \\ &\quad + A_z \hat{k} \cdot B_x \hat{i} + A_z \hat{k} \cdot B_y \hat{j} + A_z \hat{k} \cdot B_z \hat{k} \\ &= A_x B_x \hat{i} \cdot \hat{i} + A_x B_y \hat{i} \cdot \hat{j} + A_x B_z \hat{i} \cdot \hat{k} \\ &\quad + A_y B_x \hat{j} \cdot \hat{i} + A_y B_y \hat{j} \cdot \hat{j} + A_y B_z \hat{j} \cdot \hat{k} \\ &\quad + A_z B_x \hat{k} \cdot \hat{i} + A_z B_y \hat{k} \cdot \hat{j} + A_z B_z \hat{k} \cdot \hat{k}\end{aligned}\quad (1.18)$$

From Eqs. (1.17) you can see that six of these nine terms are zero. The three that survive give

$$\vec{A} \cdot \vec{B} = A_x B_x + A_y B_y + A_z B_z \quad (1.19)$$

Scalar (dot) product of vectors  $\vec{A}$  and  $\vec{B}$   
Components of  $\vec{A}$   
Components of  $\vec{B}$

Thus *the scalar product of two vectors is the sum of the products of their respective components.*

The scalar product gives a straightforward way to find the angle  $\phi$  between any two vectors  $\vec{A}$  and  $\vec{B}$  whose components are known. In this case we can use Eq. (1.19) to find the scalar product of  $\vec{A}$  and  $\vec{B}$ . Example 1.10 shows how to do this.


### EXAMPLE 1.9 Calculating a scalar product

WITH **VARIATION** PROBLEMS

Find the scalar product  $\vec{A} \cdot \vec{B}$  of the two vectors in **Fig. 1.27**. The magnitudes of the vectors are  $A = 4.00$  and  $B = 5.00$ .

**IDENTIFY and SET UP** We can calculate the scalar product in two ways: using the magnitudes of the vectors and the angle between them (Eq. 1.16) and using the components of the vectors (Eq. 1.19). We'll do it both ways, and the results will check each other.

Figure 1.27 Two vectors  $\vec{A}$  and  $\vec{B}$  in two dimensions.

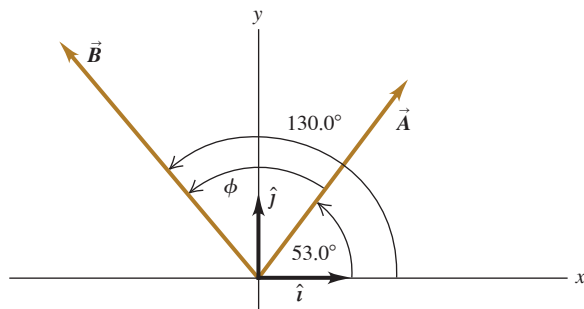

**EXECUTE** The angle between the two vectors  $\vec{A}$  and  $\vec{B}$  is  $\phi = 130.0^\circ - 53.0^\circ = 77.0^\circ$ , so Eq. (1.16) gives us

$$\vec{A} \cdot \vec{B} = AB \cos \phi = (4.00)(5.00) \cos 77.0^\circ = 4.50$$

To use Eq. (1.19), we must first find the components of the vectors. The angles of  $\vec{A}$  and  $\vec{B}$  are given with respect to the  $+x$ -axis and are measured in the sense from the  $+x$ -axis to the  $+y$ -axis, so we can use Eqs. (1.5):

$$A_x = (4.00) \cos 53.0^\circ = 2.407$$

$$A_y = (4.00) \sin 53.0^\circ = 3.195$$

$$B_x = (5.00) \cos 130.0^\circ = -3.214$$

$$B_y = (5.00) \sin 130.0^\circ = 3.830$$

As in Example 1.7, we keep an extra significant figure in the components and round at the end. Equation (1.19) now gives us

$$\begin{aligned} \vec{A} \cdot \vec{B} &= A_x B_x + A_y B_y + A_z B_z \\ &= (2.407)(-3.214) + (3.195)(3.830) + (0)(0) = 4.50 \end{aligned}$$

**EVALUATE** Both methods give the same result, as they should.

**KEYCONCEPT** The scalar product  $\vec{A} \cdot \vec{B}$  is a scalar (a number) that equals the sum of the products of the  $x$ -components,  $y$ -components, and  $z$ -components of  $\vec{A}$  and  $\vec{B}$ .

### EXAMPLE 1.10 Finding an angle with the scalar product

WITH **VARIATION** PROBLEMS

Find the angle between the vectors

$$\vec{A} = 2.00\hat{i} + 3.00\hat{j} + 1.00\hat{k}$$

and

$$\vec{B} = -4.00\hat{i} + 2.00\hat{j} - 1.00\hat{k}$$

**IDENTIFY and SET UP** We're given the  $x$ -,  $y$ -, and  $z$ -components of two vectors. Our target variable is the angle  $\phi$  between them (**Fig. 1.28**). To find this, we'll solve Eq. (1.16),  $\vec{A} \cdot \vec{B} = AB \cos \phi$ , for  $\phi$  in terms of the scalar product  $\vec{A} \cdot \vec{B}$  and the magnitudes  $A$  and  $B$ . We can use Eq. (1.19) to evaluate the scalar product,  $\vec{A} \cdot \vec{B} = A_x B_x + A_y B_y + A_z B_z$ , and we can use Eq. (1.6) to find  $A$  and  $B$ .

**EXECUTE** We solve Eq. (1.16) for  $\cos \phi$  and use Eq. (1.19) to write  $\vec{A} \cdot \vec{B}$ :

$$\cos \phi = \frac{\vec{A} \cdot \vec{B}}{AB} = \frac{A_x B_x + A_y B_y + A_z B_z}{AB}$$


We can use this formula to find the angle between *any* two vectors  $\vec{A}$  and  $\vec{B}$ . Here we have  $A_x = 2.00$ ,  $A_y = 3.00$ , and  $A_z = 1.00$ , and  $B_x = -4.00$ ,  $B_y = 2.00$ , and  $B_z = -1.00$ . Thus

$$\begin{aligned} \vec{A} \cdot \vec{B} &= A_x B_x + A_y B_y + A_z B_z \\ &= (2.00)(-4.00) + (3.00)(2.00) + (1.00)(-1.00) \\ &= -3.00 \end{aligned}$$

$$\begin{aligned} A &= \sqrt{A_x^2 + A_y^2 + A_z^2} = \sqrt{(2.00)^2 + (3.00)^2 + (1.00)^2} \\ &= \sqrt{14.00} \end{aligned}$$

$$\begin{aligned} B &= \sqrt{B_x^2 + B_y^2 + B_z^2} = \sqrt{(-4.00)^2 + (2.00)^2 + (-1.00)^2} \\ &= \sqrt{21.00} \end{aligned}$$

Figure 1.28 Two vectors in three dimensions.

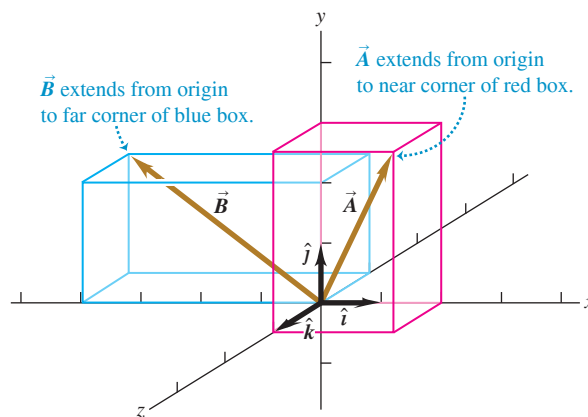


$$\begin{aligned} \cos \phi &= \frac{A_x B_x + A_y B_y + A_z B_z}{AB} = \frac{-3.00}{\sqrt{14.00} \sqrt{21.00}} = -0.175 \\ \phi &= 100^\circ \end{aligned}$$

**EVALUATE** As a check on this result, note that the scalar product  $\vec{A} \cdot \vec{B}$  is negative. This means that  $\phi$  is between  $90^\circ$  and  $180^\circ$  (see Fig. 1.26), which agrees with our answer.

**KEYCONCEPT** You can find the angle  $\phi$  between two vectors  $\vec{A}$  and  $\vec{B}$  whose components are known by first finding their scalar product, then using the equation  $\vec{A} \cdot \vec{B} = AB \cos \phi$ .


Figure 1.29 The vector product of (a)  $\vec{A} \times \vec{B}$  and (b)  $\vec{B} \times \vec{A}$ .

(a) Using the right-hand rule to find the direction of  $\vec{A} \times \vec{B}$

- ① Place  $\vec{A}$  and  $\vec{B}$  tail to tail.
  - ② Point fingers of right hand along  $\vec{A}$ , with palm facing  $\vec{B}$ .
  - ③ Curl fingers toward  $\vec{B}$ .
  - ④ Thumb points in direction of  $\vec{A} \times \vec{B}$ .
- 

(b) Using the right-hand rule to find the direction of  $\vec{B} \times \vec{A} = -\vec{A} \times \vec{B}$

(vector product is anticommutative)

- ① Place  $\vec{B}$  and  $\vec{A}$  tail to tail.
  - ② Point fingers of right hand along  $\vec{B}$ , with palm facing  $\vec{A}$ .
  - ③ Curl fingers toward  $\vec{A}$ .
  - ④ Thumb points in direction of  $\vec{B} \times \vec{A}$ .
  - ⑤  $\vec{B} \times \vec{A}$  has same magnitude as  $\vec{A} \times \vec{B}$  but points in opposite direction.
- 

## Vector Product

We denote the **vector product** of two vectors  $\vec{A}$  and  $\vec{B}$ , also called the **cross product**, by  $\vec{A} \times \vec{B}$ . As the name suggests, the vector product is itself a vector. We'll use this product in Chapter 10 to describe torque and angular momentum; in Chapters 27 and 28 we'll use it to describe magnetic fields and forces.

To define the vector product  $\vec{A} \times \vec{B}$ , we again draw the two vectors  $\vec{A}$  and  $\vec{B}$  with their tails at the same point (Fig. 1.29a). The two vectors then lie in a plane. We define the vector product to be a vector quantity with a direction perpendicular to this plane (that is, perpendicular to both  $\vec{A}$  and  $\vec{B}$ ) and a magnitude equal to  $AB \sin \phi$ . That is, if  $\vec{C} = \vec{A} \times \vec{B}$ , then

$$C = AB \sin \phi \quad (1.20)$$

Magnitude of vector (cross) product of vectors  $\vec{B}$  and  $\vec{A}$

Magnitudes of  $\vec{A}$  and  $\vec{B}$       Angle between  $\vec{A}$  and  $\vec{B}$  when placed tail to tail


We measure the angle  $\phi$  from  $\vec{A}$  toward  $\vec{B}$  and take it to be the smaller of the two possible angles, so  $\phi$  ranges from  $0^\circ$  to  $180^\circ$ . Then  $\sin \phi \geq 0$  and  $C$  in Eq. (1.20) is never negative, as must be the case for a vector magnitude. Note that when  $\vec{A}$  and  $\vec{B}$  are parallel or antiparallel,  $\phi = 0^\circ$  or  $180^\circ$  and  $C = 0$ . That is, *the vector product of two parallel or antiparallel vectors is always zero*. In particular, *the vector product of any vector with itself is zero*.

**CAUTION** **Vector product vs. scalar product** Don't confuse the expression  $AB \sin \phi$  for the magnitude of the vector product  $\vec{A} \times \vec{B}$  with the similar expression  $AB \cos \phi$  for the scalar product  $\vec{A} \cdot \vec{B}$ . To see the difference between these two expressions, imagine that we vary the angle between  $\vec{A}$  and  $\vec{B}$  while keeping their magnitudes constant. When  $\vec{A}$  and  $\vec{B}$  are parallel, the magnitude of the vector product will be zero and the scalar product will be maximum. When  $\vec{A}$  and  $\vec{B}$  are perpendicular, the magnitude of the vector product will be maximum and the scalar product will be zero.  $\blacksquare$

Figure 1.30 Calculating the magnitude  $AB \sin \phi$  of the vector product of two vectors,  $\vec{A} \times \vec{B}$ .


(a)

(Magnitude of  $\vec{A} \times \vec{B}$ ) equals  $A(B \sin \phi)$ .

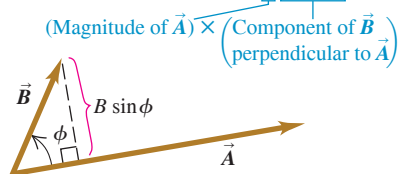

(b)

(Magnitude of  $\vec{A} \times \vec{B}$ ) also equals  $B(A \sin \phi)$ .

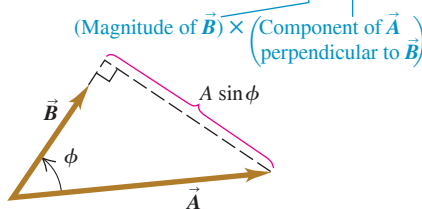

There are always *two* directions perpendicular to a given plane, one on each side of the plane. We choose which of these is the direction of  $\vec{A} \times \vec{B}$  as follows. Imagine rotating vector  $\vec{A}$  about the perpendicular line until  $\vec{A}$  is aligned with  $\vec{B}$ , choosing the smaller of the two possible angles between  $\vec{A}$  and  $\vec{B}$ . Curl the fingers of your right hand around the perpendicular line so that your fingertips point in the direction of rotation; your thumb will then point in the direction of  $\vec{A} \times \vec{B}$ . Figure 1.29a shows this **right-hand rule** and describes a second way to think about this rule.

Similarly, we determine the direction of  $\vec{B} \times \vec{A}$  by rotating  $\vec{B}$  into  $\vec{A}$  as in Fig. 1.29b. The result is a vector that is *opposite* to the vector  $\vec{A} \times \vec{B}$ . The vector product is *not* commutative but instead is *anticommutative*: For any two vectors  $\vec{A}$  and  $\vec{B}$ ,

$$\vec{A} \times \vec{B} = -\vec{B} \times \vec{A} \quad (1.21)$$

Just as we did for the scalar product, we can give a geometrical interpretation of the magnitude of the vector product. In Fig. 1.30a,  $B \sin \phi$  is the component of vector  $\vec{B}$  that is *perpendicular* to the direction of vector  $\vec{A}$ . From Eq. (1.20) the magnitude of  $\vec{A} \times \vec{B}$  equals the magnitude of  $\vec{A}$  multiplied by the component of  $\vec{B}$  that is perpendicular to  $\vec{A}$ . Figure 1.30b shows that the magnitude of  $\vec{A} \times \vec{B}$  also equals the magnitude of  $\vec{B}$  multiplied by the component of  $\vec{A}$  that is perpendicular to  $\vec{B}$ . Note that Fig. 1.30 shows the case in which  $\phi$  is between  $0^\circ$  and  $90^\circ$ ; draw a similar diagram for  $\phi$  between  $90^\circ$  and  $180^\circ$  to show that the same geometrical interpretation of the magnitude of  $\vec{A} \times \vec{B}$  applies.

### Using Components to Calculate the Vector Product

If we know the components of  $\vec{A}$  and  $\vec{B}$ , we can calculate the components of the vector product by using a procedure similar to that for the scalar product. First we work out the multiplication table for unit vectors  $\hat{i}$ ,  $\hat{j}$ , and  $\hat{k}$ , all three of which are perpendicular to each other (Fig. 1.31a). The vector product of any vector with itself is zero, so

$$\hat{i} \times \hat{i} = \hat{j} \times \hat{j} = \hat{k} \times \hat{k} = \mathbf{0}$$

The boldface zero is a reminder that each product is a zero *vector*—that is, one with all components equal to zero and an undefined direction. Using Eqs. (1.20) and (1.21) and the right-hand rule, we find

$$\begin{aligned} \hat{i} \times \hat{j} &= -\hat{j} \times \hat{i} = \hat{k} \\ \hat{j} \times \hat{k} &= -\hat{k} \times \hat{j} = \hat{i} \\ \hat{k} \times \hat{i} &= -\hat{i} \times \hat{k} = \hat{j} \end{aligned} \tag{1.22}$$

You can verify these equations by referring to Fig. 1.31a.

Next we express  $\vec{A}$  and  $\vec{B}$  in terms of their components and the corresponding unit vectors, and we expand the expression for the vector product:

$$\begin{aligned} \vec{A} \times \vec{B} &= (A_x \hat{i} + A_y \hat{j} + A_z \hat{k}) \times (B_x \hat{i} + B_y \hat{j} + B_z \hat{k}) \\ &= A_x \hat{i} \times B_x \hat{i} + A_x \hat{i} \times B_y \hat{j} + A_x \hat{i} \times B_z \hat{k} \\ &\quad + A_y \hat{j} \times B_x \hat{i} + A_y \hat{j} \times B_y \hat{j} + A_y \hat{j} \times B_z \hat{k} \\ &\quad + A_z \hat{k} \times B_x \hat{i} + A_z \hat{k} \times B_y \hat{j} + A_z \hat{k} \times B_z \hat{k} \end{aligned} \tag{1.23}$$

We can also rewrite the individual terms in Eq. (1.23) as  $A_x \hat{i} \times B_y \hat{j} = (A_x B_y) \hat{i} \times \hat{j}$ , and so on. Evaluating these by using the multiplication table for the unit vectors in Eqs. (1.22) and then grouping the terms, we get

$$\vec{A} \times \vec{B} = (A_y B_z - A_z B_y) \hat{i} + (A_z B_x - A_x B_z) \hat{j} + (A_x B_y - A_y B_x) \hat{k} \tag{1.24}$$

If you compare Eq. (1.24) with Eq. (1.14), you'll see that the components of  $\vec{C} = \vec{A} \times \vec{B}$  are

Components of vector (cross) product  $\vec{A} \times \vec{B}$


$$C_x = A_y B_z - A_z B_y \quad C_y = A_z B_x - A_x B_z \quad C_z = A_x B_y - A_y B_x \tag{1.25}$$

$A_x, A_y, A_z =$  components of  $\vec{A}$        $B_x, B_y, B_z =$  components of  $\vec{B}$


With the axis system of Fig. 1.31a, if we reverse the direction of the z-axis, we get the system shown in Fig. 1.31b. Then, as you may verify, the definition of the vector product gives  $\hat{i} \times \hat{j} = -\hat{k}$  instead of  $\hat{i} \times \hat{j} = \hat{k}$ . In fact, all vector products of unit vectors  $\hat{i}$ ,  $\hat{j}$ , and  $\hat{k}$  would have signs opposite to those in Eqs. (1.22). So there are two kinds of coordinate systems, which differ in the signs of the vector products of unit vectors. An axis system in which  $\hat{i} \times \hat{j} = \hat{k}$ , as in Fig. 1.31a, is called a **right-handed system**. The usual practice is to use *only* right-handed systems, and we'll follow that practice throughout this book.

Figure 1.31 (a) We'll always use a right-handed coordinate system, like this one. (b) We'll never use a left-handed coordinate system (in which  $\hat{i} \times \hat{j} = -\hat{k}$ , and so on).

(a) A right-handed coordinate system



(b) A left-handed coordinate system; we will not use these.





## CHAPTER 1 SUMMARY

**Physical quantities and units:** Three fundamental physical quantities are mass, length, and time. The corresponding fundamental SI units are the kilogram, the meter, and the second. Derived units for other physical quantities are products or quotients of the basic units. Equations must be dimensionally consistent; two terms can be added only when they have the same units. (See Examples 1.1 and 1.2.)


**Significant figures:** The accuracy of a measurement can be indicated by the number of significant figures or by a stated uncertainty. The significant figures in the result of a calculation are determined by the rules summarized in Table 1.2. When only crude estimates are available for input data, we can often make useful order-of-magnitude estimates. (See Examples 1.3 and 1.4.)

Significant figures in magenta

$$\pi = \frac{C}{2r} = \frac{0.424 \text{ m}}{2(0.06750 \text{ m})} = 3.14$$


$$123.62 + 8.9 = 132.5$$

**Scalars, vectors, and vector addition:** Scalar quantities are numbers and combine according to the usual rules of arithmetic. Vector quantities have direction as well as magnitude and combine according to the rules of vector addition. The negative of a vector has the same magnitude but points in the opposite direction. (See Example 1.5.)




**Vector components and vector addition:** Vectors can be added by using components of vectors. The x-component of  $\vec{R} = \vec{A} + \vec{B}$  is the sum of the x-components of  $\vec{A}$  and  $\vec{B}$ , and likewise for the y- and z-components. (See Examples 1.6 and 1.7.)

$$\begin{aligned} R_x &= A_x + B_x \\ R_y &= A_y + B_y \\ R_z &= A_z + B_z \end{aligned} \quad (1.9)$$



**Unit vectors:** Unit vectors describe directions in space. A unit vector has a magnitude of 1, with no units. The unit vectors  $\hat{i}$ ,  $\hat{j}$ , and  $\hat{k}$ , aligned with the x-, y-, and z-axes of a rectangular coordinate system, are especially useful. (See Example 1.8.)

$$\vec{A} = A_x \hat{i} + A_y \hat{j} + A_z \hat{k} \quad (1.14)$$




**Scalar product:** The scalar product  $C = \vec{A} \cdot \vec{B}$  of two vectors  $\vec{A}$  and  $\vec{B}$  is a scalar quantity. It can be expressed in terms of the magnitudes of  $\vec{A}$  and  $\vec{B}$  and the angle  $\phi$  between the two vectors, or in terms of the components of  $\vec{A}$  and  $\vec{B}$ . The scalar product is commutative;  $\vec{A} \cdot \vec{B} = \vec{B} \cdot \vec{A}$ . The scalar product of two perpendicular vectors is zero. (See Examples 1.9 and 1.10.)

$$\vec{A} \cdot \vec{B} = AB \cos \phi = |\vec{A}| |\vec{B}| \cos \phi \quad (1.16)$$

$$\vec{A} \cdot \vec{B} = A_x B_x + A_y B_y + A_z B_z \quad (1.19)$$

Scalar product  $\vec{A} \cdot \vec{B} = AB \cos \phi$



**Vector product:** The vector product  $\vec{C} = \vec{A} \times \vec{B}$  of two vectors  $\vec{A}$  and  $\vec{B}$  is a third vector  $\vec{C}$ . The magnitude of  $\vec{A} \times \vec{B}$  depends on the magnitudes of  $\vec{A}$  and  $\vec{B}$  and the angle  $\phi$  between the two vectors. The direction of  $\vec{A} \times \vec{B}$  is perpendicular to the plane of the two vectors being multiplied, as given by the right-hand rule. The components of  $\vec{C} = \vec{A} \times \vec{B}$  can be expressed in terms of the components of  $\vec{A}$  and  $\vec{B}$ . The vector product is not commutative;  $\vec{A} \times \vec{B} = -\vec{B} \times \vec{A}$ . The vector product of two parallel or antiparallel vectors is zero. (See Example 1.11.)


$$C = AB \sin \phi \quad (1.20)$$

$$C_x = A_y B_z - A_z B_y \quad (1.25)$$

$$C_y = A_z B_x - A_x B_z$$

$$C_z = A_x B_y - A_y B_x$$

$\vec{A} \times \vec{B}$  is perpendicular to the plane of  $\vec{A}$  and  $\vec{B}$ .



(Magnitude of  $\vec{A} \times \vec{B}$ ) =  $AB \sin \phi$



## GUIDED PRACTICE

For assigned homework and other learning materials, go to Mastering Physics.

### KEY EXAMPLE VARIATION PROBLEMS

Be sure to review **EXAMPLE 1.7** (Section 1.8) before attempting these problems.

**VP1.7.1** Consider the three vectors  $\vec{A}$ ,  $\vec{B}$ , and  $\vec{C}$  in Example 1.7. If a fourth vector  $\vec{D}$  is added to  $\vec{A} + \vec{B} + \vec{C}$ , the result is zero:  $\vec{A} + \vec{B} + \vec{C} + \vec{D} = \vec{0}$ . Find the magnitude and direction of  $\vec{D}$ . State the direction of  $\vec{D}$  in terms of an angle measured counterclockwise from the positive  $x$ -axis, and state in which quadrant this angle lies.

**VP1.7.2** Consider the three vectors  $\vec{A}$ ,  $\vec{B}$ , and  $\vec{C}$  in Example 1.7. Calculate the magnitude and direction of the vector  $\vec{S} = \vec{A} - \vec{B} + \vec{C}$ . State the direction of  $\vec{S}$  in terms of an angle measured counterclockwise from the positive  $x$ -axis, and state in which quadrant this angle lies. (*Hint:* The components of  $-\vec{B}$  are just the negatives of the components of  $\vec{B}$ .)

**VP1.7.3** Consider the three vectors  $\vec{A}$ ,  $\vec{B}$ , and  $\vec{C}$  in Example 1.7. (a) Find the components of the vector  $\vec{T} = \vec{A} + \vec{B} + 2\vec{C}$ . (b) Find the magnitude and direction of  $\vec{T}$ . State the direction of  $\vec{T}$  in terms of an angle measured counterclockwise from the positive  $x$ -axis, and state in which quadrant this angle lies.

**VP1.7.4** A hiker undergoes the displacement  $\vec{A}$  shown in Example 1.7. The hiker then undergoes a second displacement such that she ends up 38.0 m from her starting point, in a direction from her starting point that is  $37.0^\circ$  west of north. Find the magnitude and direction of this second displacement. State the direction in terms of an angle measured

counterclockwise from the positive  $x$ -axis, and state in which quadrant this angle lies.

Be sure to review **EXAMPLES 1.9 and 1.10** (Section 1.10) before attempting these problems.

**VP1.10.1** Vector  $\vec{A}$  has magnitude 5.00 and is at an angle of  $36.9^\circ$  south of east. Vector  $\vec{B}$  has magnitude 6.40 and is at an angle of  $20.0^\circ$  west of north. (a) Choose the positive  $x$ -direction to the east and the positive  $y$ -direction to the north. Find the components of  $\vec{A}$  and  $\vec{B}$ . (b) Calculate the scalar product  $\vec{A} \cdot \vec{B}$ .

**VP1.10.2** Vector  $\vec{C}$  has magnitude 6.50 and is at an angle of  $55.0^\circ$  measured counterclockwise from the  $+x$ -axis toward the  $+y$ -axis. Vector  $\vec{D}$  has components  $D_x = +4.80$  and  $D_y = -8.40$ . (a) Calculate the scalar product  $\vec{C} \cdot \vec{D}$ . (b) Find the angle  $\phi$  between the vectors  $\vec{C}$  and  $\vec{D}$ .

**VP1.10.3** Vector  $\vec{A}$  has components  $A_x = -5.00$ ,  $A_y = 3.00$ , and  $A_z = 0$ . Vector  $\vec{B}$  has components  $B_x = 2.50$ ,  $B_y = 4.00$ , and  $B_z = -1.50$ . Find the angle between the two vectors.

**VP1.10.4** If a force  $\vec{F}$  acts on an object as that object moves through a displacement  $\vec{s}$ , the work done by that force equals the scalar product of  $\vec{F}$  and  $\vec{s}$ :  $W = \vec{F} \cdot \vec{s}$ . A certain object moves through displacement  $\vec{s} = (4.00 \text{ m})\hat{i} + (5.00 \text{ m})\hat{j}$ . As it moves it is acted on by force  $\vec{F}$ , which has  $x$ -component  $F_x = -12.0 \text{ N}$  (1 N = 1 newton is the SI unit of force). The work done by this force is  $26.0 \text{ N} \cdot \text{m} = 26.0 \text{ J}$  (1 J = 1 joule = 1 newton-meter is the SI unit of work). (a) Find the  $y$ -component of  $\vec{F}$ . (b) Find the angle between  $\vec{F}$  and  $\vec{s}$ .

### BRIDGING PROBLEM Vectors on the Roof

An air-conditioning unit is fastened to a roof that slopes at an angle of  $35^\circ$  above the horizontal (**Fig. 1.33**). Its weight is a force  $\vec{F}$  on the air conditioner that is directed vertically downward. In order that the unit not crush the roof tiles, the component of the unit's weight perpendicular to the roof cannot exceed 425 N. (One newton, or 1 N, is the SI unit of force.) (a) What is the maximum allowed weight of the unit? (b) If the fasteners fail, the unit slides 1.50 m along the roof before it comes to a halt against a ledge. How much work does the weight force do on the unit during its slide if the unit has the weight calculated in part (a)? The work done by a force  $\vec{F}$  on an object that undergoes a displacement  $\vec{s}$  is  $W = \vec{F} \cdot \vec{s}$ .

#### SOLUTION GUIDE


##### IDENTIFY and SET UP

- This problem involves vectors and components. What are the known quantities? Which aspect(s) of the weight vector (magnitude, direction, and/or particular components) represent the target variable for part (a)? Which aspect(s) must you know to solve part (b)?
- Make a sketch based on Fig. 1.33. Draw the  $x$ - and  $y$ -axes, choosing the positive direction for each. Your axes don't have to be horizontal and vertical, but they do have to be mutually perpendicular. Figure 1.33 shows a convenient choice of axes: The  $x$ -axis is parallel to the slope of the roof.
- Choose the equations you'll use to determine the target variables.

##### EXECUTE

- Use the relationship between the magnitude and direction of a vector and its components to solve for the target variable in

Figure 1.33 An air-conditioning unit on a slanted roof.



part (a). Be careful: Is  $35^\circ$  the correct angle to use in the equation? (*Hint:* Check your sketch.)

- Make sure your answer has the correct number of significant figures.
- Use the definition of the scalar product to solve for the target variable in part (b). Again, use the correct number of significant figures.

##### EVALUATE

- Did your answer to part (a) include a vector component whose absolute value is greater than the magnitude of the vector? Is that possible?
- There are two ways to find the scalar product of two vectors, one of which you used to solve part (b). Check your answer by repeating the calculation, using the other way. Do you get the same answer?



## PROBLEMS

•, ••, •••: Difficulty levels. **CP**: Cumulative problems incorporating material from earlier chapters. **CALC**: Problems requiring calculus. **DATA**: Problems involving real data, scientific evidence, experimental design, and/or statistical reasoning. **BIO**: Biosciences problems.

### DISCUSSION QUESTIONS

- Q1.1** How many correct experiments do we need to disprove a theory? How many do we need to prove a theory? Explain.
- Q1.2** Suppose you are asked to compute the tangent of 5.00 meters. Is this possible? Why or why not?
- Q1.3** A rather ordinary middle-aged woman is in the hospital for a routine checkup. The nurse writes “140” on the patient’s medical chart but forgets to include the units. Which of these quantities could the 140 plausibly represent: the patient’s mass in kilograms? her height in centimeters?
- Q1.4** Several countries maintain accurate copies of the platinum-iridium cylinder used as the international standard of kilogram up until May 2019. The first batch of these copies, made in 1889, has on average gained  $25 \mu\text{g}$  per century, in spite of careful cleaning. Does this apparent increase have any importance? Explain.
- Q1.5** What physical phenomena (other than a pendulum or cesium clock) could you use to define a time standard?
- Q1.6** Describe how you could measure the thickness of a sheet of paper with an ordinary ruler.
- Q1.7** The quantity  $\pi = 3.14159 \dots$  is a number with no dimensions, since it is a ratio of two lengths. Describe two or three other geometrical or physical quantities that are dimensionless.
- Q1.8** What are the units of volume? Suppose another student tells you that a cylinder of radius  $r$  and height  $h$  has volume given by  $\pi r^3 h$ . Explain why this cannot be right.
- Q1.9** Three archers each fire four arrows at a target. Joe’s four arrows hit points that are spread around in a region that goes 10 cm above, 10 cm below, 10 cm to the left, and 10 cm to the right of the center of the target. All four of Moe’s arrows hit within 1 cm of a point 20 cm from the center, and Flo’s four arrows hit within 1 cm of the center. The contest judge says that one of the archers is precise but not accurate, another archer is accurate but not precise, and the third archer is both accurate and precise. Which description applies to which archer? Explain.
- Q1.10** Is the vector  $(\hat{i} + \hat{j} + \hat{k})$  a unit vector? Is the vector  $(3.0\hat{i} - 2.0\hat{j})$  a unit vector? Justify your answers.
- Q1.11** A circular racetrack has a radius of 500 m. What is the displacement of a bicyclist when she travels around the track from the north side to the south side? When she makes one complete circle around the track? Explain.
- Q1.12** Can you find two vectors with different lengths that have a vector sum of zero? What length restrictions are required for three vectors to have a vector sum of zero? Explain.
- Q1.13** The “direction of time” is said to proceed from past to future. Does this mean that time is a vector quantity? Explain.
- Q1.14** Air traffic controllers give instructions called “vectors” to tell airline pilots in which direction they are to fly. If these are the only instructions given, is the name “vector” used correctly? Why or why not?
- Q1.15** Can you find a vector quantity that has a magnitude of zero but components that are not zero? Explain. Can the magnitude of a vector be less than the magnitude of any of its components? Explain.
- Q1.16** (a) Does it make sense to say that a vector is *negative*? Why? (b) Does it make sense to say that one vector is the negative of another? Why? Does your answer here contradict what you said in part (a)?
- Q1.17** If  $\vec{C} = \vec{A} + \vec{B}$ , what must be true about the directions and magnitudes of  $\vec{A}$  and  $\vec{B}$  if  $C = A + B$ ? What must be true about the directions and magnitudes of  $\vec{A}$  and  $\vec{B}$  if  $C = 0$ ?
- Q1.18** If  $\vec{A}$  and  $\vec{B}$  are nonzero vectors, is it possible for both  $\vec{A} \cdot \vec{B}$  and  $\vec{A} \times \vec{B}$  to be zero? Explain.

- Q1.19** What does  $\vec{A} \cdot \vec{A}$ , the scalar product of a vector with itself, give? What about  $\vec{A} \times \vec{A}$ , the vector product of a vector with itself?
- Q1.20** Let  $\vec{A}$  represent any nonzero vector. Why is  $\vec{A}/A$  a unit vector, and what is its direction? If  $\theta$  is the angle that  $\vec{A}$  makes with the  $+x$ -axis, explain why  $(\vec{A}/A) \cdot \hat{i}$  is called the *direction cosine* for that axis.
- Q1.21** Figure 1.6 shows the result of an unacceptable error in the stopping position of a train. If a train travels 890 km from Berlin to Paris and then overshoots the end of the track by 10.0 m, what is the percent error in the total distance covered? Is it correct to write the total distance covered by the train as 890,010 m? Explain.
- Q1.22** Which of the following are legitimate mathematical operations: (a)  $\vec{A} \cdot (\vec{B} - \vec{C})$ ; (b)  $(\vec{A} - \vec{B}) \times \vec{C}$ ; (c)  $\vec{A} \cdot (\vec{B} \times \vec{C})$ ; (d)  $\vec{A} \times (\vec{B} \times \vec{C})$ ; (e)  $\vec{A} \times (\vec{B} \cdot \vec{C})$ ? In each case, give the reason for your answer.
- Q1.23** Consider the vector products  $\vec{A} \times (\vec{B} \times \vec{C})$  and  $(\vec{A} \times \vec{B}) \times \vec{C}$ . Give an example that illustrates the general rule that these two vector products do not have the same magnitude or direction. Can you choose vectors  $\vec{A}$ ,  $\vec{B}$ , and  $\vec{C}$  such that these two vector products are equal? If so, give an example.
- Q1.24** Show that, no matter what  $\vec{A}$  and  $\vec{B}$  are,  $\vec{A} \cdot (\vec{A} \times \vec{B}) = 0$ . (*Hint*: Do not look for an elaborate mathematical proof. Consider the definition of the direction of the cross product.)
- Q1.25** (a) If  $\vec{A} \cdot \vec{B} = 0$ , does it necessarily follow that  $A = 0$  or  $B = 0$ ? Explain. (b) If  $\vec{A} \times \vec{B} = \mathbf{0}$ , does it necessarily follow that  $A = 0$  or  $B = 0$ ? Explain.
- Q1.26** If  $\vec{A} = \mathbf{0}$  for a vector in the  $xy$ -plane, does it follow that  $A_x = -A_y$ ? What *can* you say about  $A_x$  and  $A_y$ ?

### EXERCISES

#### Section 1.3 Standards and Units

#### Section 1.4 Using and Converting Units

- 1.1** • How many years older will you be 1.00 gigasecond from now? (Assume a 365-day year.)
- 1.2** •• You read in a brochure that Kensington Gardens, one of London’s eight Royal Parks, covers an area of 265 acres. An *acre* is a British unit widely used in land measurement in the UK (1 acre =  $43,560 \text{ ft}^2$  and  $1 \text{ ft} = 0.3048 \text{ m}$ , see Appendix C). What is the area of Kensington Gardens in square meters? in square kilometers? in hectares (a *hectare* is a unit of area equal to  $10,000 \text{ m}^2$  used in land measurement)?
- 1.3** •• How many nanoseconds does it take light to travel 0.3 m in vacuum?
- 1.4** •• The density of silver is  $10.5 \text{ g/cm}^3$ . What is this value in kilograms per cubic meter?
- 1.5** • In the ancient Roman Empire, large distances were measured in miliarum. A miliarum was subdivided into 8 stadia, 1 stadium into 125 passus, 1 passus into 5 pes, 1 pes into 4 palmus, 1 palmus into 4 digitus. Knowing that 1 pes = 0.296 m, find the number of (a) meters in 1.00 miliarum and (b) centimeters in 1.00 digitus.
- 1.6** • The speed limits in Ireland were changed from imperial (miles per hour, mi/h) to metric (kilometers per hour, km/h) on 20 January 2005. Use  $1 \text{ mi} = 5280 \text{ ft}$  and  $1 \text{ ft} = 30.48 \text{ cm}$  to: (a) convert the former 30 mi/h speed limit for build-up areas to units of km/h and compare this result with the new 50 km/h speed limit; (b) convert the new 120 km/h speed limit for motorways to units of mi/h and compare this result with the old 70 mi/h speed limit.

**1.7 •** Fuel consumption of a car is the amount of fuel used per unit distance. It is customary to give fuel consumption in liters per 100 km (L/100 km). For example, the 2019 Austin Mini Cooper has a fuel consumption of 5.5 L/100 km, that is, it uses 5.5 liters of petrol per every 100 km driven. (a) If this car's petrol tank holds 40 L, how many tanks of petrol will you use to drive 1200 km? (b) You read in an English car magazine that the classic 1964 Austin Mini Cooper has an average estimated "mileage of 30.5 miles per gallon" (where 1 mile = 1.609 km is a British unit of distance and 1 gallon (UK) = 4.546 L is a British unit of capacity, see Appendix C). Find the fuel consumption of this car and compare it with the 2019 model.

**1.8 • BIO** (a) The recommended daily allowance (RDA) of the trace metal magnesium is 410 mg/day for males. Express this quantity in  $\mu\text{g}/\text{day}$ . (b) For adults, the RDA of the amino acid lysine is 12 mg per kg of body weight. How many grams per day should a 77-kg adult receive? (c) A typical multivitamin tablet can contain 2.0 mg of vitamin B<sub>2</sub> (riboflavin), and the RDA is 0.0030 g/day. How many such tablets should a person take each day to get the proper amount of this vitamin, if he gets none from other sources? (d) The RDA for the trace element selenium is 0.000070 g/day. Express this dose in mg/day.

**1.9 •• Neptunium.** In the fall of 2002, scientists at Los Alamos National Laboratory determined that the critical mass of neptunium-237 is about 60 kg. The critical mass of a fissionable material is the minimum amount that must be brought together to start a nuclear chain reaction. Neptunium-237 has a density of 19.5 g/cm<sup>3</sup>. What would be the radius of a sphere of this material that has a critical mass?

**1.10 •• BIO Bacteria.** Bacteria vary in size, but a diameter of 2.0  $\mu\text{m}$  is not unusual. What are the volume (in cubic centimeters) and surface area (in square millimeters) of a spherical bacterium of that size? (Consult Appendix D for relevant formulas.)

### Section 1.5 Uncertainty and Significant Figures

**1.11 •** With a wooden ruler, you measure the length of a rectangular piece of sheet metal to be 12 mm. With micrometer calipers, you measure the width of the rectangle to be 5.98 mm. Use the correct number of significant figures: What are (a) the area of the rectangle; (b) the ratio of the rectangle's width to its length; (c) the perimeter of the rectangle; (d) the difference between the length and the width; and (e) the ratio of the length to the width?

**1.12 •** The volume of a solid cylinder is given by  $V = \pi r^2 h$ , where  $r$  is the radius and  $h$  is the height. You measure the radius and height of a thin cylindrical wire and obtain the results  $r = 0.036$  cm and  $h = 12.1$  cm. What do your measurements give for the volume of the wire in mm<sup>3</sup>? Use the correct number of significant figures in your answer.

**1.13 ••** A useful and easy-to-remember approximate value for the number of seconds in a year is  $\pi \times 10^7$ . Determine the percent error in this approximate value. (There are 365.24 days in one year.)

**1.14 •** Express each approximation of  $\pi$  to six significant figures: (a) 22/7 and (b) 355/113. (c) Are these approximations accurate to that precision?

### Section 1.6 Estimates and Orders of Magnitude

**1.15 • BIO** Which of the values given below are plausible for an average adult male giraffe: (a) height of 2 m or 5 m? (b) mass of 1500 kg or 5000 kg? (c) maximal speed of 15 m/s or 45 m/s?

**1.16 •** How many liters of petrol are used in Italy in one day? Assume that there are two cars for every three people, that each car is driven an average of 10,000 kilometers per year, and that the petrol consumption of an average car is 8 liters per 100 kilometers. Assume that the population of Italy is approximately 60 million.

**1.17 •** In Wagner's opera *Das Rheingold*, the goddess Freia is ransomed for a pile of gold just tall enough and wide enough to hide her

from sight. Estimate the monetary value of this pile. The density of gold is 19.3 g/cm<sup>3</sup>, and take its value to be about \$40 per gram.

**1.18 • BIO** Four astronauts are in a spherical space station. (a) If, as is typical, each of them breathes about 500 cm<sup>3</sup> of air with each breath, approximately what volume of air (in cubic meters) do these astronauts breathe in a year? (b) What would the diameter (in meters) of the space station have to be to contain all this air?


**1.19 •** You are using water to dilute small amounts of chemicals in the laboratory, drop by drop. How many drops of water are in a 1.0 L bottle? (*Hint:* Start by estimating the diameter of a drop of water.)

**1.20 • BIO** How many times does a human heart beat during a person's lifetime? How many liters of blood does it pump? (Estimate that the heart pumps 50 cm<sup>3</sup> of blood with each beat and assume a 365-day year.)

### Section 1.7 Vectors and Vector Addition

**1.21 ••** A postal employee drives a delivery truck along the route shown in Fig. E1.21. Determine the magnitude and direction of the resultant displacement by drawing a scale diagram. (See also Exercise 1.28 for a different approach.)


Figure E1.21

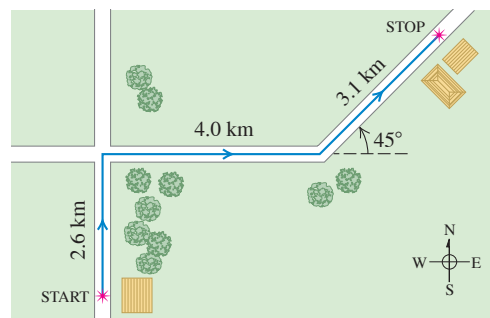

**1.22 ••** For the vectors  $\vec{A}$  and  $\vec{B}$  in Fig. E1.22, use a scale drawing to find the magnitude and direction of (a) the vector sum  $\vec{A} + \vec{B}$  and (b) the vector difference  $\vec{A} - \vec{B}$ . Use your answers to find the magnitude and direction of (c)  $-\vec{A} - \vec{B}$  and (d)  $\vec{B} - \vec{A}$ . (See also Exercise 1.29 for a different approach.)

**1.23 ••** A spelunker is surveying a cave. She follows a passage 180 m straight west, then 210 m in a direction 45° east of south, and then 280 m at 30° east of north. After a fourth displacement, she finds herself back where she started. Use a scale drawing to determine the magnitude and direction of the fourth displacement. (See also Problem 1.57 for a different approach.)

Figure E1.22

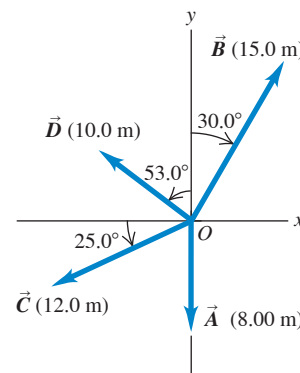

### Section 1.8 Components of Vectors

**1.24 ••** Let  $\theta$  be the angle that the vector  $\vec{A}$  makes with the  $+x$ -axis, measured counterclockwise from that axis. Find angle  $\theta$  for a vector that has these components: (a)  $A_x = 2.00$  m,  $A_y = -1.00$  m; (b)  $A_x = 2.00$  m,  $A_y = 1.00$  m; (c)  $A_x = -2.00$  m,  $A_y = 1.00$  m; (d)  $A_x = -2.00$  m,  $A_y = -1.00$  m.

**1.25 •** Compute the  $x$ - and  $y$ -components of the vectors  $\vec{A}$ ,  $\vec{B}$ ,  $\vec{C}$ , and  $\vec{D}$  in Fig. E1.22.

**1.26** • Vector  $\vec{A}$  is in the direction  $40.0^\circ$  clockwise from the  $-y$ -axis. The  $x$ -component of  $\vec{A}$  is  $A_x = -20.0$  m. (a) What is the  $y$ -component of  $\vec{A}$ ? (b) What is the magnitude of  $\vec{A}$ ?

**1.27** • Vector  $\vec{A}$  has  $y$ -component  $A_y = +13.0$  m.  $\vec{A}$  makes an angle of  $32.0^\circ$  counterclockwise from the  $+y$ -axis. (a) What is the  $x$ -component of  $\vec{A}$ ? (b) What is the magnitude of  $\vec{A}$ ?

**1.28** •• A postal employee drives a delivery truck over the route shown in Fig. E1.21. Use the method of components to determine the magnitude and direction of her resultant displacement. In a vector-addition diagram (roughly to scale), show that the resultant displacement found from your diagram is in qualitative agreement with the result you obtained by using the method of components.

**1.29** • For the vectors  $\vec{A}$  and  $\vec{B}$  in Fig. E1.22, use the method of components to find the magnitude and direction of (a) the vector sum  $\vec{A} + \vec{B}$ ; (b) the vector sum  $\vec{B} + \vec{A}$ ; (c) the vector difference  $\vec{A} - \vec{B}$ ; (d) the vector difference  $\vec{B} - \vec{A}$ .


**1.30** • Find the magnitude and direction of the vector represented by the following pairs of components: (a)  $A_x = -8.60$  cm,  $A_y = 5.20$  cm; (b)  $A_x = -9.70$  m,  $A_y = -2.45$  m; (c)  $A_x = 7.75$  km,  $A_y = -2.70$  km.

**1.31** •• A disoriented physics professor drives 3.25 km north, then 2.20 km west, and then 1.50 km south. Find the magnitude and direction of the resultant displacement, using the method of components. In a vector-addition diagram (roughly to scale), show that the resultant displacement found from your diagram is in qualitative agreement with the result you obtained by using the method of components.

**1.32** •• Vector  $\vec{A}$  has magnitude 8.00 m and is in the  $xy$ -plane at an angle of  $127^\circ$  counterclockwise from the  $+x$ -axis ( $37^\circ$  past the  $+y$ -axis). What are the magnitude and direction of vector  $\vec{B}$  if the sum  $\vec{A} + \vec{B}$  is in the  $-y$ -direction and has magnitude 12.0 m?

**1.33** •• Vector  $\vec{A}$  is 2.80 cm long and is  $60.0^\circ$  above the  $x$ -axis in the first quadrant. Vector  $\vec{B}$  is 1.90 cm long and is  $60.0^\circ$  below the  $x$ -axis in the fourth quadrant (Fig. E1.33). Use components to find the magnitude and direction of (a)  $\vec{A} + \vec{B}$ ; (b)  $\vec{A} - \vec{B}$ ; (c)  $\vec{B} - \vec{A}$ . In each case, sketch the vector addition or subtraction and show that your numerical answers are in qualitative agreement with your sketch.

Figure E1.33



### Section 1.9 Unit Vectors

**1.34** • In each case, find the  $x$ - and  $y$ -components of vector  $\vec{A}$ : (a)  $\vec{A} = 3.20\hat{i} - 6.50\hat{j}$ ; (b)  $\vec{A} = 18.2\hat{j} - 7.91\hat{i}$ ; (c)  $\vec{A} = -12.0\hat{i} + 21.2\hat{j}$ ; (d)  $\vec{A} = 5.0\vec{B}$ , where  $\vec{B} = 8\hat{i} - 4\hat{j}$ .

**1.35** •• Write each vector in Fig. E1.22 in terms of the unit vectors  $\hat{i}$  and  $\hat{j}$ .

**1.36** •• Given two vectors  $\vec{A} = 4.00\hat{i} + 7.00\hat{j}$  and  $\vec{B} = 5.00\hat{i} - 2.00\hat{j}$ , (a) find the magnitude of each vector; (b) use unit vectors to write an expression for the vector difference  $\vec{A} - \vec{B}$ ; and (c) find the magnitude and direction of the vector difference  $\vec{A} - \vec{B}$ . (d) In a vector diagram show  $\vec{A}$ ,  $\vec{B}$ , and  $\vec{A} - \vec{B}$ , and show that your diagram agrees qualitatively with your answer to part (c).


**1.37** •• (a) Write each vector in Fig. E1.37 in terms of the unit vectors  $\hat{i}$  and  $\hat{j}$ . (b) Use unit vectors to express vector  $\vec{C}$ , where  $\vec{C} = 3.00\vec{A} - 4.00\vec{B}$ . (c) Find the magnitude and direction of  $\vec{C}$ .

**1.38** • You are given two vectors  $\vec{A} = -3.00\hat{i} + 6.00\hat{j}$  and  $\vec{B} = 7.00\hat{i} + 2.00\hat{j}$ . Let counterclockwise angles be positive.

(a) What angle does  $\vec{A}$  make with the  $+x$ -axis? (b) What angle does  $\vec{B}$  make with the  $+x$ -axis? (c) Vector  $\vec{C}$  is the sum of  $\vec{A}$  and  $\vec{B}$ , so  $\vec{C} = \vec{A} + \vec{B}$ . What angle does  $\vec{C}$  make with the  $+x$ -axis?

**1.39** • Given two vectors  $\vec{A} = -2.00\hat{i} + 3.00\hat{j} + 4.00\hat{k}$  and  $\vec{B} = 3.00\hat{i} + 1.00\hat{j} - 3.00\hat{k}$ , (a) find the magnitude of each vector; (b) use unit vectors to write an expression for the vector difference  $\vec{A} - \vec{B}$ ; and (c) find the magnitude of the vector difference  $\vec{A} - \vec{B}$ . Is this the same as the magnitude of  $\vec{B} - \vec{A}$ ? Explain.

Figure E1.37



### Section 1.10 Products of Vectors

**1.40** •• (a) Find the scalar product of the vectors  $\vec{A}$  and  $\vec{B}$  given in Exercise 1.36. (b) Find the angle between these two vectors.

**1.41** • For the vectors  $\vec{A}$ ,  $\vec{B}$ , and  $\vec{C}$  in Fig. E1.22, find the scalar products (a)  $\vec{A} \cdot \vec{B}$ ; (b)  $\vec{B} \cdot \vec{C}$ ; (c)  $\vec{A} \cdot \vec{C}$ .

**1.42** •• Find the vector product  $\vec{A} \times \vec{B}$  (expressed in unit vectors) of the two vectors given in Exercise 1.36. What is the magnitude of the vector product?

**1.43** •• Find the angle between each of these pairs of vectors:

(a)  $\vec{A} = -2.00\hat{i} + 6.00\hat{j}$  and  $\vec{B} = 2.00\hat{i} - 3.00\hat{j}$

(b)  $\vec{A} = 3.00\hat{i} + 5.00\hat{j}$  and  $\vec{B} = 10.00\hat{i} + 6.00\hat{j}$

(c)  $\vec{A} = -4.00\hat{i} + 2.00\hat{j}$  and  $\vec{B} = 7.00\hat{i} + 14.00\hat{j}$

**1.44** • For the two vectors in Fig. E1.33, find the magnitude and direction of (a) the vector product  $\vec{A} \times \vec{B}$ ; (b) the vector product  $\vec{B} \times \vec{A}$ .

**1.45** • For the two vectors  $\vec{A}$  and  $\vec{D}$  in Fig. E1.22, find the magnitude and direction of (a) the vector product  $\vec{A} \times \vec{D}$ ; (b) the vector product  $\vec{D} \times \vec{A}$ .

**1.46** • For the two vectors  $\vec{A}$  and  $\vec{B}$  in Fig. E1.37, find (a) the scalar product  $\vec{A} \cdot \vec{B}$ ; (b) the magnitude and direction of the vector product  $\vec{A} \times \vec{B}$ .

**1.47** •• The vector product of vectors  $\vec{A}$  and  $\vec{B}$  has magnitude  $16.0$  m<sup>2</sup> and is in the  $+z$ -direction. If vector  $\vec{A}$  has magnitude 8.0 m and is in the  $-x$ -direction, what are the magnitude and direction of vector  $\vec{B}$  if it has no  $x$ -component?

**1.48** • The angle between two vectors is  $\theta$ . (a) If  $\theta = 30.0^\circ$ , which has the greater magnitude: the scalar product or the vector product of the two vectors? (b) For what value (or values) of  $\theta$  are the magnitudes of the scalar product and the vector product equal?

## PROBLEMS

**1.49** •• **White Dwarfs and Neutron Stars.** Recall that density is mass divided by volume, and consult Appendix D as needed. (a) Calculate the average density of the earth in g/cm<sup>3</sup>, assuming our planet is a perfect sphere. (b) In about 5 billion years, at the end of its lifetime, our sun will end up as a white dwarf that has about the same mass as it does now but is reduced to about 15,000 km in diameter. What will be its density at that stage? (c) A neutron star is the remnant of certain supernovae (explosions of giant stars). Typically, neutron stars are about 20 km in diameter and have about the same mass as our sun. What is a typical neutron star density in g/cm<sup>3</sup>?

**1.50 •• The Hydrogen Maser.** A maser is a laser-type device that produces electromagnetic waves with frequencies in the microwave and radio-wave bands of the electromagnetic spectrum. You can use the radio waves generated by a hydrogen maser as a standard of frequency. The frequency of these waves is 1,420,405,751.786 hertz. (A hertz is another name for one cycle per second.) A clock controlled by a hydrogen maser is off by only 1 s in 100,000 years. For the following questions, use only three significant figures. (The large number of significant figures given for the frequency simply illustrates the remarkable accuracy to which it has been measured.) (a) What is the time for one cycle of the radio wave? (b) How many cycles occur in 1 h? (c) How many cycles would have occurred during the age of the earth, which is estimated to be  $4.6 \times 10^9$  years? (d) By how many seconds would a hydrogen maser clock be off after a time interval equal to the age of the earth?

**1.51 •• An Earthlike Planet.** In January 2006 astronomers reported the discovery of a planet, comparable in size to the earth, orbiting another star and having a mass about 5.5 times the earth's mass. It is believed to consist of a mixture of rock and ice, similar to Neptune. If this planet has the same density as Neptune ( $1.76 \text{ g/cm}^3$ ), what is its radius expressed (a) in kilometers and (b) as a multiple of earth's radius? Consult the back of the book for astronomical data.

**1.52 ••• A rectangular piece of aluminum** is  $7.60 \pm 0.01 \text{ cm}$  long and  $1.50 \pm 0.01 \text{ cm}$  wide. (a) Find the area of the rectangle and the uncertainty in the area. (b) Verify that the fractional uncertainty in the area is equal to the sum of the fractional uncertainties in the length and in the width. (This is a general result.)


**1.53 • BIO** Estimate the number of atoms in your body. (*Hint:* Based on what you know about biology and chemistry, what are the most common types of atom in your body? What is the mass of each type of atom? Appendix F gives the atomic masses of different elements, measured in atomic mass units; you can find the value of an atomic mass unit, or 1 u, in Appendix B.)

**1.54 • BIO** Biological tissues are typically made up of 98% water. Given that the density of water is  $1.0 \times 10^3 \text{ kg/m}^3$ , estimate the mass of (a) the heart of an adult human; (b) a cell with a diameter of  $0.5 \text{ }\mu\text{m}$ ; (c) a honeybee.

**1.55 ••** Vector  $\vec{A} = 3.0\hat{i} - 4.0\hat{k}$ . (a) Construct a unit vector that is parallel to  $\vec{A}$ . (b) Construct a unit vector that is antiparallel to  $\vec{A}$ . (c) Construct two unit vectors that are perpendicular to  $\vec{A}$  and that have no  $y$ -component.

**1.56 ••** Three horizontal ropes pull on a large stone stuck in the ground, producing the vector forces  $\vec{A}$ ,  $\vec{B}$ , and  $\vec{C}$  shown in **Fig. P1.56**. Find the magnitude and direction of a fourth force on the stone that will make the vector sum of the four forces zero.

Figure P1.56




**1.57 •••** As noted in Exercise 1.23, a spelunker is surveying a cave. She follows a passage 177 m straight west, then 215 m in a direction  $45^\circ$  east of south, and then 271 m at  $30^\circ$  east of north. After a fourth displacement, she finds herself back where she started. Use the method of components to determine the magnitude and direction of the fourth displacement. Draw the vector-addition diagram and show that it is in qualitative agreement with your numerical solution.

**1.58 ••• Emergency Landing.** A plane leaves the airport in Galisteo and flies 145 km at  $68.0^\circ$  east of north; then it changes direction to fly 250 km at  $48.0^\circ$  south of east, after which it makes an immediate emergency landing in a pasture. When the airport sends out a rescue crew, in which direction and how far should this crew fly to go directly to this plane?

**1.59 ••** A charged object with electric charge  $q$  produces an electric field. The SI unit for electric field is N/C, where N is the SI unit for force and C is the SI unit for charge. If at point  $P$  there are electric fields from two or more charged objects, then the resultant field is the vector sum of the fields from each object. At point  $P$  the electric field  $\vec{E}_1$  from charge  $q_1$  is 450 N/C in the  $+y$ -direction, and the electric field  $\vec{E}_2$  from charge  $q_2$  is 600 N/C in the direction  $36.9^\circ$  from the  $-y$ -axis toward the  $-x$ -axis. What are the magnitude and direction of the resultant field  $\vec{E} = \vec{E}_1 + \vec{E}_2$  at point  $P$  due to these two charges?


**1.60 ••** A sailor in a small sailboat encounters shifting winds. She sails 2.00 km east, next 3.50 km southeast, and then an additional distance in an unknown direction. Her final position is 5.80 km directly east of the starting point (**Fig. P1.60**). Find the magnitude and direction of the third leg of the journey. Draw the vector-addition diagram and show that it is in qualitative agreement with your numerical solution.

Figure P1.60

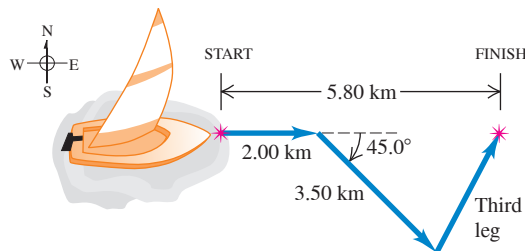


**1.61 ••• BIO Dislocated Shoulder.** A patient with a dislocated shoulder is put into a traction apparatus as shown in **Fig. P1.61**. The pulls  $\vec{A}$  and  $\vec{B}$  have equal magnitudes and must combine to produce an outward traction force of 5.52 N on the patient's arm. How large should these pulls be?

Figure P1.61

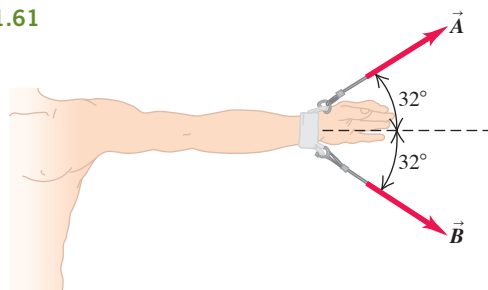

**1.62 •••** On a training flight in Switzerland, a student pilot flies from Bern to Zurich, next to Lugano, and then to Sion (**Fig. P1.62**). The directions are shown relative to north:  $0^\circ$  is north,  $90^\circ$  is east,  $180^\circ$  is south, and  $270^\circ$  is west. Use the method of components to find (a) the distance she has to fly from Sion to get back to Bern, and (b) the direction (relative to north) she must fly to get there. Illustrate your solutions with a vector diagram.

Figure P1.62



**1.63** •• You leave the airport in Wagga Wagga and fly 23.0 km in a direction  $34.0^\circ$  south of east. You then fly 46.0 km due north. How far and in what direction must you then fly to reach a private landing strip that is 32.0 km due west of the Wagga Wagga airport?

**1.64** ••• **Getting Back.** An explorer in Antarctica leaves his shelter during a whiteout. He takes 43 steps northeast, next 80 steps at  $60^\circ$  north of west, and then 52 steps due south. Assume all of his steps are equal in length. (a) Sketch, roughly to scale, the three vectors and their resultant. (b) Save the explorer from becoming hopelessly lost by giving him the displacement, calculated by using the method of components, that will return him to his shelter.

**1.65** •• As a test of orienteering skills, your physics class holds a contest in a large, open field. Each contestant is told to travel 20.8 m due north from the starting point, then 38.0 m due east, and finally 18.0 m in the direction  $33.0^\circ$  west of south. After the specified displacements, a contestant will find a silver coin hidden under a rock. The winner is the person who takes the shortest time to reach the location of the silver coin. Remembering what you learned in class, you run on a straight line from the starting point to the hidden coin. How far and in what direction do you run?

**1.66** • You are standing on a street corner with your friend. You then travel 14.0 m due west across the street and into your apartment building. You travel in the lift 22.0 m upward to your floor, walk 12.0 m north to the door of your apartment, and then walk 6.0 m due east to your balcony that overlooks the street. Your friend is standing where you left her. Now how far are you from your friend?

**1.67** •• You are lost at night in a large, open field. Your GPS tells you that you are 122.0 m from your car, in a direction  $58.0^\circ$  east of south. You walk 72.0 m due west along a ditch. How much farther, and in what direction, must you walk to reach your car?

**1.68** ••• You live in a town where the streets are straight but are in a variety of directions. On Saturday you go from your apartment to the grocery store by driving 0.60 km due north and then 1.40 km in the direction  $60.0^\circ$  west of north. On Sunday you again travel from your apartment to the same store but this time by driving 0.80 km in the direction  $50.0^\circ$  north of west and then in a straight line to the store. (a) How far is the store from your apartment? (b) On which day do you travel the greater distance, and how much farther do you travel? Or, do you travel the same distance on each route to the store?

**1.69** •• While following a treasure map, you start at an old oak tree. You first walk 825 m directly south, then turn and walk 1.25 km at  $30.0^\circ$  west of north, and finally walk 1.00 km at  $32.0^\circ$  north of east, where you find the treasure: a biography of Isaac Newton! (a) To return to the old oak tree, in what direction should you head and how far will you walk? Use components to solve this problem. (b) To see whether your calculation in part (a) is reasonable, compare it with a graphical solution drawn roughly to scale.

**1.70** •• A fence post is 59.0 m from where you are standing, in a direction  $38.0^\circ$  north of east. A second fence post is due south from you. How far are you from the second post if the distance between the two posts is 70.0 m?

**1.71** •• A dog in an open field runs 12.0 m east and then 28.0 m in a direction  $50.0^\circ$  west of north. In what direction and how far must the dog then run to end up 10.0 m south of her original starting point?

**1.72** ••• Ricardo and Jane are standing under a tree in the middle of a pasture. An argument ensues, and they walk away in different directions. Ricardo walks 30.0 m in a direction  $60.0^\circ$  west of north. Jane walks 15.0 m in a direction  $30.0^\circ$  south of west. They then stop and turn to face each other. (a) What is the distance between them? (b) In what direction should Ricardo walk to go directly toward Jane?

**1.73** ••• You are camping with Joe and Karl. Since all three of you like your privacy, you don't pitch your tents close together. Joe's tent is 21.0 m from yours, in the direction  $23.0^\circ$  south of east. Karl's tent is 32.0 m from yours, in the direction  $37.0^\circ$  north of east. What is the distance between Karl's tent and Joe's tent?

**1.74** •• **Bond Angle in Methane.** In the methane molecule,  $\text{CH}_4$ , each hydrogen atom is at a corner of a regular tetrahedron with the carbon atom at the center. In coordinates for which one of the C—H bonds is in the direction of  $\hat{i} + \hat{j} + \hat{k}$ , an adjacent C—H bond is in the  $\hat{i} - \hat{j} - \hat{k}$  direction. Calculate the angle between these two bonds.

**1.75** •• The work  $W$  done by a constant force  $\vec{F}$  on an object that undergoes displacement  $\vec{s}$  from point 1 to point 2 is  $W = \vec{F} \cdot \vec{s}$ . For  $F$  in newtons (N) and  $s$  in meters (m),  $W$  is in joules (J). If, during a displacement of the object,  $\vec{F}$  has constant direction  $60.0^\circ$  above the  $-x$ -axis and constant magnitude 5.00 N and if the displacement is 0.800 m in the  $+x$ -direction, what is the work done by the force  $\vec{F}$ ?

**1.76** •• Magnetic fields are produced by moving charges and exert forces on moving charges. When a particle with charge  $q$  is moving with velocity  $\vec{v}$  in a magnetic field  $\vec{B}$ , the force  $\vec{F}$  that the field exerts on the particle is given by  $\vec{F} = q\vec{v} \times \vec{B}$ . The SI units are as follows: For charge it is the coulomb (C), for magnetic field it is tesla (T), for force it is newton (N), and for velocity it is m/s. If  $q = -8.00 \times 10^{-6}$  C,  $\vec{v}$  is  $3.00 \times 10^4$  m/s in the  $+x$ -direction, and  $\vec{B}$  is 5.00 T in the  $-y$ -direction, what are the magnitude and direction of the force that the magnetic field exerts on the charged particle?

**1.77** •• Vectors  $\vec{A}$  and  $\vec{B}$  have scalar product  $-7.00$ , and their vector product has magnitude  $+9.00$ . What is the angle between these two vectors?

**1.78** •• Torque is a vector quantity that specifies the effectiveness of a force in causing the rotation of an object. The torque that a force  $\vec{F}$  exerts on a rigid object depends on the point where the force acts and on the location of the axis of rotation. If  $\vec{r}$  is the length vector from the axis to the point of application of the force, then the torque is  $\vec{r} \times \vec{F}$ . If  $\vec{F}$  is 22.0 N in the  $-y$ -direction and if  $\vec{r}$  is in the  $xy$ -plane at an angle of  $36^\circ$  from the  $+y$ -axis toward the  $-x$ -axis and has magnitude 4.0 m, what are the magnitude and direction of the torque exerted by  $\vec{F}$ ?

**1.79** •• Vector  $\vec{A} = a\hat{i} - b\hat{k}$  and vector  $\vec{B} = -c\hat{j} + d\hat{k}$ . (a) In terms of the positive scalar quantities  $a$ ,  $b$ ,  $c$ , and  $d$ , what are  $\vec{A} \cdot \vec{B}$  and  $\vec{A} \times \vec{B}$ ? (b) If  $c = 0$ , what is the magnitude of  $\vec{A} \cdot \vec{B}$  and what are the magnitude and direction of  $\vec{A} \times \vec{B}$ ? Does your result for the direction for  $\vec{A} \times \vec{B}$  agree with the result you get if you sketch  $\vec{A}$  and  $\vec{B}$  in the  $xz$ -plane and apply the right-hand rule? The scalar product can be described as the magnitude of  $\vec{B}$  times the component of  $\vec{A}$  that is parallel to  $\vec{B}$ . Does this agree with your result? The magnitude of the vector product can be described as the magnitude of  $\vec{B}$  times the component of  $\vec{A}$  that is perpendicular to  $\vec{B}$ . Does this agree with your result?

**1.80** •• Vectors  $\vec{A}$  and  $\vec{B}$  are in the  $xy$ -plane. Vector  $\vec{A}$  is in the  $+x$ -direction, and the direction of vector  $\vec{B}$  is at an angle  $\theta$  from the  $+x$ -axis measured toward the  $+y$ -axis. (a) If  $\theta$  is in the range  $0^\circ \leq \theta \leq 180^\circ$ , for what two values of  $\theta$  does the scalar product  $\vec{A} \cdot \vec{B}$  have its maximum magnitude? For each of these values of  $\theta$ , what is the magnitude of the vector product  $\vec{A} \times \vec{B}$ ? (b) If  $\theta$  is in the range  $0^\circ \leq \theta \leq 180^\circ$ , for what value of  $\theta$  does the vector product  $\vec{A} \times \vec{B}$  have its maximum value? For this value of  $\theta$ , what is the magnitude of the scalar product  $\vec{A} \cdot \vec{B}$ ? (c) What is the angle  $\theta$  in the range  $0^\circ \leq \theta \leq 180^\circ$  for which  $\vec{A} \cdot \vec{B}$  is twice  $|\vec{A} \times \vec{B}|$ ?

**1.81** •• Vector  $\vec{A}$  has magnitude 12.0 m, and vector  $\vec{B}$  has magnitude 12.0 m. The scalar product  $\vec{A} \cdot \vec{B}$  is 76.0  $\text{m}^2$ . What is the magnitude of the vector product between these two vectors?

**1.82 ••** Vector  $\vec{A}$  has magnitude 5.00 m and lies in the  $xy$ -plane in a direction  $53.0^\circ$  from the  $+x$ -axis axis measured toward the  $+y$ -axis. Vector  $\vec{B}$  has magnitude 8.00 m and a direction you can adjust. (a) You want the vector product  $\vec{A} \times \vec{B}$  to have a positive  $z$ -component of the largest possible magnitude. What direction should you select for vector  $\vec{B}$ ? (b) What is the direction of  $\vec{B}$  for which  $\vec{A} \times \vec{B}$  has the most negative  $z$ -component? (c) What are the two directions of  $\vec{B}$  for which  $\vec{A} \times \vec{B}$  is zero?

**1.83 ••** The scalar product of vectors  $\vec{A}$  and  $\vec{B}$  is  $+59.0 \text{ m}^2$ . Vector  $\vec{A}$  has magnitude 9.00 m and direction  $28.0^\circ$  west of south. If vector  $\vec{B}$  has direction  $39.0^\circ$  south of east, what is the magnitude of  $\vec{B}$ ?

**1.84 •••** Obtain a *unit vector* perpendicular to the two vectors given in Exercise 1.39.

**1.85 ••** You are given vectors  $\vec{A} = 5.0\hat{i} - 6.5\hat{j}$  and  $\vec{B} = 3.5\hat{i} - 7.0\hat{j}$ . A third vector,  $\vec{C}$ , lies in the  $xy$ -plane. Vector  $\vec{C}$  is perpendicular to vector  $\vec{A}$ , and the scalar product of  $\vec{C}$  with  $\vec{B}$  is 15.0. From this information, find the components of vector  $\vec{C}$ .

**1.86 ••** Two vectors  $\vec{A}$  and  $\vec{B}$  have magnitudes  $A = 3.00$  and  $B = 3.00$ . Their vector product is  $\vec{A} \times \vec{B} = -5.00\hat{k} + 2.00\hat{i}$ . What is the angle between  $\vec{A}$  and  $\vec{B}$ ?

**1.87 ••• DATA** You are a team leader at a pharmaceutical company. Several technicians are preparing samples, and you want to compare the densities of the samples (density = mass/volume) by using the mass and volume values they have reported. Unfortunately, you did not specify what units to use. The technicians used a variety of units in reporting their values, as shown in the following table.

Sample ID	Mass	Volume
A	8.00 g	$1.67 \times 10^{-6} \text{ m}^3$
B	$6.00 \mu\text{g}$	$9.38 \times 10^6 \mu\text{m}^3$
C	8.00 mg	$2.50 \times 10^{-3} \text{ cm}^3$
D	$9.00 \times 10^{-4} \text{ kg}$	$2.81 \times 10^3 \text{ mm}^3$
E	$9.00 \times 10^4 \text{ ng}$	$1.59 \times 10^{-2} \text{ mm}^3$
F	$6.00 \times 10^{-2} \text{ mg}$	$1.25 \times 10^{-4} \text{ cm}^3$

List the sample IDs in order of increasing density of the sample.

**1.88 ••• DATA** You are a mechanical engineer working for a manufacturing company. Two forces,  $\vec{F}_1$  and  $\vec{F}_2$ , act on a component part of a piece of equipment. Your boss asked you to find the magnitude of the larger of these two forces. You can vary the angle between  $\vec{F}_1$  and  $\vec{F}_2$  from  $0^\circ$  to  $90^\circ$  while the magnitude of each force stays constant. And, you can measure the magnitude of the resultant force they produce (their vector sum), but you cannot directly measure the magnitude of each separate force. You measure the magnitude of the resultant force for four angles  $\theta$  between the directions of the two forces as follows:

$\theta$	Resultant force (N)
$0.0^\circ$	8.00
$45.0^\circ$	7.43
$60.0^\circ$	7.00
$90.0^\circ$	5.83

(a) What is the magnitude of the larger of the two forces? (b) When the equipment is used on the production line, the angle between the two forces is  $30.0^\circ$ . What is the magnitude of the resultant force in this case?

**1.89 ••• DATA Navigating in the Solar System.** The *Mars Polar Lander* spacecraft was launched on January 3, 1999. On December 3, 1999, the day *Mars Polar Lander* impacted the Martian surface at high velocity and probably disintegrated, the positions of the earth and Mars were given by these coordinates:

	$x$	$y$	$z$
Earth	0.3182 AU	0.9329 AU	-0.0000 AU
Mars	1.3087 AU	-0.4423 AU	-0.0414 AU


With these coordinates, the sun is at the origin and the earth's orbit is in the  $xy$ -plane. The earth passes through the  $+x$ -axis once a year on the autumnal equinox, the first day of autumn in the northern hemisphere (on or about September 22). One AU, or *astronomical unit*, is equal to  $1.496 \times 10^8 \text{ km}$ , the average distance from the earth to the sun. (a) Draw the positions of the sun, the earth, and Mars on December 3, 1999. (b) Find these distances in AU on December 3, 1999: from (i) the sun to the earth; (ii) the sun to Mars; (iii) the earth to Mars. (c) As seen from the earth, what was the angle between the direction to the sun and the direction to Mars on December 3, 1999? (d) Explain whether Mars was visible from your current location at midnight on December 3, 1999. (When it is midnight, the sun is on the opposite side of the earth from you.)

## CHALLENGE PROBLEMS

**1.90 ••• Drone Delivery.** You are testing parcel delivery by drone for a project. Your team uses vector displacements to record the route of the drone, with the origin taken to be the position of the control centre. During one test, the drone starts its flight at  $+10\hat{i} - 50\hat{j}$ , where the units are meters,  $\hat{i}$  is to the east, and  $\hat{j}$  is to the north. Subsequent displacements of the drone are  $+90\hat{i}$ ,  $+110\hat{j}$ ,  $-60\hat{i} + 40\hat{j}$ , and  $+120\hat{i} + 180\hat{j}$ . If the final destination of the drone is  $-70\hat{j}$ , how far and in which direction must the drone fly? (You are well advised to diagram the situation before solving this numerically.)

**1.91 ••• Navigating in the Big Dipper.** All of the stars of the Big Dipper (part of the constellation Ursa Major) may appear to be the same distance from the earth, but in fact they are very far from each other. **Figure P1.91** shows the distances from the earth to each of these stars. The distances are given in light-years (ly), the distance that light travels in one year. One light-year equals  $9.461 \times 10^{15} \text{ m}$ . (a) Alkaid and Merak are  $25.6^\circ$  apart in the earth's sky. In a diagram, show the relative positions of Alkaid, Merak, and our sun. Find the distance in light-years from Alkaid to Merak. (b) To an inhabitant of a planet orbiting Merak, how many degrees apart in the sky would Alkaid and our sun be?

Figure P1.91

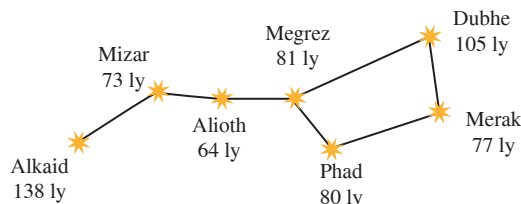

### MCAT-STYLE PASSAGE PROBLEMS

**BIO Calculating Lung Volume in Humans.** In humans, oxygen and carbon dioxide are exchanged in the blood within many small sacs called alveoli in the lungs. Alveoli provide a large surface area for gas exchange. Recent careful measurements show that the total number of alveoli in a typical pair of lungs is about  $480 \times 10^6$  and that the average volume of a single alveolus is  $4.2 \times 10^6 \mu\text{m}^3$ . (The volume of a sphere is  $V = \frac{4}{3}\pi r^3$ , and the area of a sphere is  $A = 4\pi r^2$ .)


**1.92** What is total volume of the gas-exchanging region of the lungs? (a)  $2000 \mu\text{m}^3$ ; (b)  $2 \text{ m}^3$ ; (c) 2.0 L; (d) 120 L.

**1.93** If we assume that alveoli are spherical, what is the diameter of a typical alveolus? (a) 0.20 mm; (b) 2 mm; (c) 20 mm; (d) 200 mm.

**1.94** Individuals vary considerably in total lung volume. **Figure P1.94** shows the results of measuring the total lung volume and average alveolar volume of six individuals. From these data, what can you infer about the relationship among alveolar size, total lung volume, and number of alveoli per individual? As the total volume of the lungs increases,

(a) the number and volume of individual alveoli increase; (b) the number of alveoli increases and the volume of individual alveoli decreases; (c) the volume of the individual alveoli remains constant and the number of alveoli increases; (d) both the number of alveoli and the volume of individual alveoli remain constant.

Figure P1.94

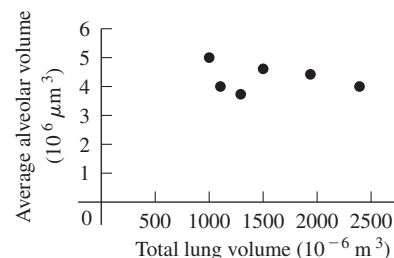

## ANSWERS

### Chapter Opening Question ?

(iii) Take the  $+x$ -axis to point east and the  $+y$ -axis to point north. Then we need to find the  $y$ -component of the velocity vector, which has magnitude  $v = 15 \text{ km/h}$  and is at an angle  $\theta = 37^\circ$  measured from the  $+x$ -axis toward the  $+y$ -axis. From Eqs. (1.5) we have  $v_y = v \sin \theta = (15 \text{ km/h}) \sin 37^\circ = 9.0 \text{ km/h}$ . So the thunderstorm moves 9.0 km north in 1 h and 18 km north in 2 h.

### Key Example **V**ARIATION Problems

**VP1.7.1**  $D = 12.7 \text{ m}$ ,  $\theta = -51^\circ = 309^\circ$  (fourth quadrant)

**VP1.7.2**  $S = 115 \text{ m}$ ,  $\theta = 42^\circ$  (first quadrant)

**VP1.7.3** (a)  $T_x = -7.99 \text{ m}$ ,  $T_y = -7.88 \text{ m}$  (b)  $T = 11.2 \text{ m}$ ,  $\theta = 225^\circ$  (third quadrant)

**VP1.7.4**  $68.7 \text{ m}$ ,  $\theta = 207^\circ$  (third quadrant)

**VP1.10.1** (a)  $A_x = 4.00$ ,  $A_y = -3.00$ ,  $B_x = -2.19$ ,  $B_y = 6.01$

(b)  $\vec{A} \cdot \vec{B} = -26.8$

**VP1.10.2** (a)  $\vec{C} \cdot \vec{D} = -26.8$  (b)  $\phi = 115^\circ$

**VP1.10.3**  $\phi = 91^\circ$

**VP1.10.4** (a) 14.8 N (b)  $77.7^\circ$

### Bridging Problem

(a)  $5.2 \times 10^2 \text{ N}$

(b)  $4.5 \times 10^2 \text{ N} \cdot \text{m}$

? A typical runner gains speed gradually during the course of a sprinting foot race and then slows down after crossing the finish line. In which part of the motion is it accurate to say that the runner is accelerating? (i) During the race; (ii) after the runner crosses the finish line; (iii) both (i) and (ii); (iv) neither (i) nor (ii); (v) answer depends on how rapidly the runner gains speed during the race.



## 2 Motion Along a Straight Line

### LEARNING OUTCOMES

*In this chapter, you'll learn...*

- 2.1 How the ideas of displacement and average velocity help us describe straight-line motion.
- 2.2 The meaning of instantaneous velocity; the difference between velocity and speed.
- 2.3 How to use average acceleration and instantaneous acceleration to describe changes in velocity.
- 2.4 How to use equations and graphs to solve problems that involve straight-line motion with constant acceleration.
- 2.5 How to solve problems in which an object is falling freely under the influence of gravity alone.
- 2.6 How to analyze straight-line motion when the acceleration is not constant.

*You'll need to review...*

- 1.7 The displacement vector.
- 1.8 Components of a vector.

What distance must an airliner travel down a runway before it reaches takeoff speed? When you throw a ball straight up in the air, how high does it go? When a glass slips from your hand, how much time do you have to catch it before it hits the floor? These are the kinds of questions you'll learn to answer in this chapter. *Mechanics* is the study of the relationships among force, matter, and motion. In this chapter and the next we'll study *kinematics*, the part of mechanics that enables us to describe motion. Later we'll study *dynamics*, which helps us understand why objects move in different ways.

In this chapter we'll concentrate on the simplest kind of motion: an object moving along a straight line. To describe this motion, we introduce the physical quantities *velocity* and *acceleration*. In physics these quantities have definitions that are more precise and slightly different from the ones used in everyday language. Both velocity and acceleration are *vectors*: As you learned in Chapter 1, this means that they have both magnitude and direction. Our concern in this chapter is with motion along a straight line only, so we won't need the full mathematics of vectors just yet. But using vectors will be essential in Chapter 3 when we consider motion in two or three dimensions.

We'll develop simple equations to describe straight-line motion in the important special case when acceleration is constant. An example is the motion of a freely falling object. We'll also consider situations in which acceleration varies during the motion; in this case, it's necessary to use integration to describe the motion. (If you haven't studied integration yet, Section 2.6 is optional.)


### 2.1 DISPLACEMENT, TIME, AND AVERAGE VELOCITY

Suppose a drag racer drives her dragster along a straight track (**Fig. 2.1**). To study the dragster's motion, we need a coordinate system. We choose the  $x$ -axis to lie along the dragster's straight-line path, with the origin  $O$  at the starting line. We also choose a point on the dragster, such as its front end, and represent the entire dragster by that point. Hence we treat the dragster as a **particle**.

A useful way to describe the motion of this particle is in terms of the change in its coordinate  $x$  over a time interval. Suppose that 1.0 s after the start the front of the dragster is at point  $P_1$ , 19 m from the origin, and 4.0 s after the start it is at point  $P_2$ , 277 m



Figure 2.1 Positions of a dragster at two times during its run.

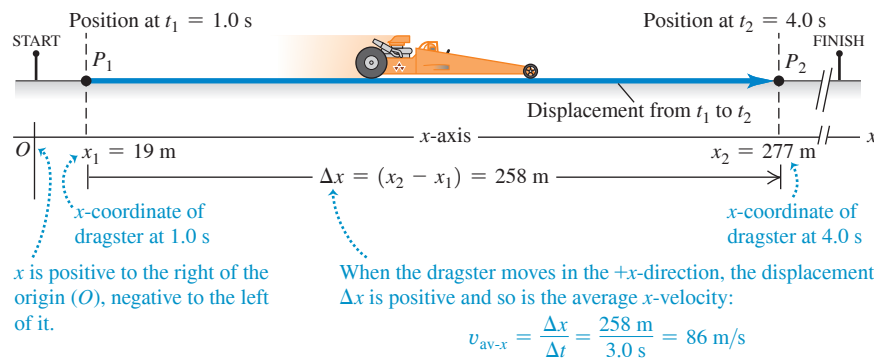

from the origin. The *displacement* of the particle is a vector that points from  $P_1$  to  $P_2$  (see Section 1.7). Figure 2.1 shows that this vector points along the  $x$ -axis. The  $x$ -component (see Section 1.8) of the displacement is the change in the value of  $x$ ,  $(277 \text{ m} - 19 \text{ m}) = 258 \text{ m}$ , that took place during the time interval of  $(4.0 \text{ s} - 1.0 \text{ s}) = 3.0 \text{ s}$ . We define the dragster's **average velocity** during this time interval as a *vector* whose  $x$ -component is the change in  $x$  divided by the time interval:  $(258 \text{ m})/(3.0 \text{ s}) = 86 \text{ m/s}$ .

In general, the average velocity depends on the particular time interval chosen. For a 3.0 s time interval *before* the start of the race, the dragster is at rest at the starting line and has zero displacement, so its average velocity for this time interval is zero.

Let's generalize the concept of average velocity. At time  $t_1$  the dragster is at point  $P_1$ , with coordinate  $x_1$ , and at time  $t_2$  it is at point  $P_2$ , with coordinate  $x_2$ . The displacement of the dragster during the time interval from  $t_1$  to  $t_2$  is the vector from  $P_1$  to  $P_2$ . The  $x$ -component of the displacement, denoted  $\Delta x$ , is the change in the coordinate  $x$ :

$$\Delta x = x_2 - x_1 \quad (2.1)$$

The dragster moves along the  $x$ -axis only, so the  $y$ - and  $z$ -components of the displacement are equal to zero.

The  $x$ -component of average velocity, or the **average  $x$ -velocity**, is the  $x$ -component of displacement,  $\Delta x$ , divided by the time interval  $\Delta t$  during which the displacement occurs. We use the symbol  $v_{\text{av-}x}$  for average  $x$ -velocity (the subscript "av" signifies average value, and the subscript  $x$  indicates that this is the  $x$ -component):

$$v_{\text{av-}x} = \frac{\Delta x}{\Delta t} = \frac{x_2 - x_1}{t_2 - t_1} \quad (2.2)$$

Average  $x$ -velocity of a particle in straight-line motion during time interval from  $t_1$  to  $t_2$ 
 $x$ -component of the particle's displacement
Final  $x$ -coordinate minus initial  $x$ -coordinate

Time interval
Final time minus initial time

As an example, for the dragster in Fig. 2.1,  $x_1 = 19 \text{ m}$ ,  $x_2 = 277 \text{ m}$ ,  $t_1 = 1.0 \text{ s}$ , and  $t_2 = 4.0 \text{ s}$ . So Eq. (2.2) gives

$$v_{\text{av-}x} = \frac{277 \text{ m} - 19 \text{ m}}{4.0 \text{ s} - 1.0 \text{ s}} = \frac{258 \text{ m}}{3.0 \text{ s}} = 86 \text{ m/s}$$

The average  $x$ -velocity of the dragster is positive. This means that during the time interval, the coordinate  $x$  increased and the dragster moved in the positive  $x$ -direction (to the right in Fig. 2.1).

If a particle moves in the *negative*  $x$ -direction during a time interval, its average velocity for that time interval is negative. For example, suppose an official's truck moves to the left along the track (Fig. 2.2, next page). The truck is at  $x_1 = 277 \text{ m}$  at  $t_1 = 16.0 \text{ s}$  and is at  $x_2 = 19 \text{ m}$  at  $t_2 = 25.0 \text{ s}$ . Then  $\Delta x = (19 \text{ m} - 277 \text{ m}) = -258 \text{ m}$  and  $\Delta t = (25.0 \text{ s} - 16.0 \text{ s}) = 9.0 \text{ s}$ . The  $x$ -component of average velocity is  $v_{\text{av-}x} = \Delta x / \Delta t = (-258 \text{ m}) / (9.0 \text{ s}) = -29 \text{ m/s}$ .

**Table 2.1** lists some simple rules for deciding whether the  $x$ -velocity is positive or negative.


**CAUTION** The meaning of  $\Delta x$  Note that  $\Delta x$  is *not* the product of  $\Delta$  and  $x$ ; it is a single symbol that means "the change in quantity  $x$ ." We use the Greek capital letter  $\Delta$  (delta) to represent a *change* in a quantity, equal to the *final* value of the quantity minus the *initial* value—never the reverse. Likewise, the time interval from  $t_1$  to  $t_2$  is  $\Delta t$ , the change in  $t$ :  $\Delta t = t_2 - t_1$  (final time minus initial time). I

**TABLE 2.1** Rules for the Sign of  $x$ -Velocity

If $x$ -coordinate is:	... $x$ -velocity is:
Positive & increasing (getting more positive)	Positive: Particle is moving in $+x$ -direction
Positive & decreasing (getting less positive)	Negative: Particle is moving in $-x$ -direction
Negative & increasing (getting less negative)	Positive: Particle is moving in $+x$ -direction
Negative & decreasing (getting more negative)	Negative: Particle is moving in $-x$ -direction

*Note:* These rules apply to both the average  $x$ -velocity  $v_{\text{av-}x}$  and the instantaneous  $x$ -velocity  $v_x$  (to be discussed in Section 2.2).

Figure 2.2 Positions of an official's truck at two times during its motion. The points  $P_1$  and  $P_2$  now indicate the positions of the truck, not the dragster, and so are the reverse of Fig. 2.1.

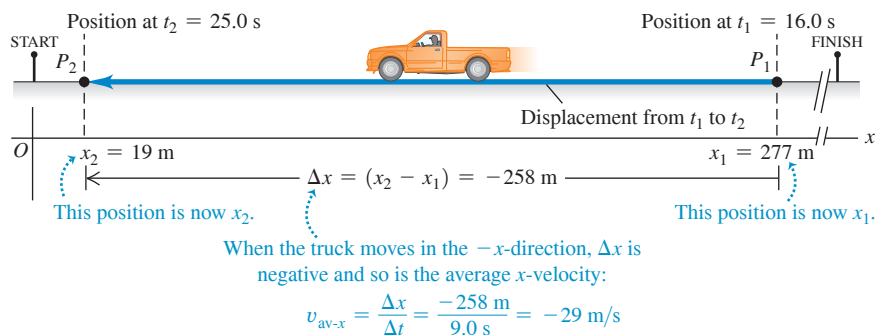

**CAUTION** The sign of average  $x$ -velocity In our example positive  $v_{\text{av-}x}$  means motion to the right, as in Fig. 2.1, and negative  $v_{\text{av-}x}$  means motion to the left, as in Fig. 2.2. But that's *only* because we chose the  $+x$ -direction to be to the right. Had we chosen the  $+x$ -direction to be to the left, the average  $x$ -velocity  $v_{\text{av-}x}$  would have been negative for the dragster moving to the right and positive for the truck moving to the left. In many problems the direction of the coordinate axis is yours to choose. Once you've made your choice, you *must* take it into account when interpreting the signs of  $v_{\text{av-}x}$  and other quantities that describe motion! **|**

With straight-line motion we sometimes call  $\Delta x$  simply the displacement and  $v_{\text{av-}x}$  simply the average velocity. But remember that these are the  $x$ -components of vector quantities that, in this special case, have *only*  $x$ -components. In Chapter 3, displacement, velocity, and acceleration vectors will have two or three nonzero components.

Figure 2.3 is a graph of the dragster's position as a function of time—that is, an  $x$ - $t$  graph. The curve in the figure *does not* represent the dragster's path; as Fig. 2.1 shows, the path is a straight line. Rather, the graph represents how the dragster's position changes with time. The points  $p_1$  and  $p_2$  on the graph correspond to the points  $P_1$  and  $P_2$  along the dragster's path. Line  $p_1p_2$  is the hypotenuse of a right triangle with vertical side  $\Delta x = x_2 - x_1$  and horizontal side  $\Delta t = t_2 - t_1$ . The average  $x$ -velocity  $v_{\text{av-}x} = \Delta x / \Delta t$  of the dragster equals the *slope* of the line  $p_1p_2$ —that is, the ratio of the triangle's vertical side  $\Delta x$  to its horizontal side  $\Delta t$ . (The slope has units of meters divided by seconds, or m/s, the correct units for average  $x$ -velocity.)


The average  $x$ -velocity depends on only the total displacement  $\Delta x = x_2 - x_1$  that occurs during the time interval  $\Delta t = t_2 - t_1$ , not on what happens during the time interval. At time  $t_1$  a motorcycle might have raced past the dragster at point  $P_1$  in Fig. 2.1, then slowed down to pass through point  $P_2$  at the same time  $t_2$  as the dragster. Both vehicles have the same displacement during the same time interval and so have the same average  $x$ -velocity.

If distance is given in meters and time in seconds, average velocity is measured in meters per second, or m/s (Table 2.2). Other common units of velocity are kilometers per hour (km/h), miles per hour (1 mi/h = 1.609 km/h), and knots (1 knot = 1 nautical mile/h = 1.852 km/h).

TABLE 2.2 Typical Velocity Magnitudes

A snail's pace	$10^{-3}$ m/s
A brisk walk	2 m/s
Fastest human	11 m/s
Motorway speed	30 m/s
Fastest car	341 m/s
Random motion of air molecules	500 m/s
Fastest airplane	1000 m/s
Orbiting communications satellite	3000 m/s
Average speed of an electron in a hydrogen atom	$2 \times 10^6$ m/s
Light traveling in vacuum	$3 \times 10^8$ m/s

Figure 2.3 A graph of the position of a dragster as a function of time.

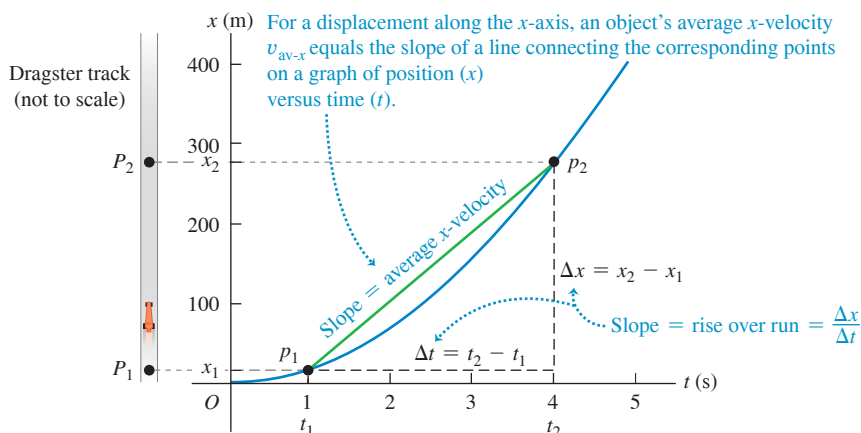

**TEST YOUR UNDERSTANDING OF SECTION 2.1** Five cars, *A*, *B*, *C*, *D*, and *E*, each take a trip that lasts one hour. The positive *x*-direction is to the east. (i) *A* travels 50 km due east. (ii) *B* travels 50 km due west. (iii) *C* travels 60 km due east, then turns around and travels 10 km due west. (iv) *D* travels 70 km due east. (v) *E* travels 20 km due west, then turns around and travels 20 km due east. (a) Rank the five trips in order of average *x*-velocity from most positive to most negative. (b) Which trips, if any, have the same average *x*-velocity? (c) For which trip, if any, is the average *x*-velocity equal to zero?

**ANSWERS**

(a) (i)  $v_{av-x} = 50 \text{ km/h}$ ; (ii)  $v_{av-x} = -50 \text{ km/h}$ ; (iii)  $v_{av-x} = 50 \text{ km/h} - 10 \text{ km/h} = 40 \text{ km/h}$ ; (iv)  $v_{av-x} = 70 \text{ km/h}$ ; (v)  $v_{av-x} = -20 \text{ km/h} + 20 \text{ km/h} = 0$ . (b) In (a) the average *x*-velocity is  $\Delta x/\Delta t$ . For all five trips,  $\Delta t = 1 \text{ h}$ . For the individual trips, (i)  $\Delta x = +50 \text{ km}$ ; (ii)  $\Delta x = -50 \text{ km}$ ; (iii)  $\Delta x = +60 \text{ km} - 10 \text{ km} = +50 \text{ km}$ ; (iv)  $\Delta x = +70 \text{ km}$ ; (v)  $\Delta x = -20 \text{ km} + 20 \text{ km} = 0$ . In (b) both have  $v_{av-x} = 50 \text{ km/h}$ .

**2.2 INSTANTANEOUS VELOCITY**

Sometimes average velocity is all you need to know about a particle’s motion. For example, a race along a straight line is really a competition to see whose average velocity,  $v_{av-x}$ , has the greatest magnitude. The prize goes to the competitor who can travel the displacement  $\Delta x$  from the start to the finish line in the shortest time interval,  $\Delta t$  (Fig. 2.4).

But the average velocity of a particle during a time interval can’t tell us how fast, or in what direction, the particle was moving at any given time during the interval. For that we need to know the **instantaneous velocity**, or the velocity at a specific instant of time or specific point along the path.

**CAUTION How long is an instant?** You might use the phrase “It lasted just an instant” to refer to something that spanned a very short time interval. But in physics an instant has no duration at all; it refers to a single value of time. |

To find the instantaneous velocity of the dragster in Fig. 2.1 at point  $P_1$ , we move point  $P_2$  closer and closer to point  $P_1$  and compute the average velocity  $v_{av-x} = \Delta x/\Delta t$  over the ever-shorter displacement and time interval. Both  $\Delta x$  and  $\Delta t$  become very small, but their ratio does not necessarily become small. In the language of calculus, the limit of  $\Delta x/\Delta t$  as  $\Delta t$  approaches zero is called the **derivative** of *x* with respect to *t* and is written  $dx/dt$ . We use the symbol  $v_x$ , with no “av” subscript, for the instantaneous velocity along the *x*-axis, or the **instantaneous *x*-velocity**:

The **instantaneous *x*-velocity** of a particle in straight-line motion ...

$$v_x = \lim_{\Delta t \rightarrow 0} \frac{\Delta x}{\Delta t} = \frac{dx}{dt} \quad (2.3)$$

... equals the limit of the particle’s average *x*-velocity as the time interval approaches zero ...

... and equals the instantaneous rate of change of the particle’s *x*-coordinate.

The time interval  $\Delta t$  is always positive, so  $v_x$  has the same algebraic sign as  $\Delta x$ . A positive value of  $v_x$  means that *x* is increasing and the motion is in the positive *x*-direction; a negative value of  $v_x$  means that *x* is decreasing and the motion is in the negative *x*-direction. An object can have positive *x* and negative  $v_x$ , or the reverse; *x* tells us where the object is, while  $v_x$  tells us how it’s moving (Fig. 2.5). The rules that we presented in Table 2.1 (Section 2.1) for the sign of average *x*-velocity  $v_{av-x}$  also apply to the sign of instantaneous *x*-velocity  $v_x$ .

Instantaneous velocity, like average velocity, is a vector; Eq. (2.3) defines its *x*-component. In straight-line motion, all other components of instantaneous velocity are zero. In this case we often call  $v_x$  simply the instantaneous velocity. (In Chapter 3 we’ll deal with the general case in which the instantaneous velocity can have nonzero *x*-, *y*-, and *z*-components.) When we use the term “velocity,” we’ll always mean instantaneous rather than average velocity.

Figure 2.4 The winner of a 50 m swimming race is the swimmer whose average velocity has the greatest magnitude—that is, the swimmer who traverses a displacement  $\Delta x$  of 50 m in the shortest elapsed time  $\Delta t$ .



Figure 2.5 In any problem involving straight-line motion, the choice of which direction is positive and which is negative is entirely up to you.

A bicyclist moving to the left ...

... has a negative *x*-velocity  $v_x$  if we choose the positive *x*-direction to the right ...

... but has a positive *x*-velocity  $v_x$  if we choose the positive *x*-direction to the left.

“Velocity” and “speed” are used interchangeably in everyday language, but they have distinct definitions in physics. We use the term **speed** to denote distance traveled divided by time, on either an average or an instantaneous basis. Instantaneous *speed*, for which we use the symbol  $v$  with *no* subscripts, measures how fast a particle is moving; instantaneous *velocity* measures how fast *and* in what direction it’s moving. Instantaneous speed is the magnitude of instantaneous velocity and so can never be negative. For example, a particle with instantaneous velocity  $v_x = 25$  m/s and a second particle with  $v_x = -25$  m/s are moving in opposite directions at the same instantaneous speed 25 m/s.

**CAUTION Average speed and average velocity** Average speed is *not* the magnitude of average velocity. When César Cielo set a world record in 2009 by swimming 100.0 m in 46.91 s, his average speed was  $(100.0 \text{ m})/(46.91 \text{ s}) = 2.132$  m/s. But because he swam two lengths in a 50 m pool, he started and ended at the same point and so had zero total displacement and zero average *velocity*! Both average speed and instantaneous speed are scalars, not vectors, because these quantities contain no information about direction. **|**

### EXAMPLE 2.1 Average and instantaneous velocities

A cheetah is crouched 20 m to the east of a vehicle (**Fig. 2.6a**). At time  $t = 0$  the cheetah begins to run due east toward an antelope that is 50 m to the east of the vehicle. During the first 2.0 s of the chase, the cheetah’s  $x$ -coordinate varies with time according to the equation  $x = 20 \text{ m} + (5.0 \text{ m/s}^2)t^2$ . (a) Find the cheetah’s displacement between  $t_1 = 1.0$  s and  $t_2 = 2.0$  s. (b) Find its average velocity during that interval. (c) Find its instantaneous velocity at  $t_1 = 1.0$  s by taking  $\Delta t = 0.1$  s, then 0.01 s, then 0.001 s. (d) Derive an expression for the cheetah’s instantaneous velocity as a function of time, and use it to find  $v_x$  at  $t = 1.0$  s and  $t = 2.0$  s.

**IDENTIFY and SET UP** Figure 2.6b shows our sketch of the cheetah’s motion. We use Eq. (2.1) for displacement, Eq. (2.2) for average velocity, and Eq. (2.3) for instantaneous velocity.

**EXECUTE** (a) At  $t_1 = 1.0$  s and  $t_2 = 2.0$  s the cheetah’s positions  $x_1$  and  $x_2$  are

$$x_1 = 20 \text{ m} + (5.0 \text{ m/s}^2)(1.0 \text{ s})^2 = 25 \text{ m}$$

$$x_2 = 20 \text{ m} + (5.0 \text{ m/s}^2)(2.0 \text{ s})^2 = 40 \text{ m}$$

The displacement during this 1.0 s interval is

$$\Delta x = x_2 - x_1 = 40 \text{ m} - 25 \text{ m} = 15 \text{ m}$$

(b) The average  $x$ -velocity during this interval is

$$v_{\text{av-}x} = \frac{x_2 - x_1}{t_2 - t_1} = \frac{40 \text{ m} - 25 \text{ m}}{2.0 \text{ s} - 1.0 \text{ s}} = \frac{15 \text{ m}}{1.0 \text{ s}} = 15 \text{ m/s}$$

(c) With  $\Delta t = 0.1$  s the time interval is from  $t_1 = 1.0$  s to a new  $t_2 = 1.1$  s. At  $t_2$  the position is

$$x_2 = 20 \text{ m} + (5.0 \text{ m/s}^2)(1.1 \text{ s})^2 = 26.05 \text{ m}$$

The average  $x$ -velocity during this 0.1 s interval is

$$v_{\text{av-}x} = \frac{26.05 \text{ m} - 25 \text{ m}}{1.1 \text{ s} - 1.0 \text{ s}} = 10.5 \text{ m/s}$$


Following this pattern, you can calculate the average  $x$ -velocities for 0.01 s and 0.001 s intervals: The results are 10.05 m/s and 10.005 m/s. As  $\Delta t$  gets smaller, the average  $x$ -velocity gets closer to 10.0 m/s, so we conclude that the instantaneous  $x$ -velocity at  $t = 1.0$  s is 10.0 m/s. (We suspended the rules for significant-figure counting in these calculations.)

(d) From Eq. (2.3) the instantaneous  $x$ -velocity is  $v_x = dx/dt$ . The derivative of a constant is zero and the derivative of  $t^2$  is  $2t$ , so

$$v_x = \frac{dx}{dt} = \frac{d}{dt} [20 \text{ m} + (5.0 \text{ m/s}^2)t^2]$$

$$= 0 + (5.0 \text{ m/s}^2)(2t) = (10 \text{ m/s}^2)t$$

Figure 2.6 A cheetah attacking an antelope from ambush. The animals are not drawn to the same scale as the axis.

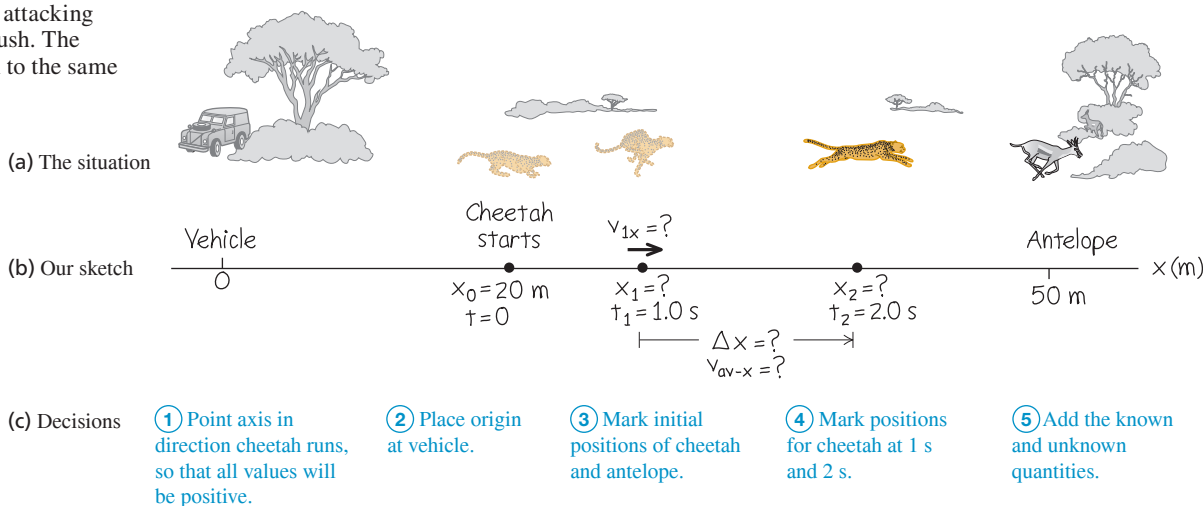

At  $t = 1.0$  s, this yields  $v_x = 10$  m/s, as we found in part (c); at  $t = 2.0$  s,  $v_x = 20$  m/s.

**EVALUATE** Our results show that the cheetah picked up speed from  $t = 0$  (when it was at rest) to  $t = 1.0$  s ( $v_x = 10$  m/s) to  $t = 2.0$  s ( $v_x = 20$  m/s). This makes sense; the cheetah covered only 5 m during the interval  $t = 0$  to  $t = 1.0$  s, but it covered 15 m during the interval  $t = 1.0$  s to  $t = 2.0$  s.

**KEYCONCEPT** To calculate the average velocity of an object in straight-line motion, first find its displacement (final coordinate minus initial coordinate) during a time interval. Then divide by the time interval. To calculate the object's instantaneous velocity (its average velocity over an infinitesimally short time interval), take the derivative of its position with respect to time.

## Finding Velocity on an $x$ - $t$ Graph

We can also find the  $x$ -velocity of a particle from the graph of its position as a function of time. Suppose we want to find the  $x$ -velocity of the dragster in Fig. 2.1 at point  $P_1$ . As point  $P_2$  in Fig. 2.1 approaches point  $P_1$ , point  $p_2$  in the  $x$ - $t$  graphs of Figs. 2.7a and 2.7b approaches point  $p_1$  and the average  $x$ -velocity is calculated over shorter time intervals  $\Delta t$ . In the limit that  $\Delta t \rightarrow 0$ , shown in Fig. 2.7c, the slope of the line  $p_1p_2$  equals the slope of the line tangent to the curve at point  $p_1$ . Thus, *on a graph of position as a function of time for straight-line motion, the instantaneous  $x$ -velocity at any point is equal to the slope of the tangent to the curve at that point.*

If the tangent to the  $x$ - $t$  curve slopes upward to the right, as in Fig. 2.7c, then its slope is positive, the  $x$ -velocity is positive, and the motion is in the positive  $x$ -direction. If the tangent slopes downward to the right, the slopes of the  $x$ - $t$  graph and the  $x$ -velocity are negative, and the motion is in the negative  $x$ -direction. When the tangent is horizontal, the slope and the  $x$ -velocity are zero. **Figure 2.8** illustrates these three possibilities.

Figure 2.7 Using an  $x$ - $t$  graph to go from (a), (b) average  $x$ -velocity to (c) instantaneous  $x$ -velocity  $v_x$ . In (c) we find the slope of the tangent to the  $x$ - $t$  curve by dividing any vertical interval (with distance units) along the tangent by the corresponding horizontal interval (with time units).


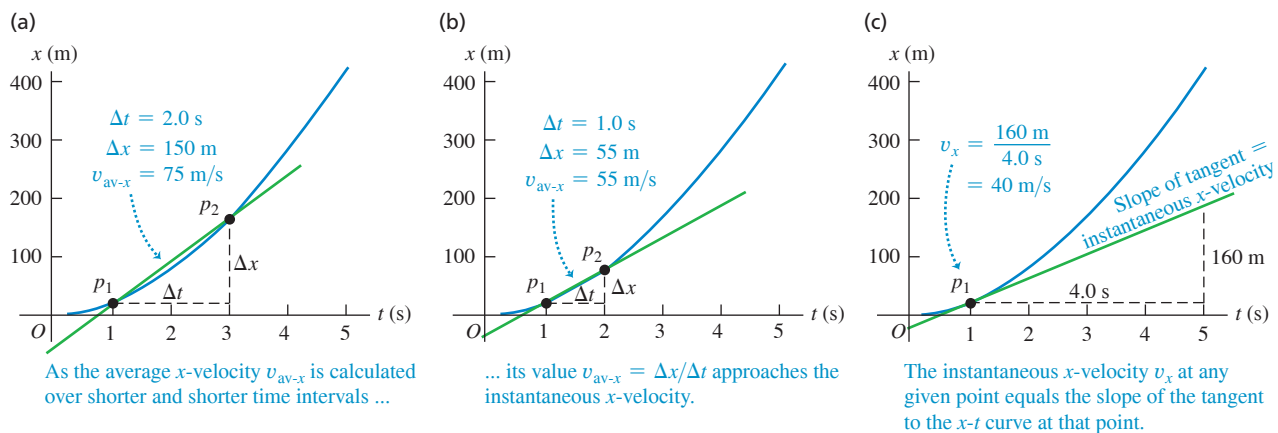



Figure 2.8 (a) The  $x$ - $t$  graph of the motion of a particular particle. (b) A motion diagram showing the position and velocity of the particle at each of the times labeled on the  $x$ - $t$  graph.

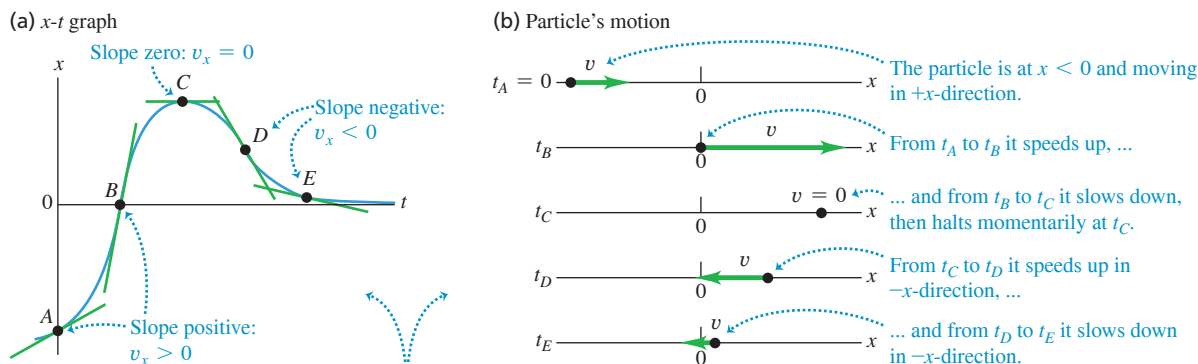

- On an  $x$ - $t$  graph, the slope of the tangent at any point equals the particle's velocity at that point.
- The steeper the slope (positive or negative), the greater the particle's speed in the positive or negative  $x$ -direction.

Figure 2.8 depicts the motion of a particle in two ways: as (a) an  $x$ - $t$  graph and (b) a **motion diagram** that shows the particle's position at various instants (like frames from a video of the particle's motion) as well as arrows to represent the particle's velocity at each instant. We'll use both  $x$ - $t$  graphs and motion diagrams in this chapter to represent motion. You'll find it helpful to draw *both* an  $x$ - $t$  graph and a motion diagram when you solve any problem involving motion.

Figure 2.9 An  $x$ - $t$  graph for a particle.

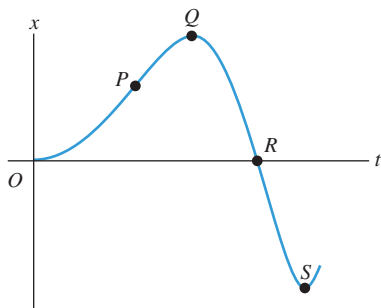

**TEST YOUR UNDERSTANDING OF SECTION 2.2** Figure 2.9 is an  $x$ - $t$  graph of the motion of a particle. (a) Rank the values of the particle's  $x$ -velocity  $v_x$  at points  $P$ ,  $Q$ ,  $R$ , and  $S$  from most positive to most negative. (b) At which points is  $v_x$  positive? (c) At which points is  $v_x$  negative? (d) At which points is  $v_x$  zero? (e) Rank the values of the particle's *speed* at points  $P$ ,  $Q$ ,  $R$ , and  $S$  from fastest to slowest.

**ANSWER**

(a)  $P$ ,  $Q$ ,  $R$ , and  $S$  (ie),  $R$  (b) The  $x$ -velocity is positive (c) negative when the slope is negative ( $R$ ), and zero when the slope is zero ( $Q$  and  $S$ ). (d) The speed is greatest when the slope of the  $x$ - $t$  graph is steepest (either positive or negative) and zero when the slope is zero. (e) (a)  $P$ ,  $Q$ ,  $R$ , and  $S$  (ie),  $R$

## 2.3 AVERAGE AND INSTANTANEOUS ACCELERATION

Just as velocity describes the rate of change of position with time, *acceleration* <sup>?</sup> describes the rate of change of velocity with time. Like velocity, acceleration is a vector quantity. When the motion is along a straight line, its only nonzero component is along that line. In everyday language, acceleration refers only to speeding up; in physics, acceleration refers to *any* kind of velocity change, so we say an object accelerates if it is either speeding up or slowing down.

### Average Acceleration

Let's consider again a particle moving along the  $x$ -axis. Suppose that at time  $t_1$  the particle is at point  $P_1$  and has  $x$ -component of (instantaneous) velocity  $v_{1x}$ , and at a later time  $t_2$  it is at point  $P_2$  and has  $x$ -component of velocity  $v_{2x}$ . So the  $x$ -component of velocity changes by an amount  $\Delta v_x = v_{2x} - v_{1x}$  during the time interval  $\Delta t = t_2 - t_1$ . As the particle moves from  $P_1$  to  $P_2$ , its **average acceleration** is a vector quantity whose  $x$ -component  $a_{\text{av-}x}$  (called the **average  $x$ -acceleration**) equals  $\Delta v_x$ , the change in the  $x$ -component of velocity, divided by the time interval  $\Delta t$ :

$$a_{\text{av-}x} = \frac{\Delta v_x}{\Delta t} = \frac{v_{2x} - v_{1x}}{t_2 - t_1} \quad (2.4)$$

Average  $x$ -acceleration of a particle in straight-line motion during time interval from  $t_1$  to  $t_2$      
 Change in  $x$ -component of the particle's velocity     
 Final  $x$ -velocity minus initial  $x$ -velocity  
Time interval      Final time minus initial time

For straight-line motion along the  $x$ -axis we'll often call  $a_{\text{av-}x}$  simply the average acceleration. (We'll encounter the other components of the average acceleration vector in Chapter 3.)

If we express velocity in meters per second and time in seconds, then average acceleration is in meters per second per second. This is usually written as  $\text{m/s}^2$  and is read "meters per second squared."

**CAUTION Don't confuse velocity and acceleration** Velocity describes how an object's position changes with time; it tells us how fast and in what direction the object moves. Acceleration describes how the velocity changes with time; it tells us how the speed and direction of motion change. Another difference is that you can *feel* acceleration but you can't feel velocity. If you're a passenger in a car that accelerates forward and gains speed, you feel pushed backward in your seat; if it accelerates backward and loses speed, you feel pushed forward. If the velocity is constant and there's no acceleration, you feel neither sensation. (We'll explain these sensations in Chapter 4.)

### EXAMPLE 2.2 Average acceleration

An astronaut has left an orbiting spacecraft to test a new personal maneuvering unit. As she moves along a straight line, her partner on the spacecraft measures her velocity every 2.0 s, starting at time  $t = 1.0$  s:

$t$	$v_x$	$t$	$v_x$
1.0 s	0.8 m/s	9.0 s	-0.4 m/s
3.0 s	1.2 m/s	11.0 s	-1.0 m/s
5.0 s	1.6 m/s	13.0 s	-1.6 m/s
7.0 s	1.2 m/s	15.0 s	-0.8 m/s

Find the average  $x$ -acceleration, and state whether the speed of the astronaut increases or decreases over each of these 2.0 s time intervals: (a)  $t_1 = 1.0$  s to  $t_2 = 3.0$  s; (b)  $t_1 = 5.0$  s to  $t_2 = 7.0$  s; (c)  $t_1 = 9.0$  s to  $t_2 = 11.0$  s; (d)  $t_1 = 13.0$  s to  $t_2 = 15.0$  s.

**IDENTIFY and SET UP** We'll use Eq. (2.4) to determine the average acceleration  $a_{av-x}$  from the change in velocity over each time interval. To find the changes in speed, we'll use the idea that speed  $v$  is the magnitude of the instantaneous velocity  $v_x$ .

The upper part of Fig. 2.10 is our graph of the  $x$ -velocity as a function of time. On this  $v_x-t$  graph, the slope of the line connecting the endpoints of each interval is the average  $x$ -acceleration  $a_{av-x} = \Delta v_x / \Delta t$  for that interval. The four slopes (and thus the *signs* of the average accelerations) are, from left to right, positive, negative, negative, and positive. The third and fourth slopes (and thus the average accelerations themselves) have greater magnitude than the first and second.

**EXECUTE** Using Eq. (2.4), we find:


(a)  $a_{av-x} = (1.2 \text{ m/s} - 0.8 \text{ m/s}) / (3.0 \text{ s} - 1.0 \text{ s}) = 0.2 \text{ m/s}^2$ . The speed (magnitude of instantaneous  $x$ -velocity) increases from 0.8 m/s to 1.2 m/s.

(b)  $a_{av-x} = (1.2 \text{ m/s} - 1.6 \text{ m/s}) / (7.0 \text{ s} - 5.0 \text{ s}) = -0.2 \text{ m/s}^2$ . The speed decreases from 1.6 m/s to 1.2 m/s.

(c)  $a_{av-x} = [-1.0 \text{ m/s} - (-0.4 \text{ m/s})] / (11.0 \text{ s} - 9.0 \text{ s}) = -0.3 \text{ m/s}^2$ . The speed increases from 0.4 m/s to 1.0 m/s.

(d)  $a_{av-x} = [-0.8 \text{ m/s} - (-1.6 \text{ m/s})] / (15.0 \text{ s} - 13.0 \text{ s}) = 0.4 \text{ m/s}^2$ . The speed decreases from 1.6 m/s to 0.8 m/s.

Figure 2.10 Our graphs of  $x$ -velocity versus time (top) and average  $x$ -acceleration versus time (bottom) for the astronaut.

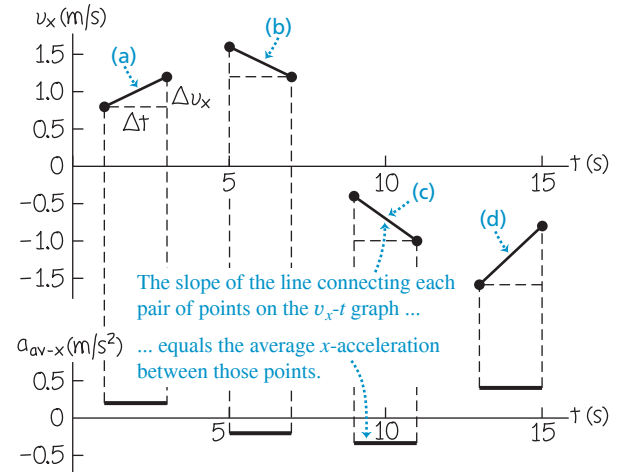

In the lower part of Fig. 2.10, we graph the values of  $a_{av-x}$ .

**EVALUATE** The signs and relative magnitudes of the average accelerations agree with our qualitative predictions.

Notice that when the average  $x$ -acceleration has the *same* algebraic sign as the initial velocity, as in intervals (a) and (c), the astronaut goes faster. When  $a_{av-x}$  has the *opposite* algebraic sign from the initial velocity, as in intervals (b) and (d), she slows down. Thus positive  $x$ -acceleration means speeding up if the  $x$ -velocity is positive [interval (a)] but slowing down if the  $x$ -velocity is negative [interval (d)]. Similarly, negative  $x$ -acceleration means speeding up if the  $x$ -velocity is negative [interval (c)] but slowing down if the  $x$ -velocity is positive [interval (b)].

**KEYCONCEPT** To calculate the average acceleration of an object in straight-line motion, first find the change in its velocity (final velocity minus initial velocity) during a time interval. Then divide by the time interval.

### Instantaneous Acceleration

We can now define **instantaneous acceleration** by following the same procedure that we used to define instantaneous velocity. Suppose a race car driver is driving along a straightaway as shown in Fig. 2.11. To define the instantaneous acceleration at point  $P_1$ , we take point  $P_2$  in Fig. 2.11 to be closer and closer to  $P_1$  so that the average acceleration is computed over shorter and shorter time intervals. Thus

The **instantaneous  $x$ -acceleration** of a particle in straight-line motion ...

$$a_x = \lim_{\Delta t \rightarrow 0} \frac{\Delta v_x}{\Delta t} = \frac{dv_x}{dt} \quad (2.5)$$

... equals the limit of the particle's average  $x$ -acceleration as the time interval approaches zero ...

... and equals the instantaneous rate of change of the particle's  $x$ -velocity.

Figure 2.11 A Grand Prix car at two points on the straightaway.



In Eq. (2.5)  $a_x$  is the  $x$ -component of the acceleration vector, which we call the **instantaneous  $x$ -acceleration**; in straight-line motion, all other components of this vector are zero. From now on, when we use the term “acceleration,” we’ll always mean instantaneous acceleration, not average acceleration.

### EXAMPLE 2.3 Average and instantaneous accelerations

Suppose the  $x$ -velocity  $v_x$  of the car in Fig. 2.11 at any time  $t$  is given by the equation

$$v_x = 60 \text{ m/s} + (0.50 \text{ m/s}^3)t^2$$

(a) Find the change in  $x$ -velocity of the car in the time interval  $t_1 = 1.0$  s to  $t_2 = 3.0$  s. (b) Find the average  $x$ -acceleration in this time interval. (c) Find the instantaneous  $x$ -acceleration at time  $t_1 = 1.0$  s by taking  $\Delta t$  to be first 0.1 s, then 0.01 s, then 0.001 s. (d) Derive an expression for the instantaneous  $x$ -acceleration as a function of time, and use it to find  $a_x$  at  $t = 1.0$  s and  $t = 3.0$  s.

**IDENTIFY and SET UP** This example is analogous to Example 2.1 in Section 2.2. In that example we found the average  $x$ -velocity from the change in position over shorter and shorter time intervals, and we obtained an expression for the instantaneous  $x$ -velocity by differentiating the position as a function of time. In this example we have an exact parallel. Using Eq. (2.4), we’ll find the average  $x$ -acceleration from the change in  $x$ -velocity over a time interval. Likewise, using Eq. (2.5), we’ll obtain an expression for the instantaneous  $x$ -acceleration by differentiating the  $x$ -velocity as a function of time.

**EXECUTE** (a) Before we can apply Eq. (2.4), we must find the  $x$ -velocity at each time from the given equation. At  $t_1 = 1.0$  s and  $t_2 = 3.0$  s, the velocities are

$$v_{1x} = 60 \text{ m/s} + (0.50 \text{ m/s}^3)(1.0 \text{ s})^2 = 60.5 \text{ m/s}$$

$$v_{2x} = 60 \text{ m/s} + (0.50 \text{ m/s}^3)(3.0 \text{ s})^2 = 64.5 \text{ m/s}$$

The change in  $x$ -velocity  $\Delta v_x$  between  $t_1 = 1.0$  s and  $t_2 = 3.0$  s is

$$\Delta v_x = v_{2x} - v_{1x} = 64.5 \text{ m/s} - 60.5 \text{ m/s} = 4.0 \text{ m/s}$$

(b) The average  $x$ -acceleration during this time interval of duration  $t_2 - t_1 = 2.0$  s is

$$a_{\text{av-}x} = \frac{v_{2x} - v_{1x}}{t_2 - t_1} = \frac{4.0 \text{ m/s}}{2.0 \text{ s}} = 2.0 \text{ m/s}^2$$

During this time interval the  $x$ -velocity and average  $x$ -acceleration have the same algebraic sign (in this case, positive), and the car speeds up.

(c) When  $\Delta t = 0.1$  s, we have  $t_2 = 1.1$  s. Proceeding as before, we find

$$v_{2x} = 60 \text{ m/s} + (0.50 \text{ m/s}^3)(1.1 \text{ s})^2 = 60.605 \text{ m/s}$$

$$\Delta v_x = 0.105 \text{ m/s}$$

$$a_{\text{av-}x} = \frac{\Delta v_x}{\Delta t} = \frac{0.105 \text{ m/s}}{0.1 \text{ s}} = 1.05 \text{ m/s}^2$$

You should follow this pattern to calculate  $a_{\text{av-}x}$  for  $\Delta t = 0.01$  s and  $\Delta t = 0.001$  s; the results are  $a_{\text{av-}x} = 1.005 \text{ m/s}^2$  and  $a_{\text{av-}x} = 1.0005 \text{ m/s}^2$ , respectively. As  $\Delta t$  gets smaller, the average  $x$ -acceleration gets closer to  $1.0 \text{ m/s}^2$ , so the instantaneous  $x$ -acceleration at  $t = 1.0$  s is  $1.0 \text{ m/s}^2$ .

(d) By Eq. (2.5) the instantaneous  $x$ -acceleration is  $a_x = dv_x/dt$ . The derivative of a constant is zero and the derivative of  $t^2$  is  $2t$ , so

$$a_x = \frac{dv_x}{dt} = \frac{d}{dt}[60 \text{ m/s} + (0.50 \text{ m/s}^3)t^2] = (0.50 \text{ m/s}^3)(2t) = (1.0 \text{ m/s}^3)t$$

When  $t = 1.0$  s,

$$a_x = (1.0 \text{ m/s}^3)(1.0 \text{ s}) = 1.0 \text{ m/s}^2$$

When  $t = 3.0$  s,

$$a_x = (1.0 \text{ m/s}^3)(3.0 \text{ s}) = 3.0 \text{ m/s}^2$$

**EVALUATE** Neither of the values we found in part (d) is equal to the average  $x$ -acceleration found in part (b). That’s because the car’s instantaneous  $x$ -acceleration varies with time. The rate of change of acceleration with time is sometimes called the “jerk.”

**KEYCONCEPT** To calculate an object’s instantaneous acceleration (its average acceleration over an infinitesimally short time interval), take the derivative of its velocity with respect to time.

### Finding Acceleration on a $v_x$ - $t$ Graph or an $x$ - $t$ Graph

In Section 2.2 we interpreted average and instantaneous  $x$ -velocity in terms of the slope of a graph of position versus time. In the same way, we can interpret average and instantaneous  $x$ -acceleration by using a graph of instantaneous velocity  $v_x$  versus time  $t$ —that is, a  **$v_x$ - $t$  graph** (Fig. 2.12). Points  $p_1$  and  $p_2$  on the graph correspond to points  $P_1$  and  $P_2$  in Fig. 2.11. The average  $x$ -acceleration  $a_{\text{av-}x} = \Delta v_x/\Delta t$  during this interval is the slope of the line  $p_1p_2$ .

As point  $P_2$  in Fig. 2.11 approaches point  $P_1$ , point  $p_2$  in the  $v_x$ - $t$  graph of Fig. 2.12 approaches point  $p_1$ , and the slope of the line  $p_1p_2$  approaches the slope of the line tangent to the curve at point  $p_1$ . Thus, *on a graph of  $x$ -velocity as a function of time, the instantaneous  $x$ -acceleration at any point is equal to the slope of the tangent to the curve at that point.* Tangents drawn at different points along the curve in Fig. 2.12 have different slopes, so the instantaneous  $x$ -acceleration varies with time.



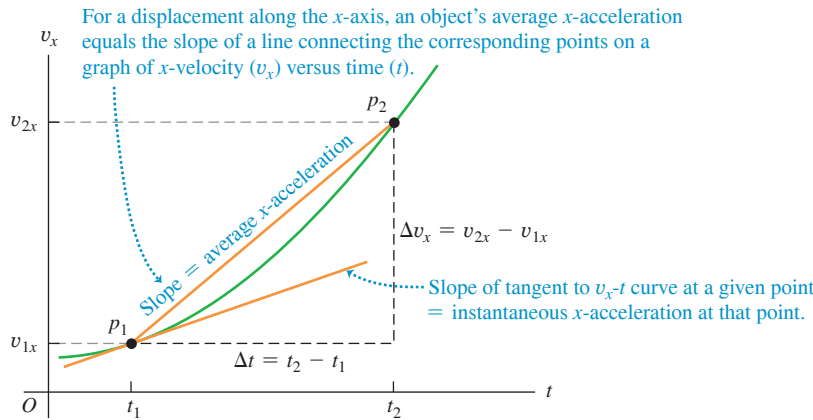


Figure 2.12 A  $v_x$ - $t$  graph of the motion in Fig. 2.11.

**CAUTION Signs of  $x$ -acceleration and  $x$ -velocity** The algebraic sign of the  $x$ -acceleration does not tell you whether an object is speeding up or slowing down. You must compare the signs of the  $x$ -velocity and the  $x$ -acceleration. As we saw in Example 2.2, when  $v_x$  and  $a_x$  have the same sign, the object is speeding up. When  $v_x$  and  $a_x$  have opposite signs, the object is slowing down. Table 2.3 summarizes these rules, and Fig. 2.13 illustrates some of them. ■

The term “deceleration” is sometimes used for a decrease in speed. Because it may mean positive or negative  $a_x$ , depending on the sign of  $v_x$ , we avoid this term.

We can also learn about the acceleration of an object from a graph of its position versus time. Because  $a_x = dv_x/dt$  and  $v_x = dx/dt$ , we can write

$$a_x = \frac{dv_x}{dt} = \frac{d}{dt} \left( \frac{dx}{dt} \right) = \frac{d^2x}{dt^2} \quad (2.6)$$

That is,  $a_x$  is the second derivative of  $x$  with respect to  $t$ . The second derivative of any function is directly related to the concavity or curvature of the graph of that function (Fig. 2.14, next page). At a point where the  $x$ - $t$  graph is concave up (curved upward), such as point A or E in Fig. 2.14a, the  $x$ -acceleration is positive and  $v_x$  is increasing. At a point where the  $x$ - $t$  graph is concave down (curved downward), such as point C in Fig. 2.14a, the  $x$ -acceleration is negative and  $v_x$  is decreasing. At a point where the  $x$ - $t$  graph has no curvature, such as the inflection points B and D in Fig. 2.14a, the  $x$ -acceleration is zero and the velocity is not changing.


Examining the curvature of an  $x$ - $t$  graph is an easy way to identify the sign of acceleration. This technique is less helpful for determining numerical values of acceleration because the curvature of a graph is hard to measure accurately.

TABLE 2.3 Rules for the Sign of  $x$ -Acceleration

If $x$ -velocity is:	... $x$ -acceleration is:
Positive & increasing (getting more positive)	Positive: Particle is moving in $+x$ -direction & speeding up
Positive & decreasing (getting less positive)	Negative: Particle is moving in $+x$ -direction & slowing down
Negative & increasing (getting less negative)	Positive: Particle is moving in $-x$ -direction & slowing down
Negative & decreasing (getting more negative)	Negative: Particle is moving in $-x$ -direction & speeding up


Note: These rules apply to both the average  $x$ -acceleration  $a_{av-x}$  and the instantaneous  $x$ -acceleration  $a_x$ .

Figure 2.13 (a) The  $v_x$ - $t$  graph of the motion of a different particle from that shown in Fig. 2.8. (b) A motion diagram showing the position, velocity, and acceleration of the particle at each of the times labeled on the  $v_x$ - $t$  graph.

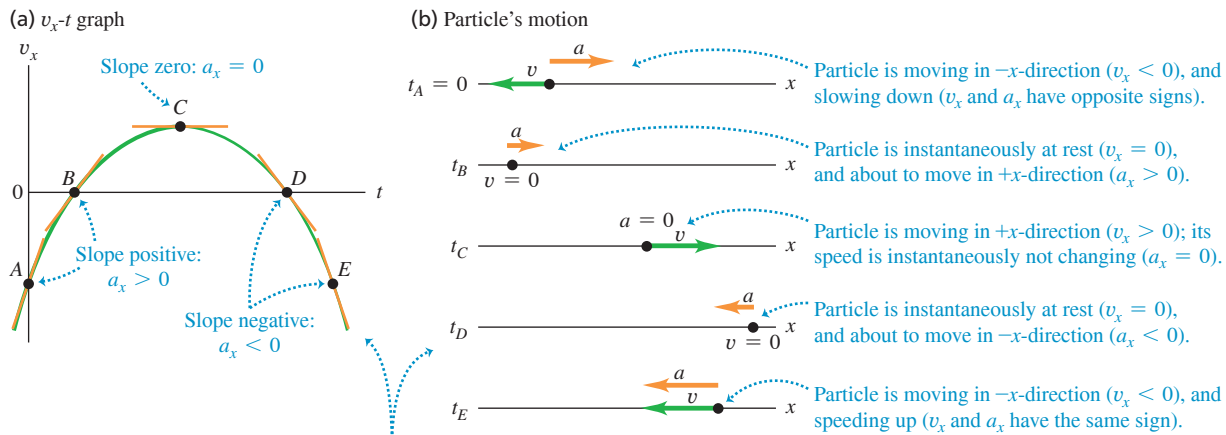

- On a  $v_x$ - $t$  graph, the slope of the tangent at any point equals the particle's acceleration at that point.
- The steeper the slope (positive or negative), the greater the particle's acceleration in the positive or negative  $x$ -direction.

Figure 2.14 (a) The same  $x-t$  graph as shown in Fig. 2.8a. (b) A motion diagram showing the position, velocity, and acceleration of the particle at each of the times labeled on the  $x-t$  graph.

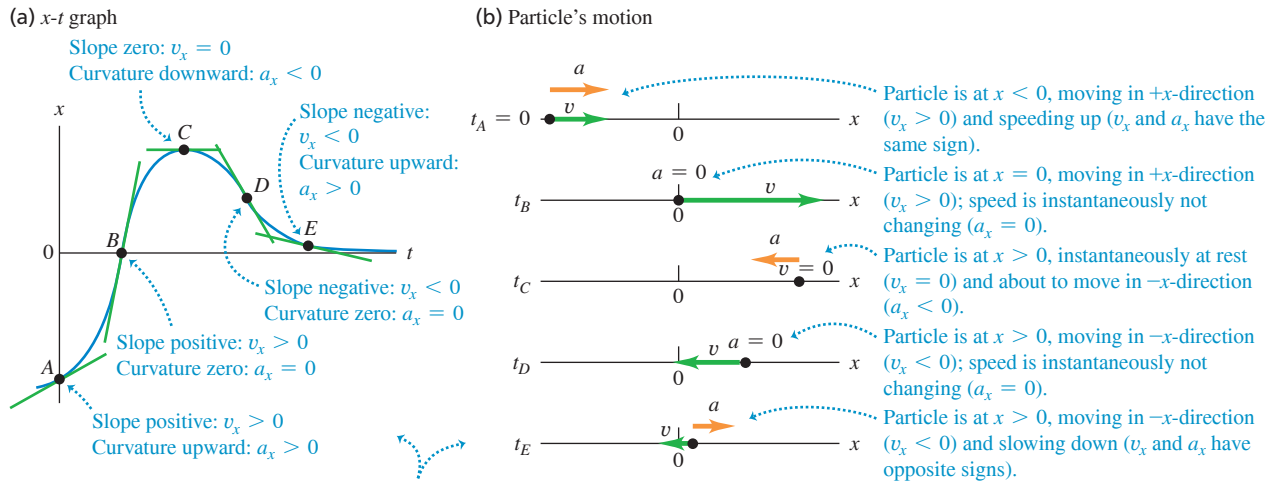

- On an  $x-t$  graph, the curvature at any point tells you the particle's acceleration at that point.
- The greater the curvature (positive or negative), the greater the particle's acceleration in the positive or negative  $x$ -direction.


Table 2.4 summarizes what you can learn from the  $x-t$  graph and  $v_x-t$  graph of the straight-line motion of a particle.

TABLE 2.4 What  $x-t$  Graphs and  $v_x-t$  Graphs Tell You

	On an $x-t$ graph	On a $v_x-t$ graph
The <i>value</i> of the graph at a given time tells you...	The coordinate $x$ at that time	The velocity $v_x$ at that time
The <i>slope</i> of the graph at a given time tells you...	The velocity $v_x$ at that time	The acceleration $a_x$ at that time
The <i>concavity</i> or <i>curvature</i> of the graph at a given time tells you...	The acceleration $a_x$ at that time	If the acceleration $a_x$ is changing at that time

**TEST YOUR UNDERSTANDING OF SECTION 2.3** Look again at the  $x-t$  graph in Fig. 2.9 at the end of Section 2.2. (a) At which of the points  $P$ ,  $Q$ ,  $R$ , and  $S$  is the  $x$ -acceleration  $a_x$  positive? (b) At which points is the  $x$ -acceleration negative? (c) At which points does the  $x$ -acceleration appear to be zero? (d) At each point state whether the velocity is increasing, decreasing, or not changing.

Figure 2.15 A motion diagram for a particle moving in a straight line in the positive  $x$ -direction with constant positive  $x$ -acceleration  $a_x$ .

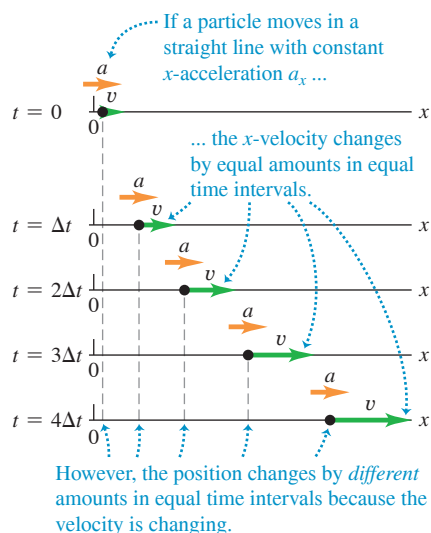

**ANSWER** (a)  $S$ , where the  $x-t$  graph is curved upward (concave up). (b)  $Q$ , where the  $x-t$  graph is curved downward (concave down). (c)  $P$  and  $R$ , where the  $x-t$  graph is not curved either up or down. (d) At  $P$ ,  $a_x = 0$  (velocity is **not changing**); at  $Q$ ,  $a_x > 0$  (velocity is **increasing**, i.e., changing from negative to positive); at  $R$ ,  $a_x = 0$  (velocity is **not changing**); and at  $S$ ,  $a_x < 0$  (velocity is **decreasing**, i.e., changing from positive to negative).

## 2.4 MOTION WITH CONSTANT ACCELERATION

The simplest kind of accelerated motion is straight-line motion with *constant* acceleration. In this case the velocity changes at the same rate throughout the motion. As an example, a falling object has a constant acceleration if the effects of the air are not important. The same is true for an object sliding on an incline or along a rough horizontal surface, or for an airplane being catapulted from the deck of an aircraft carrier.

Figure 2.15 is a motion diagram showing the position, velocity, and acceleration of a particle moving with constant acceleration. Figures 2.16 and 2.17 depict this same motion in the form of graphs. Since the  $x$ -acceleration is constant, the  $a_x-t$  graph (graph of  $x$ -acceleration versus time) in Fig. 2.16 is a horizontal line. The graph of  $x$ -velocity versus time, or  $v_x-t$  graph, has a constant *slope* because the acceleration is constant, so this graph is a straight line (Fig. 2.17).

When the  $x$ -acceleration  $a_x$  is constant, the average  $x$ -acceleration  $a_{av-x}$  for any time interval is the same as  $a_x$ . This makes it easy to derive equations for the position  $x$  and the  $x$ -velocity  $v_x$  as functions of time. To find an equation for  $v_x$ , we first replace  $a_{av-x}$  in Eq. (2.4) by  $a_x$ :

$$a_x = \frac{v_{2x} - v_{1x}}{t_2 - t_1} \quad (2.7)$$

Now we let  $t_1 = 0$  and let  $t_2$  be any later time  $t$ . We use the symbol  $v_{0x}$  for the *initial*  $x$ -velocity at time  $t = 0$ ; the  $x$ -velocity at the later time  $t$  is  $v_x$ . Then Eq. (2.7) becomes

$$a_x = \frac{v_x - v_{0x}}{t - 0} \quad \text{or}$$

$$v_x = v_{0x} + a_x t \quad (2.8)$$

x-velocity at time  $t$  of a particle with constant  $x$ -acceleration    
 x-velocity of the particle at time 0    
 Constant  $x$ -acceleration of the particle    
 Time

In Eq. (2.8) the term  $a_x t$  is the product of the constant rate of change of  $x$ -velocity,  $a_x$ , and the time interval  $t$ . Therefore it equals the *total* change in  $x$ -velocity from  $t = 0$  to time  $t$ . The  $x$ -velocity  $v_x$  at any time  $t$  then equals the initial  $x$ -velocity  $v_{0x}$  (at  $t = 0$ ) plus the change in  $x$ -velocity  $a_x t$  (Fig. 2.17).

Equation (2.8) also says that the change in  $x$ -velocity  $v_x - v_{0x}$  of the particle between  $t = 0$  and any later time  $t$  equals the *area* under the  $a_x$ - $t$  graph between those two times. You can verify this from Fig. 2.16: Under this graph is a rectangle of vertical side  $a_x$ , horizontal side  $t$ , and area  $a_x t$ . From Eq. (2.8) the area  $a_x t$  is indeed equal to the change in velocity  $v_x - v_{0x}$ . In Section 2.6 we'll show that even if the  $x$ -acceleration is not constant, the change in  $x$ -velocity during a time interval is still equal to the area under the  $a_x$ - $t$  curve, although then Eq. (2.8) does not apply.

Next we'll derive an equation for the position  $x$  as a function of time when the  $x$ -acceleration is constant. To do this, we use two different expressions for the average  $x$ -velocity  $v_{av-x}$  during the interval from  $t = 0$  to any later time  $t$ . The first expression comes from the definition of  $v_{av-x}$ , Eq. (2.2), which is true whether or not the acceleration is constant. The position at time  $t = 0$ , called the *initial position*, is  $x_0$ . The position at time  $t$  is simply  $x$ . Thus for the time interval  $\Delta t = t - 0$  the displacement is  $\Delta x = x - x_0$ , and Eq. (2.2) gives

$$v_{av-x} = \frac{x - x_0}{t} \quad (2.9)$$

To find a second expression for  $v_{av-x}$ , note that the  $x$ -velocity changes at a constant rate if the  $x$ -acceleration is constant. In this case the average  $x$ -velocity for the time interval from 0 to  $t$  is simply the average of the  $x$ -velocities at the beginning and end of the interval:

$$v_{av-x} = \frac{1}{2}(v_{0x} + v_x) \quad (\text{constant } x\text{-acceleration only}) \quad (2.10)$$

[Equation (2.10) is *not* true if the  $x$ -acceleration varies during the time interval.] We also know that with constant  $x$ -acceleration, the  $x$ -velocity  $v_x$  at any time  $t$  is given by Eq. (2.8). Substituting that expression for  $v_x$  into Eq. (2.10), we find

$$\begin{aligned} v_{av-x} &= \frac{1}{2}(v_{0x} + v_{0x} + a_x t) \\ &= v_{0x} + \frac{1}{2}a_x t \end{aligned} \quad (\text{constant } x\text{-acceleration only}) \quad (2.11)$$

Finally, we set Eqs. (2.9) and (2.11) equal to each other and simplify:

$$v_{0x} + \frac{1}{2}a_x t = \frac{x - x_0}{t} \quad \text{or}$$

Figure 2.16 An acceleration-time ( $a_x$ - $t$ ) graph of straight-line motion with constant positive  $x$ -acceleration  $a_x$ .


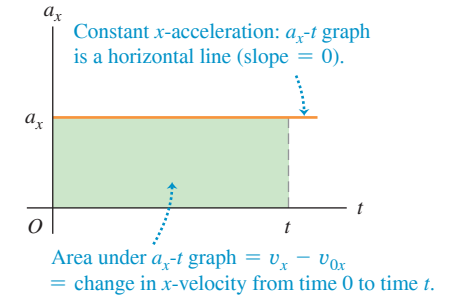


Figure 2.17 A velocity-time ( $v_x$ - $t$ ) graph of straight-line motion with constant positive  $x$ -acceleration  $a_x$ . The initial  $x$ -velocity  $v_{0x}$  is also positive in this case.



**BIO APPLICATION Testing Humans**

**at High Accelerations** In experiments carried out by the U.S. Air Force in the 1940s and 1950s, humans riding a rocket sled could withstand accelerations as great as  $440 \text{ m/s}^2$ . The first three photos in this sequence show Air Force physician John Stapp speeding up from rest to  $188 \text{ m/s}$  ( $678 \text{ km/h}$ ) in just  $5 \text{ s}$ . Photos 4–6 show the even greater magnitude of acceleration as the rocket sled braked to a halt.

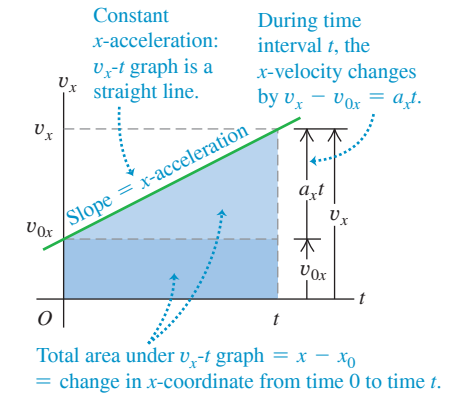

$$x = x_0 + v_{0x}t + \frac{1}{2}a_x t^2 \quad (2.12)$$

Position of the particle at time 0  $\rightarrow$   $x_0$   
 Position at time  $t$  of a particle with constant  $x$ -acceleration  $\rightarrow$   $x$   
 $x$ -velocity of the particle at time 0  $\rightarrow$   $v_{0x}t$   
 Constant  $x$ -acceleration of the particle  $\rightarrow$   $\frac{1}{2}a_x t^2$   
 Time  $\rightarrow$   $t$

Equation (2.12) tells us that the particle's position at time  $t$  is the sum of three terms: its initial position at  $t = 0$ ,  $x_0$ , plus the displacement  $v_{0x}t$  it would have if its  $x$ -velocity remained equal to its initial value, plus an additional displacement  $\frac{1}{2}a_x t^2$  caused by the change in  $x$ -velocity.

A graph of Eq. (2.12)—that is, an  $x$ - $t$  graph for motion with constant  $x$ -acceleration (**Fig. 2.18a**)—is always a *parabola*. Figure 2.18b shows such a graph. The curve intercepts the vertical axis ( $x$ -axis) at  $x_0$ , the position at  $t = 0$ . The slope of the tangent at  $t = 0$  equals  $v_{0x}$ , the initial  $x$ -velocity, and the slope of the tangent at any time  $t$  equals the  $x$ -velocity  $v_x$  at that time. The slope and  $x$ -velocity are continuously increasing, so the  $x$ -acceleration  $a_x$  is positive and the graph in Fig. 2.18b is concave up (it curves upward). If  $a_x$  is negative, the  $x$ - $t$  graph is a parabola that is concave down (has a downward curvature).

If there is zero  $x$ -acceleration, the  $x$ - $t$  graph is a straight line; if there is a constant  $x$ -acceleration, the additional  $\frac{1}{2}a_x t^2$  term in Eq. (2.12) for  $x$  as a function of  $t$  curves the graph into a parabola (**Fig. 2.19a**). Similarly, if there is zero  $x$ -acceleration, the  $v_x$ - $t$  graph is a horizontal line (the  $x$ -velocity is constant). Adding a constant  $x$ -acceleration in Eq. (2.8) gives a slope to the graph (Fig. 2.19b).

Here's another way to derive Eq. (2.12). Just as the change in  $x$ -velocity of the particle equals the area under the  $a_x$ - $t$  graph, the displacement (change in position) equals the area under the  $v_x$ - $t$  graph. So the displacement  $x - x_0$  of the particle between  $t = 0$  and any later time  $t$  equals the area under the  $v_x$ - $t$  graph between those times. In Fig. 2.17 we divide the area under the graph into a dark-colored rectangle (vertical side  $v_{0x}$ , horizontal side  $t$ , and area  $v_{0x}t$ ) and a light-colored right triangle (vertical side  $a_x t$ , horizontal side  $t$ , and area  $\frac{1}{2}(a_x t)(t) = \frac{1}{2}a_x t^2$ ). The total area under the  $v_x$ - $t$  graph is  $x - x_0 = v_{0x}t + \frac{1}{2}a_x t^2$ , in accord with Eq. (2.12).

It's often useful to have a relationship for position,  $x$ -velocity, and (constant)  $x$ -acceleration that does not involve time. To obtain this, we first solve Eq. (2.8) for  $t$  and then substitute the resulting expression into Eq. (2.12):

$$t = \frac{v_x - v_{0x}}{a_x}$$

$$x = x_0 + v_{0x} \left( \frac{v_x - v_{0x}}{a_x} \right) + \frac{1}{2}a_x \left( \frac{v_x - v_{0x}}{a_x} \right)^2$$


We transfer the term  $x_0$  to the left side, multiply through by  $2a_x$ , and simplify:

$$2a_x(x - x_0) = 2v_{0x}v_x - 2v_{0x}^2 + v_x^2 - 2v_{0x}v_x + v_{0x}^2$$

Figure 2.18 (a) Straight-line motion with constant acceleration. (b) A position-time ( $x$ - $t$ ) graph for this motion (the same motion as is shown in Figs. 2.15, 2.16, and 2.17). For this motion the initial position  $x_0$ , the initial velocity  $v_{0x}$ , and the acceleration  $a_x$  are all positive.

(a) A race car moves in the  $x$ -direction with constant acceleration.

(b) The  $x$ - $t$  graph

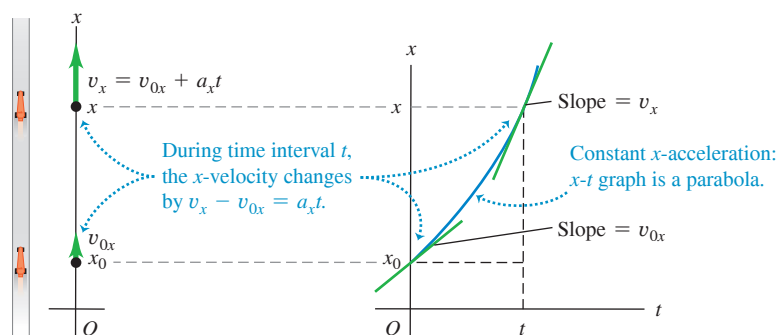

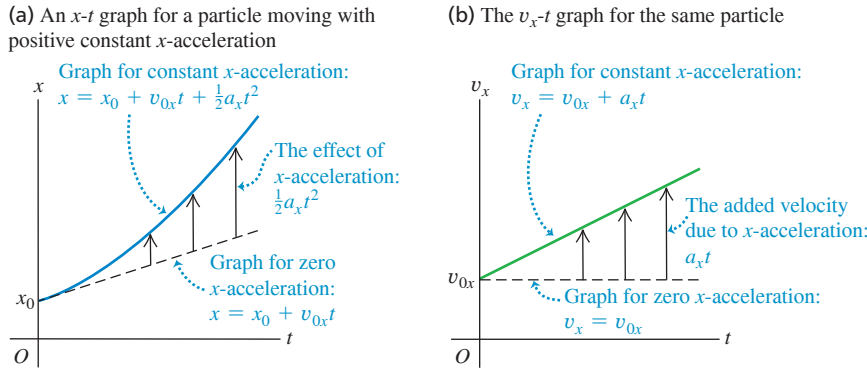


Figure 2.19 (a) How a constant  $x$ -acceleration affects a particle's (a)  $x$ - $t$  graph and (b)  $v_x$ - $t$  graph.

Finally,

$$v_x^2 = v_{0x}^2 + 2a_x(x - x_0) \quad (2.13)$$

$v_x^2$  is  $x$ -velocity at time  $t$  of a particle with constant  $x$ -acceleration.  
 $v_{0x}^2$  is  $x$ -velocity of the particle at time 0.  
 $2a_x$  is constant  $x$ -acceleration of the particle.  
 $(x - x_0)$  is the difference between Position of the particle at time  $t$  and Position of the particle at time 0.

We can get one more useful relationship by equating the two expressions for  $v_{av-x}$ , Eqs. (2.9) and (2.10), and multiplying through by  $t$ :

$$x - x_0 = \frac{1}{2}(v_{0x} + v_x)t \quad (2.14)$$

$x - x_0$  is Position at time  $t$  of a particle with constant  $x$ -acceleration minus Position of the particle at time 0.  
 $\frac{1}{2}(v_{0x} + v_x)t$  is the average of  $x$ -velocity of the particle at time 0 and  $x$ -velocity of the particle at time  $t$  multiplied by Time.

Note that Eq. (2.14) does not contain the  $x$ -acceleration  $a_x$ . This equation can be handy when  $a_x$  is constant but its value is unknown.

Equations (2.8), (2.12), (2.13), and (2.14) are the *equations of motion with constant acceleration* (Table 2.5). By using these equations, we can solve any problem involving straight-line motion of a particle with constant acceleration.

For the particular case of motion with constant  $x$ -acceleration depicted in Fig. 2.15 and graphed in Figs. 2.16, 2.17, and 2.18, the values of  $x_0$ ,  $v_{0x}$ , and  $a_x$  are all positive. We recommend that you redraw these figures for cases in which one, two, or all three of these quantities are negative.

TABLE 2.5 Equations of Motion with Constant Acceleration

Equation		Includes Quantities
$v_x = v_{0x} + a_x t$ (2.8)	$t$	$v_x$ $a_x$
$x = x_0 + v_{0x}t + \frac{1}{2}a_x t^2$ (2.12)	$t$ $x$	$a_x$
$v_x^2 = v_{0x}^2 + 2a_x(x - x_0)$ (2.13)	$x$	$v_x$ $a_x$
$x - x_0 = \frac{1}{2}(v_{0x} + v_x)t$ (2.14)	$t$ $x$	$v_x$

### PROBLEM-SOLVING STRATEGY 2.1 Motion with Constant Acceleration

**IDENTIFY** the relevant concepts: In most straight-line motion problems, you can use the constant-acceleration Equations (2.8), (2.12), (2.13), and (2.14). If you encounter a situation in which the acceleration isn't constant, you'll need a different approach (see Section 2.6).

**SET UP** the problem using the following steps:

1. Read the problem carefully. Make a motion diagram showing the location of the particle at the times of interest. Decide where to place the origin of coordinates and which axis direction is positive. It's often helpful to place the particle at the origin at time  $t = 0$ ; then  $x_0 = 0$ . Your choice of the positive axis direction automatically determines the positive directions for  $x$ -velocity and  $x$ -acceleration. If  $x$  is positive to the right of the origin, then  $v_x$  and  $a_x$  are also positive toward the right.

2. Identify the physical quantities (times, positions, velocities, and accelerations) that appear in Eqs. (2.8), (2.12), (2.13), and (2.14) and assign them appropriate symbols:  $t$ ,  $x$ ,  $x_0$ ,  $v_x$ ,  $v_{0x}$ , and  $a_x$ , or symbols related to those. Translate the prose into physics: "When does the particle arrive at its highest point?" means "What is the value of  $t$  when  $x$  has its maximum value?" In Example 2.4, "Where is he when his speed is 25 m/s?" means "What is the value of  $x$  when  $v_x = 25$  m/s?" Be alert for implicit information. For example, "A car sits at a stop light" usually means  $v_{0x} = 0$ .
3. List the quantities such as  $x$ ,  $x_0$ ,  $v_x$ ,  $v_{0x}$ ,  $a_x$ , and  $t$ . Some of them will be known and some will be unknown. Write down the values of the known quantities, and decide which of the unknowns are the target variables. Make note of the absence of any of the quantities that appear in the four constant-acceleration equations.

Continued

- Use Table 2.5 to identify the applicable equations. (These are often the equations that don't include any of the absent quantities that you identified in step 3.) Usually you'll find a single equation that contains only one of the target variables. Sometimes you must find two equations, each containing the same two unknowns.
- Sketch graphs corresponding to the applicable equations. The  $v_x$ - $t$  graph of Eq. (2.8) is a straight line with slope  $a_x$ . The  $x$ - $t$  graph of Eq. (2.12) is a parabola that's concave up if  $a_x$  is positive and concave down if  $a_x$  is negative.
- On the basis of your experience with such problems, and taking account of what your sketched graphs tell you, make any qualitative and quantitative predictions you can about the solution.

**EXECUTE** *the solution:* If a single equation applies, solve it for the target variable, *using symbols only*; then substitute the known values and calculate the value of the target variable. If you have two equations in two unknowns, solve them simultaneously for the target variables.

**EVALUATE** *your answer:* Take a hard look at your results to see whether they make sense. Are they within the general range of values that you expected?

### EXAMPLE 2.4 Constant-acceleration calculations

A motorcyclist heading east through a small town accelerates at a constant  $4.0 \text{ m/s}^2$  after he leaves the city limits (**Fig. 2.20**). At time  $t = 0$  he is  $5.0 \text{ m}$  east of the city-limits signpost while he moves east at  $15 \text{ m/s}$ . (a) Find his position and velocity at  $t = 2.0 \text{ s}$ . (b) Where is he when his speed is  $25 \text{ m/s}$ ?

**IDENTIFY and SET UP** The  $x$ -acceleration is constant, so we can use the constant-acceleration equations. We take the signpost as the origin of coordinates ( $x = 0$ ) and choose the positive  $x$ -axis to point east (see Fig. 2.20, which is also a motion diagram). The known variables are the initial position and velocity,  $x_0 = 5.0 \text{ m}$  and  $v_{0x} = 15 \text{ m/s}$ , and the acceleration,  $a_x = 4.0 \text{ m/s}^2$ . The unknown target variables in part (a) are the values of the position  $x$  and the  $x$ -velocity  $v_x$  at  $t = 2.0 \text{ s}$ ; the target variable in part (b) is the value of  $x$  when  $v_x = 25 \text{ m/s}$ .

**EXECUTE** (a) Since we know the values of  $x_0$ ,  $v_{0x}$ , and  $a_x$ , Table 2.5 tells us that we can find the position  $x$  at  $t = 2.0 \text{ s}$  by using

Eq. (2.12) and the  $x$ -velocity  $v_x$  at this time by using Eq. (2.8):

$$\begin{aligned} x &= x_0 + v_{0x}t + \frac{1}{2}a_x t^2 \\ &= 5.0 \text{ m} + (15 \text{ m/s})(2.0 \text{ s}) + \frac{1}{2}(4.0 \text{ m/s}^2)(2.0 \text{ s})^2 = 43 \text{ m} \\ v_x &= v_{0x} + a_x t \\ &= 15 \text{ m/s} + (4.0 \text{ m/s}^2)(2.0 \text{ s}) = 23 \text{ m/s} \end{aligned}$$

(b) We want to find the value of  $x$  when  $v_x = 25 \text{ m/s}$ , but we don't know the time when the motorcycle has this velocity. Table 2.5 tells us that we should use Eq. (2.13), which involves  $x$ ,  $v_x$ , and  $a_x$  but does *not* involve  $t$ :

$$v_x^2 = v_{0x}^2 + 2a_x(x - x_0)$$


Solving for  $x$  and substituting the known values, we find

$$\begin{aligned} x &= x_0 + \frac{v_x^2 - v_{0x}^2}{2a_x} \\ &= 5.0 \text{ m} + \frac{(25 \text{ m/s})^2 - (15 \text{ m/s})^2}{2(4.0 \text{ m/s}^2)} = 55 \text{ m} \end{aligned}$$

**EVALUATE** You can check the result in part (b) by first using Eq. (2.8),  $v_x = v_{0x} + a_x t$ , to find the time at which  $v_x = 25 \text{ m/s}$ , which turns out to be  $t = 2.5 \text{ s}$ . You can then use Eq. (2.12),  $x = x_0 + v_{0x}t + \frac{1}{2}a_x t^2$ , to solve for  $x$ . You should find  $x = 55 \text{ m}$ , the same answer as above. That's the long way to solve the problem, though. The method we used in part (b) is much more efficient.

**KEYCONCEPT** By using one or more of the four equations in Table 2.5, you can solve any problem involving straight-line motion with constant acceleration.

Figure 2.20 A motorcyclist traveling with constant acceleration.

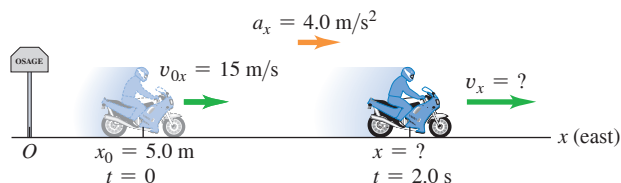

### EXAMPLE 2.5 Two objects with different accelerations

### WITH VARIATION PROBLEMS

A motorist traveling at a constant  $15 \text{ m/s}$  ( $54 \text{ km/h}$ ) passes a school crossing where the speed limit is  $10 \text{ m/s}$  ( $36 \text{ km/h}$ ). Just as the motorist passes the school-crossing sign, a police officer on a motorcycle stopped there starts in pursuit with constant acceleration  $3.0 \text{ m/s}^2$  (**Fig. 2.21a**). (a) How much time elapses before the officer passes the motorist? At that time, (b) what is the officer's speed and (c) how far has each vehicle traveled?

**IDENTIFY and SET UP** Both the officer and the motorist move with constant acceleration (equal to zero for the motorist), so we can use the constant-acceleration formulas. We take the origin at the sign, so  $x_0 = 0$

for both, and we take the positive direction to the right. Let  $x_P$  and  $x_M$  represent the positions of the police officer and the motorist at any time. Their initial velocities are  $v_{P0x} = 0$  and  $v_{M0x} = 15 \text{ m/s}$ , and their accelerations are  $a_{Px} = 3.0 \text{ m/s}^2$  and  $a_{Mx} = 0$ . Our target variable in part (a) is the time when the officer and motorist are at the same position  $x$ ; Table 2.5 tells us that Eq. (2.12) is useful for this part. In part (b) we'll use Eq. (2.8) to find the officer's speed  $v$  (the magnitude of her velocity) at the time found in part (a). In part (c) we'll use Eq. (2.12) again to find the position of either vehicle at this same time.

Figure 2.21 (a) Motion with constant acceleration overtaking motion with constant velocity. (b) A graph of  $x$  versus  $t$  for each vehicle.

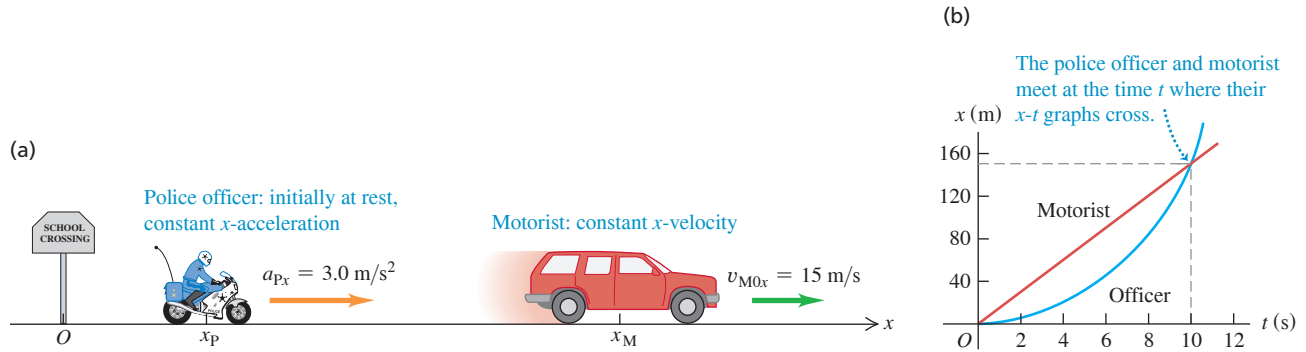


Figure 2.21b shows an  $x-t$  graph for both vehicles. The straight line represents the motorist's motion,  $x_M = x_{M0} + v_{M0x}t = v_{M0x}t$ . The graph for the officer's motion is the right half of a parabola with upward curvature:

$$x_P = x_{P0} + v_{P0x}t + \frac{1}{2}a_{Px}t^2 = \frac{1}{2}a_{Px}t^2$$

A good sketch shows that the officer and motorist are at the same position ( $x_P = x_M$ ) at about  $t = 10$  s, at which time both have traveled about 150 m from the sign.

**EXECUTE** (a) To find the value of the time  $t$  at which the motorist and police officer are at the same position, we set  $x_P = x_M$  by equating the expressions above and solving that equation for  $t$ :

$$v_{M0x}t = \frac{1}{2}a_{Px}t^2$$

$$t = 0 \quad \text{or} \quad t = \frac{2v_{M0x}}{a_{Px}} = \frac{2(15 \text{ m/s})}{3.0 \text{ m/s}^2} = 10 \text{ s}$$

Both vehicles have the same  $x$ -coordinate at *two* times, as Fig. 2.21b indicates. At  $t = 0$  the motorist passes the officer; at  $t = 10$  s the officer passes the motorist.

(b) We want the magnitude of the officer's  $x$ -velocity  $v_{Px}$  at the time  $t$  found in part (a). Substituting the values of  $v_{P0x}$  and  $a_{Px}$  into Eq. (2.8) along with  $t = 10$  s from part (a), we find

$$v_{Px} = v_{P0x} + a_{Px}t = 0 + (3.0 \text{ m/s}^2)(10 \text{ s}) = 30 \text{ m/s}$$

The officer's speed is the absolute value of this, which is also 30 m/s.

(c) In 10 s the motorist travels a distance

$$x_M = v_{M0x}t = (15 \text{ m/s})(10 \text{ s}) = 150 \text{ m}$$

and the officer travels

$$x_P = \frac{1}{2}a_{Px}t^2 = \frac{1}{2}(3.0 \text{ m/s}^2)(10 \text{ s})^2 = 150 \text{ m}$$


This verifies that they have gone equal distances after 10 s.

**EVALUATE** Our results in parts (a) and (c) agree with our estimates from our sketch. Note that when the officer passes the motorist, they do *not* have the same velocity: The motorist is moving at 15 m/s and the officer is moving at 30 m/s. You can also see this from Fig. 2.21b. Where the two  $x-t$  curves cross, their slopes (equal to the values of  $v_x$  for the two vehicles) are different.

Is it just coincidence that when the two vehicles are at the same position, the officer is going twice the speed of the motorist? Equation (2.14),  $x - x_0 = \frac{1}{2}(v_{0x} + v_x)t$ , gives the answer. The motorist has constant velocity, so  $v_{M0x} = v_{Mx}$ , and the motorist's displacement  $x - x_0$  in time  $t$  is  $v_{M0x}t$ . Because  $v_{P0x} = 0$ , in the same time  $t$  the officer's displacement is  $\frac{1}{2}v_{Px}t$ . The two vehicles have the same displacement in the same amount of time, so  $v_{M0x}t = \frac{1}{2}v_{Px}t$  and  $v_{Px} = 2v_{M0x}$ —that is, the officer has exactly twice the motorist's velocity. This is true no matter what the value of the officer's acceleration.


**KEYCONCEPT** In straight-line motion, one object meets or passes another at the time when the two objects have the same coordinate  $x$  (and so their  $x-t$  graphs cross). The objects can have different velocities at that time.

**TEST YOUR UNDERSTANDING OF SECTION 2.4** Four possible  $v_x-t$  graphs are shown for the two vehicles in Example 2.5. Which graph is correct?

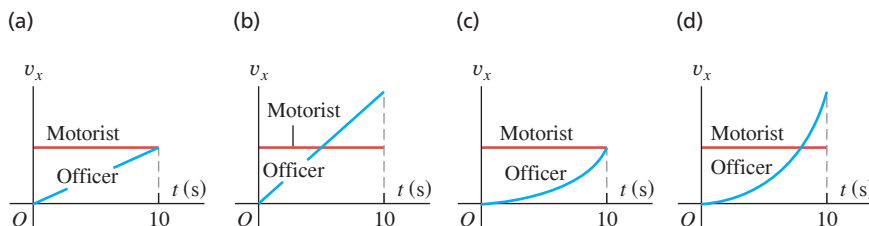

**ANSWER** (b) The officer's  $x$ -acceleration is constant, so her  $v_x-t$  graph is a straight line. The motorcycle is moving faster than the car when the two vehicles meet at  $t = 10$  s.

Figure 2.22 Multiflash photo of a freely falling ball.

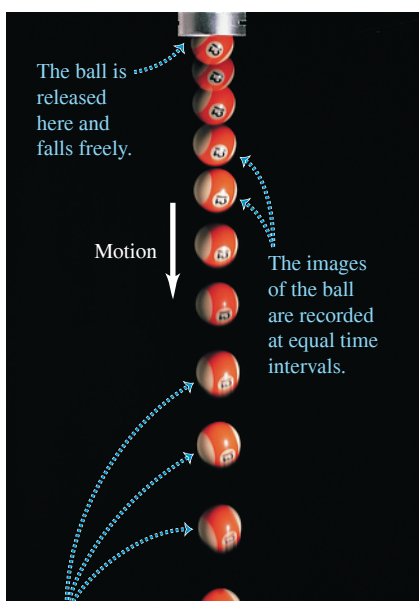

- The average velocity in each time interval is proportional to the distance between images.
- This distance continuously increases, so the ball's velocity is continuously changing; the ball is accelerating downward.

**CAUTION** Don't confuse speed, velocity, and acceleration in free fall Speed can never be negative; velocity can be positive or negative, depending on the direction of motion. In free fall, speed and velocity change continuously but acceleration (the rate of change of velocity) is constant and downward. |

## 2.5 FREELY FALLING OBJECTS

The most familiar example of motion with (nearly) constant acceleration is an object falling under the influence of the earth's gravitational attraction. Such motion has held the attention of philosophers and scientists since ancient times. In the fourth century B.C., Aristotle thought (erroneously) that heavy objects fall faster than light objects, in proportion to their weight. Nineteen centuries later, Galileo (see Section 1.1) argued that an object should fall with a downward acceleration that is constant and independent of its weight.

Experiment shows that if the effects of the air can be ignored, Galileo is right; all objects at a particular location fall with the same downward acceleration, regardless of their size or weight. If in addition the distance of the fall is small compared with the radius of the earth, and if we ignore small effects due to the earth's rotation, the acceleration is constant. The idealized motion that results under all of these assumptions is called **free fall**, although it includes rising as well as falling motion. (In Chapter 3 we'll extend the discussion of free fall to include the motion of projectiles, which move both vertically and horizontally.)

Figure 2.22 is a photograph of a falling ball made with a stroboscopic light source that produces a series of short, intense flashes at equal time intervals. As each flash occurs, an image of the ball at that instant is recorded on the photograph. The increasing spacing between successive images in Fig. 2.22 indicates that the ball is accelerating downward. Careful measurement shows that the velocity change is the same in each time interval, so the acceleration of the freely falling ball is constant.

The constant acceleration of a freely falling object is called the **acceleration due to gravity**, and we denote its magnitude with the letter  $g$ . We'll frequently use the approximate value of  $g$  at or near the earth's surface:

$$g = 9.80 \text{ m/s}^2 \quad (\text{approximate value near the earth's surface})$$

The exact value varies with location, so we'll often give the value of  $g$  at the earth's surface to only two significant figures as  $9.8 \text{ m/s}^2$ . On the moon's surface, the acceleration due to gravity is caused by the attractive force of the moon rather than the earth, and  $g = 1.6 \text{ m/s}^2$ . Near the surface of the sun,  $g = 270 \text{ m/s}^2$ .

**CAUTION**  $g$  is always a positive number Because  $g$  is the *magnitude* of a vector quantity, it is always a *positive* number. If you take the positive  $y$ -direction to be upward, as we do in most situations involving free fall, the  $y$ -component of the acceleration is negative and equal to  $-g$ . Be careful with the sign of  $g$ , or you'll have trouble with free-fall problems. |

In the following examples we use the constant-acceleration equations developed in Section 2.4. Review Problem-Solving Strategy 2.1 in that section before you study the next examples.

### EXAMPLE 2.6 A freely falling coin

A one-euro coin is dropped from the Leaning Tower of Pisa and falls freely from rest. What are its position and velocity after 1.0 s, 2.0 s, and 3.0 s? Ignore air resistance.

**IDENTIFY and SET UP** "Falls freely" means "falls with constant acceleration due to gravity," so we can use the constant-acceleration equations. The right side of Fig. 2.23 shows our motion diagram for the coin. The motion is vertical, so we use a vertical coordinate axis and call the coordinate  $y$  instead of  $x$ . We take the origin at the starting point and the *upward* direction as positive. Both the initial coordinate  $y_0$  and initial  $y$ -velocity  $v_{0y}$  are zero. The  $y$ -acceleration is downward (in the negative  $y$ -direction), so  $a_y = -g = -9.8 \text{ m/s}^2$ . (Remember

that  $g$  is a positive quantity.) Our target variables are the values of  $y$  and  $v_y$  at the three given times. To find these, we use Eqs. (2.12) and (2.8) with  $x$  replaced by  $y$ . Our choice of the upward direction as positive means that all positions and velocities we calculate will be negative.


**EXECUTE** At a time  $t$  after the coin is dropped, its position and  $y$ -velocity are

$$y = y_0 + v_{0y}t + \frac{1}{2}a_y t^2 = 0 + 0 + \frac{1}{2}(-g)t^2 = (-4.9 \text{ m/s}^2)t^2$$

$$v_y = v_{0y} + a_y t = 0 + (-g)t = (-9.8 \text{ m/s}^2)t$$



Figure 2.23 A coin freely falling from rest.

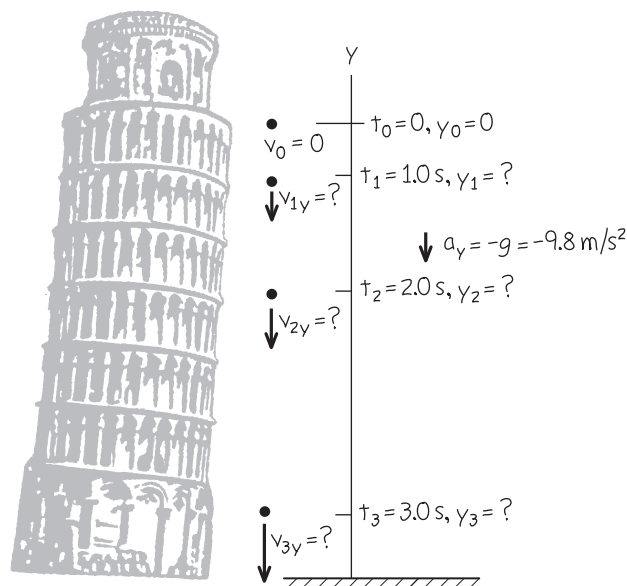

When  $t = 1.0 \text{ s}$ ,  $y = (-4.9 \text{ m/s}^2)(1.0 \text{ s})^2 = -4.9 \text{ m}$  and  $v_y = (-9.8 \text{ m/s}^2)(1.0 \text{ s}) = -9.8 \text{ m/s}$ ; after 1.0 s, the coin is 4.9 m below the origin ( $y$  is negative) and has a downward velocity ( $v_y$  is negative) with magnitude 9.8 m/s.

We can find the positions and  $y$ -velocities at 2.0 s and 3.0 s in the same way. The results are  $y = -20 \text{ m}$  and  $v_y = -20 \text{ m/s}$  at  $t = 2.0 \text{ s}$ , and  $y = -44 \text{ m}$  and  $v_y = -29 \text{ m/s}$  at  $t = 3.0 \text{ s}$ .

**EVALUATE** All our answers are negative, as we expected. If we had chosen the positive  $y$ -axis to point downward, the acceleration would have been  $a_y = +g$  and all our answers would have been positive.

**KEYCONCEPT** By using one or more of the four equations in Table 2.5 with  $x$  replaced by  $y$ , the positive  $y$ -direction chosen to be upward, and acceleration  $a_y = -g$ , you can solve any free-fall problem.

### EXAMPLE 2.7 Up-and-down motion in free fall

### WITH VARIATION PROBLEMS

You throw a ball vertically upward from the roof of a tall building. The ball leaves your hand at a point even with the roof railing with an upward speed of 15.0 m/s; the ball is then in free fall. (We ignore air resistance.) On its way back down, it just misses the railing. Find (a) the ball's position and velocity 1.00 s and 4.00 s after leaving your hand; (b) the ball's velocity when it is 5.00 m above the railing; (c) the maximum height reached; (d) the ball's acceleration when it is at its maximum height.

**IDENTIFY and SET UP** The words "in free fall" mean that the acceleration is due to gravity, which is constant. Our target variables are position [in parts (a) and (c)], velocity [in parts (a) and (b)], and acceleration [in part (d)]. We take the origin at the point where the ball leaves your hand, and take the positive direction to be upward (Fig. 2.24). The initial position  $y_0$  is zero, the initial  $y$ -velocity  $v_{0y}$  is +15.0 m/s, and the  $y$ -acceleration is  $a_y = -g = -9.80 \text{ m/s}^2$ . In part (a), as in Example 2.6, we'll use Eqs. (2.12) and (2.8) to find the position and velocity as functions of time. In part (b) we must find the velocity at a given *position* (no time is given), so we'll use Eq. (2.13).


**Figure 2.25** (next page) shows the  $y$ - $t$  and  $v_y$ - $t$  graphs for the ball. The  $y$ - $t$  graph is a concave-down parabola that rises and then falls, and the  $v_y$ - $t$  graph is a downward-sloping straight line. Note that the ball's velocity is zero when it is at its highest point.

**EXECUTE** (a) The position and  $y$ -velocity at time  $t$  are given by Eqs. (2.12) and (2.8) with  $x$ 's replaced by  $y$ 's:

$$\begin{aligned} y &= y_0 + v_{0y}t + \frac{1}{2}a_y t^2 = y_0 + v_{0y}t + \frac{1}{2}(-g)t^2 \\ &= (0) + (15.0 \text{ m/s})t + \frac{1}{2}(-9.80 \text{ m/s}^2)t^2 \\ v_y &= v_{0y} + a_y t = v_{0y} + (-g)t \\ &= 15.0 \text{ m/s} + (-9.80 \text{ m/s}^2)t \end{aligned}$$

When  $t = 1.00 \text{ s}$ , these equations give  $y = +10.1 \text{ m}$  and  $v_y = +5.2 \text{ m/s}$ . That is, the ball is 10.1 m above the origin ( $y$  is positive) and


Figure 2.24 Position and velocity of a ball thrown vertically upward.

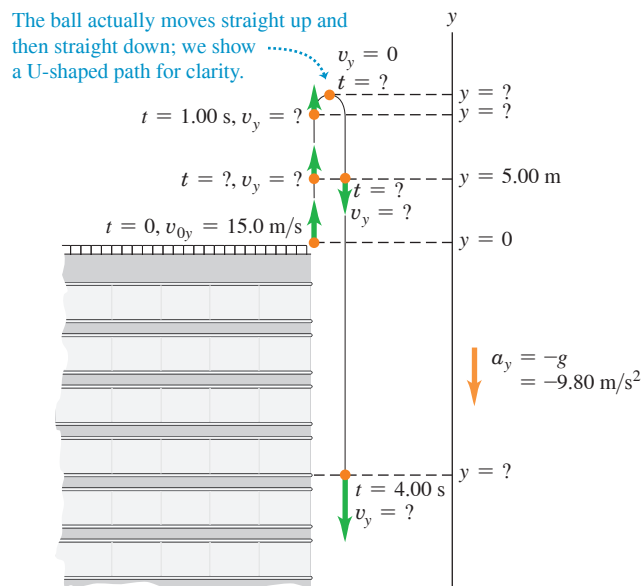

moving upward ( $v_y$  is positive) with a speed of 5.2 m/s. This is less than the initial speed because the ball slows as it ascends. When  $t = 4.00 \text{ s}$ , those equations give  $y = -18.4 \text{ m}$  and  $v_y = -24.2 \text{ m/s}$ . The ball has passed its highest point and is 18.4 m below the origin ( $y$  is negative). It is moving downward ( $v_y$  is negative) with a speed of 24.2 m/s.

*Continued*

Figure 2.25 (a) Position and (b) velocity as functions of time for a ball thrown upward with an initial speed of 15.0 m/s.

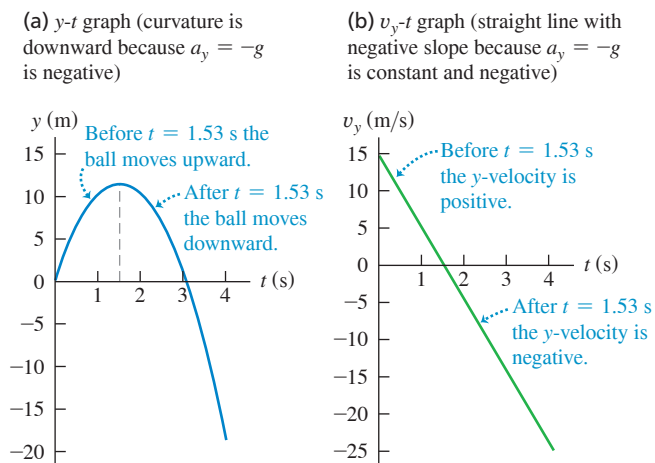

(b) The  $y$ -velocity at any position  $y$  is given by Eq. (2.13) with  $x$ 's replaced by  $y$ 's:

$$\begin{aligned} v_y^2 &= v_{0y}^2 + 2a_y(y - y_0) = v_{0y}^2 + 2(-g)(y - 0) \\ &= (15.0 \text{ m/s})^2 + 2(-9.80 \text{ m/s}^2)y \end{aligned}$$

When the ball is 5.00 m above the origin we have  $y = +5.00$  m, so

$$\begin{aligned} v_y^2 &= (15.0 \text{ m/s})^2 + 2(-9.80 \text{ m/s}^2)(5.00 \text{ m}) = 127 \text{ m}^2/\text{s}^2 \\ v_y &= \pm 11.3 \text{ m/s} \end{aligned}$$

We get *two* values of  $v_y$  because the ball passes through the point  $y = +5.00$  m twice, once on the way up (so  $v_y$  is positive) and once on the way down (so  $v_y$  is negative) (see Fig. 2.24). Note that the speed of the ball is 11.3 m/s each time it passes through this point.

(c) At the instant at which the ball reaches its maximum height  $y_1$ , its  $y$ -velocity is momentarily zero:  $v_y = 0$ . We use Eq. (2.13) to find  $y_1$ . With  $v_y = 0$ ,  $y_0 = 0$ , and  $a_y = -g$ , we get

$$\begin{aligned} 0 &= v_{0y}^2 + 2(-g)(y_1 - 0) \\ y_1 &= \frac{v_{0y}^2}{2g} = \frac{(15.0 \text{ m/s})^2}{2(9.80 \text{ m/s}^2)} = +11.5 \text{ m} \end{aligned}$$

(d) **CAUTION A free-fall misconception** It's a common misconception that at the highest point of free-fall motion, where the velocity is zero, the acceleration is also zero. If this were so, once the ball reached the highest point it would hang there suspended in midair! Remember that acceleration is the rate of change of velocity, and the ball's velocity is continuously changing. At every point, including the highest point, and at any velocity, including zero, the acceleration in free fall is always  $a_y = -g = -9.80 \text{ m/s}^2$ .

**EVALUATE** A useful way to check any free-fall problem is to draw the  $y$ - $t$  and  $v_y$ - $t$  graphs, as we did in Fig. 2.25. Note that these are graphs of Eqs. (2.12) and (2.8), respectively. Given the initial position, initial velocity, and acceleration, you can easily create these graphs by using a graphing calculator app or an online math program.

**KEYCONCEPT** If a freely falling object passes a given point at two different times, once moving upward and once moving downward, its speed will be the same at both times.

## EXAMPLE 2.8 Two solutions or one?

## WITH VARIATION PROBLEMS

At what time after being released has the ball in Example 2.7 fallen 5.00 m below the roof railing?

**IDENTIFY and SET UP** We treat this as in Example 2.7, so  $y_0$ ,  $v_{0y}$ , and  $a_y = -g$  have the same values as there. Now, however, the target variable is the time at which the ball is at  $y = -5.00$  m. The best equation to use is Eq. (2.12) with  $a_y$  replaced by  $-g$ , which gives the position  $y$  as a function of time  $t$ :

$$y = y_0 + v_{0y}t + \frac{1}{2}(-g)t^2$$

This is a *quadratic* equation for  $t$ , which we want to solve for the value of  $t$  when  $y = -5.00$  m.

**EXECUTE** We rearrange the equation so that it has the standard form of a quadratic equation for an unknown  $x$ ,  $Ax^2 + Bx + C = 0$ :

$$\left(\frac{1}{2}g\right)t^2 + (-v_{0y})t + (y - y_0) = At^2 + Bt + C = 0$$

By comparison, we identify  $A = \frac{1}{2}g$ ,  $B = -v_{0y}$ , and  $C = y - y_0$ . The quadratic formula (see Appendix D) tells us that this equation has *two* solutions:

$$\begin{aligned} t &= \frac{-B \pm \sqrt{B^2 - 4AC}}{2A} \\ &= \frac{-(-v_{0y}) \pm \sqrt{(-v_{0y})^2 - 4\left(\frac{1}{2}g\right)(y - y_0)}}{2\left(\frac{1}{2}g\right)} \\ &= \frac{v_{0y} \pm \sqrt{v_{0y}^2 - 2g(y - y_0)}}{g} \end{aligned}$$

Substituting the values  $y_0 = 0$ ,  $v_{0y} = +15.0$  m/s,  $g = 9.80 \text{ m/s}^2$ , and  $y = -5.00$  m, we find

$$t = \frac{(15.0 \text{ m/s}) \pm \sqrt{(15.0 \text{ m/s})^2 - 2(9.80 \text{ m/s}^2)(-5.00 \text{ m} - 0)}}{9.80 \text{ m/s}^2}$$

You can confirm that the numerical answers are  $t = +3.36$  s and  $t = -0.30$  s. The answer  $t = -0.30$  s doesn't make physical sense, since it refers to a time *before* the ball left your hand at  $t = 0$ . So the correct answer is  $t = +3.36$  s.

**EVALUATE** Why did we get a second, fictitious solution? The explanation is that constant-acceleration equations like Eq. (2.12) are based on the assumption that the acceleration is constant for *all* values of time, whether positive, negative, or zero. Hence the solution  $t = -0.30$  s refers to an imaginary moment when a freely falling ball was 5.00 m below the roof railing and rising to meet your hand. Since the ball didn't leave your hand and go into free fall until  $t = 0$ , this result is pure fiction.

Repeat these calculations to find the times when the ball is 5.00 m *above* the origin ( $y = +5.00$  m). The two answers are  $t = +0.38$  s and  $t = +2.68$  s. Both are positive values of  $t$ , and both refer to the real motion of the ball after leaving your hand. At the earlier time the ball passes through  $y = +5.00$  m moving upward; at the later time it passes through this point moving downward. [Compare this with part (b) of Example 2.7, and again refer to Fig. 2.25a.]

You should also solve for the times when  $y = +15.0$  m. In this case, both solutions involve the square root of a negative number, so there are *no* real solutions. Again Fig. 2.25a shows why; we found in part

(c) of Example 2.7 that the ball’s maximum height is  $y = +11.5$  m, so it *never* reaches  $y = +15.0$  m. While a quadratic equation such as Eq. (2.12) always has two solutions, in some situations one or both of the solutions aren’t physically reasonable.

In this example we encountered a quadratic equation for the case of free fall. But Eq. (2.12) is a quadratic equation that applies to *all* cases of straight-line motion with constant acceleration, so you’ll

need to exercise the same care in solving many problems of this kind.

**KEYCONCEPT** When the acceleration of an object is constant, its position as a function of time is given by a quadratic equation. Inspect the solutions to this equation to determine what they tell you about the problem you’re solving.

**TEST YOUR UNDERSTANDING OF SECTION 2.5** If you toss a ball upward with a certain initial speed, it falls freely and reaches a maximum height  $h$  a time  $t$  after it leaves your hand. (a) If you throw the ball upward with double the initial speed, what new maximum height does the ball reach? (i)  $h\sqrt{2}$ ; (ii)  $2h$ ; (iii)  $4h$ ; (iv)  $8h$ ; (v)  $16h$ . (b) If you throw the ball upward with double the initial speed, how long does it take to reach its new maximum height? (i)  $t/2$ ; (ii)  $t/\sqrt{2}$ ; (iii)  $t$ ; (iv)  $t\sqrt{2}$ ; (v)  $2t$ .

**ANSWER** (a) (iii) Use Eq. (2.13) with  $x$  replaced by  $y$  and  $a_y = -g$ ;  $v_y^2 = v_0^2 - 2g(y - y_0)$ . The starting height is  $y_0 = 0$  and the  $y$ -velocity at the maximum height  $y = h$  is  $v_y = 0$ , so  $0 = v_0^2 - 2gh$  and  $h = v_0^2/2g$ . If the initial  $y$ -velocity is increased by a factor of 2, the maximum height increases by a factor of  $2^2 = 4$  and the ball goes to height  $4h$ . (b) Use Eq. (2.8) with  $x$  replaced by  $y$  and  $a_y = -g$ ;  $v_y = v_0 - gt$ . The  $y$ -velocity at the maximum height is  $v_y = 0$ , so  $0 = v_0 - gt$  and  $t = v_0/g$ . If the initial  $y$ -velocity is increased by a factor of 2 and becomes  $2v_0$ , the maximum height increases by a factor of 2 and becomes  $2t$ .

## 2.6 VELOCITY AND POSITION BY INTEGRATION

This section is intended for students who have already learned a little integral calculus. In Section 2.4 we analyzed the special case of straight-line motion with constant acceleration. When  $a_x$  is not constant, as is frequently the case, the equations that we derived in that section are no longer valid (**Fig. 2.26**). But even when  $a_x$  varies with time, we can still use the relationship  $v_x = dx/dt$  to find the  $x$ -velocity  $v_x$  as a function of time if the position  $x$  is a known function of time. And we can still use  $a_x = dv_x/dt$  to find the  $x$ -acceleration  $a_x$  as a function of time if the  $x$ -velocity  $v_x$  is a known function of time.

In many situations, however, position and velocity are not known functions of time, while acceleration is (**Fig. 2.27**). How can we find the position and velocity in straight-line motion from the acceleration function  $a_x(t)$ ?


**Figure 2.26** When you push a car’s accelerator pedal to the floorboard, the resulting acceleration is *not* constant: The greater the car’s speed, the more slowly it gains additional speed. A typical car takes twice as long to accelerate from 50 km/h to 100 km/h as it does to accelerate from 0 to 50 km/h.



**Figure 2.27** The inertial navigation system (INS) on board a long-range airliner keeps track of the airliner’s acceleration. Given the airliner’s initial position and velocity before takeoff, the INS uses the acceleration data to calculate the airliner’s position and velocity throughout the flight.



Figure 2.28 An  $a_x$ - $t$  graph for a particle whose  $x$ -acceleration is not constant.

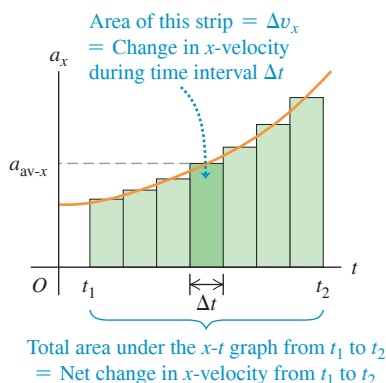

**Figure 2.28** is a graph of  $x$ -acceleration versus time for a particle whose acceleration is not constant. We can divide the time interval between times  $t_1$  and  $t_2$  into many smaller subintervals, calling a typical one  $\Delta t$ . Let the average  $x$ -acceleration during  $\Delta t$  be  $a_{\text{av-}x}$ . From Eq. (2.4) the change in  $x$ -velocity  $\Delta v_x$  during  $\Delta t$  is

$$\Delta v_x = a_{\text{av-}x} \Delta t$$

Graphically,  $\Delta v_x$  equals the area of the shaded strip with height  $a_{\text{av-}x}$  and width  $\Delta t$ —that is, the area under the curve between the left and right sides of  $\Delta t$ . The total change in  $x$ -velocity from  $t_1$  to  $t_2$  is the sum of the  $x$ -velocity changes  $\Delta v_x$  in the small subintervals. So the total  $x$ -velocity change is represented graphically by the *total* area under the  $a_x$ - $t$  curve between the vertical lines  $t_1$  and  $t_2$ . (In Section 2.4 we showed this for the special case in which  $a_x$  is constant.)

In the limit that all the  $\Delta t$ 's become very small and they become very large in number, the value of  $a_{\text{av-}x}$  for the interval from any time  $t$  to  $t + \Delta t$  approaches the instantaneous  $x$ -acceleration  $a_x$  at time  $t$ . In this limit, the area under the  $a_x$ - $t$  curve is the *integral* of  $a_x$  (which is in general a function of  $t$ ) from  $t_1$  to  $t_2$ . If  $v_{1x}$  is the  $x$ -velocity of the particle at time  $t_1$  and  $v_{2x}$  is the velocity at time  $t_2$ , then

$$v_{2x} - v_{1x} = \int_{v_{1x}}^{v_{2x}} dv_x = \int_{t_1}^{t_2} a_x dt \quad (2.15)$$

The change in the  $x$ -velocity  $v_x$  is the time integral of the  $x$ -acceleration  $a_x$ .

We can carry out exactly the same procedure with the curve of  $x$ -velocity versus time. If  $x_1$  is a particle's position at time  $t_1$  and  $x_2$  is its position at time  $t_2$ , from Eq. (2.2) the displacement  $\Delta x$  during a small time interval  $\Delta t$  is equal to  $v_{\text{av-}x} \Delta t$ , where  $v_{\text{av-}x}$  is the average  $x$ -velocity during  $\Delta t$ . The total displacement  $x_2 - x_1$  during the interval  $t_2 - t_1$  is given by

$$x_2 - x_1 = \int_{x_1}^{x_2} dx = \int_{t_1}^{t_2} v_x dt \quad (2.16)$$

The change in position  $x$ —that is, the displacement—is the time integral of  $x$ -velocity  $v_x$ . Graphically, the displacement between times  $t_1$  and  $t_2$  is the area under the  $v_x$ - $t$  curve between those two times. [This is the same result that we obtained in Section 2.4 for the special case in which  $v_x$  is given by Eq. (2.8).]

If  $t_1 = 0$  and  $t_2$  is any later time  $t$ , and if  $x_0$  and  $v_{0x}$  are the position and velocity, respectively, at time  $t = 0$ , then we can rewrite Eqs. (2.15) and (2.16) as

$$v_x = v_{0x} + \int_0^t a_x dt \quad (2.17)$$

Integral of the  $x$ -acceleration of the particle from time 0 to time  $t$

$$x = x_0 + \int_0^t v_x dt \quad (2.18)$$

Integral of the  $x$ -velocity of the particle from time 0 to time  $t$

If we know the  $x$ -acceleration  $a_x$  as a function of time and we know the initial velocity  $v_{0x}$ , we can use Eq. (2.17) to find the  $x$ -velocity  $v_x$  at any time; that is, we can find  $v_x$  as a function of time. Once we know this function, and given the initial position  $x_0$ , we can use Eq. (2.18) to find the position  $x$  at any time.

**EXAMPLE 2.9** Motion with changing acceleration

Sally is driving along a straight road. At  $t = 0$ , when she is moving at 10 m/s in the positive  $x$ -direction, she passes a signpost at  $x = 50$  m. Her  $x$ -acceleration as a function of time is

$$a_x = 2.0 \text{ m/s}^2 - (0.10 \text{ m/s}^3)t$$

(a) Find her  $x$ -velocity  $v_x$  and position  $x$  as functions of time. (b) When is her  $x$ -velocity greatest? (c) What is that maximum  $x$ -velocity? (d) Where is the car when it reaches that maximum  $x$ -velocity?

**IDENTIFY and SET UP** The  $x$ -acceleration is a function of time, so we *cannot* use the constant-acceleration formulas of Section 2.4. Instead, we use Eq. (2.17) to obtain an expression for  $v_x$  as a function of time, and then use that result in Eq. (2.18) to find an expression for  $x$  as a function of  $t$ . We'll then be able to answer a variety of questions about the motion.

**EXECUTE** (a) At  $t = 0$ , Sally's position is  $x_0 = 50$  m and her  $x$ -velocity is  $v_{0x} = 10$  m/s. To use Eq. (2.17), we note that the integral of  $t^n$  (except for  $n = -1$ ) is  $\int t^n dt = \frac{1}{n+1}t^{n+1}$ . Hence

$$\begin{aligned} v_x &= 10 \text{ m/s} + \int_0^t [2.0 \text{ m/s}^2 - (0.10 \text{ m/s}^3)t] dt \\ &= 10 \text{ m/s} + (2.0 \text{ m/s}^2)t - \frac{1}{2}(0.10 \text{ m/s}^3)t^2 \end{aligned}$$

Now we use Eq. (2.18) to find  $x$  as a function of  $t$ :

$$\begin{aligned} x &= 50 \text{ m} + \int_0^t [10 \text{ m/s} + (2.0 \text{ m/s}^2)t - \frac{1}{2}(0.10 \text{ m/s}^3)t^2] dt \\ &= 50 \text{ m} + (10 \text{ m/s})t + \frac{1}{2}(2.0 \text{ m/s}^2)t^2 - \frac{1}{6}(0.10 \text{ m/s}^3)t^3 \end{aligned}$$

**Figure 2.29** shows graphs of  $a_x$ ,  $v_x$ , and  $x$  as functions of time as given by the previous equations. Note that for any time  $t$ , the slope of the  $v_x$ - $t$  graph equals the value of  $a_x$  and the slope of the  $x$ - $t$  graph equals the value of  $v_x$ .

(b) The maximum value of  $v_x$  occurs when the  $x$ -velocity stops increasing and begins to decrease. At that instant,  $dv_x/dt = a_x = 0$ . So we set the expression for  $a_x$  equal to zero and solve for  $t$ :

$$\begin{aligned} 0 &= 2.0 \text{ m/s}^2 - (0.10 \text{ m/s}^3)t \\ t &= \frac{2.0 \text{ m/s}^2}{0.10 \text{ m/s}^3} = 20 \text{ s} \end{aligned}$$

(c) We find the maximum  $x$ -velocity by substituting  $t = 20$  s, the time from part (b) when velocity is maximum, into the equation for  $v_x$  from part (a):

$$\begin{aligned} v_{\text{max-}x} &= 10 \text{ m/s} + (2.0 \text{ m/s}^2)(20 \text{ s}) - \frac{1}{2}(0.10 \text{ m/s}^3)(20 \text{ s})^2 \\ &= 30 \text{ m/s} \end{aligned}$$

(d) To find the car's position at the time that we found in part (b), we substitute  $t = 20$  s into the expression for  $x$  from part (a):


$$\begin{aligned} x &= 50 \text{ m} + (10 \text{ m/s})(20 \text{ s}) + \frac{1}{2}(2.0 \text{ m/s}^2)(20 \text{ s})^2 - \frac{1}{6}(0.10 \text{ m/s}^3)(20 \text{ s})^3 \\ &= 517 \text{ m} \end{aligned}$$

**EVALUATE** Figure 2.29 helps us interpret our results. The left-hand graph shows that  $a_x$  is positive between  $t = 0$  and  $t = 20$  s and negative after that. It is zero at  $t = 20$  s, the time at which  $v_x$  is maximum (the high point in the middle graph). The car speeds up until  $t = 20$  s (because  $v_x$  and  $a_x$  have the same sign) and slows down after  $t = 20$  s (because  $v_x$  and  $a_x$  have opposite signs).

Since  $v_x$  is maximum at  $t = 20$  s, the  $x$ - $t$  graph (the right-hand graph in Fig. 2.29) has its maximum positive slope at this time. Note that the  $x$ - $t$  graph is concave up (curved upward) from  $t = 0$  to  $t = 20$  s, when  $a_x$  is positive. The graph is concave down (curved downward) after  $t = 20$  s, when  $a_x$  is negative.

**KEYCONCEPT** If the acceleration in straight-line motion is not constant but is a known function of time, you can find the velocity and position as functions of time by integration.

**Figure 2.29** The position, velocity, and acceleration of the car in Example 2.9 as functions of time. Can you show that if this motion continues, the car will stop at  $t = 44.5$  s?

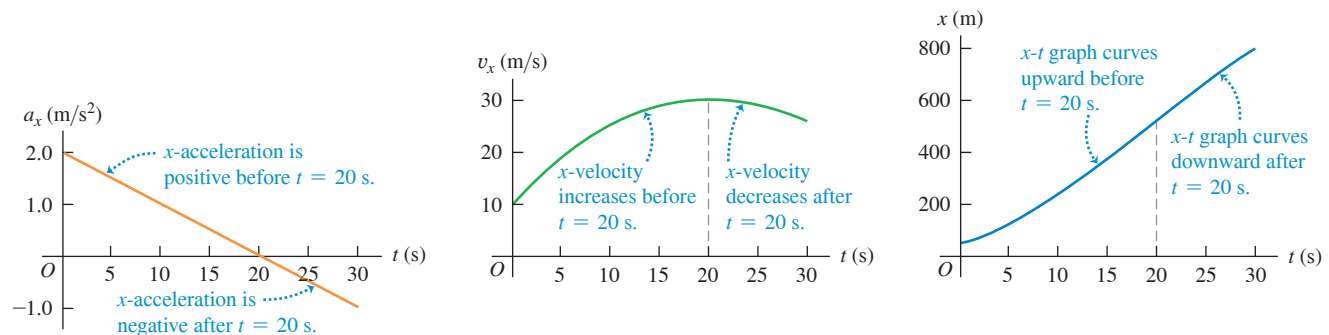

**TEST YOUR UNDERSTANDING OF SECTION 2.6** If the  $x$ -acceleration  $a_x$  of an object moving in straight-line motion is increasing with time, will the  $v_x$ - $t$  graph be (i) a straight line, (ii) concave up (i.e., with an upward curvature), or (iii) concave down (i.e., with a downward curvature)?


**ANSWER** (ii) The acceleration  $a_x$  is equal to the slope of the  $v_x$ - $t$  graph. If  $a_x$  is increasing, the slope of the  $v_x$ - $t$  graph is also increasing and the graph is concave up.

## CHAPTER 2 SUMMARY

**Straight-line motion, average and instantaneous  $x$ -velocity:** When a particle moves along a straight line, we describe its position with respect to an origin  $O$  by means of a coordinate such as  $x$ . The particle's average  $x$ -velocity  $v_{\text{av-}x}$  during a time interval  $\Delta t = t_2 - t_1$  is equal to its displacement  $\Delta x = x_2 - x_1$  divided by  $\Delta t$ . The instantaneous  $x$ -velocity  $v_x$  at any time  $t$  is equal to the average  $x$ -velocity over the time interval from  $t$  to  $t + \Delta t$  in the limit that  $\Delta t$  goes to zero. Equivalently,  $v_x$  is the derivative of the position function with respect to time. (See Example 2.1.)

$$v_{\text{av-}x} = \frac{\Delta x}{\Delta t} = \frac{x_2 - x_1}{t_2 - t_1} \quad (2.2)$$


$$v_x = \lim_{\Delta t \rightarrow 0} \frac{\Delta x}{\Delta t} = \frac{dx}{dt} \quad (2.3)$$



**Average and instantaneous  $x$ -acceleration:** The average  $x$ -acceleration  $a_{\text{av-}x}$  during a time interval  $\Delta t$  is equal to the change in velocity  $\Delta v_x = v_{2x} - v_{1x}$  during that time interval divided by  $\Delta t$ . The instantaneous  $x$ -acceleration  $a_x$  is the limit of  $a_{\text{av-}x}$  as  $\Delta t$  goes to zero, or the derivative of  $v_x$  with respect to  $t$ . (See Examples 2.2 and 2.3.)

$$a_{\text{av-}x} = \frac{\Delta v_x}{\Delta t} = \frac{v_{2x} - v_{1x}}{t_2 - t_1} \quad (2.4)$$

$$a_x = \lim_{\Delta t \rightarrow 0} \frac{\Delta v_x}{\Delta t} = \frac{dv_x}{dt} \quad (2.5)$$



**Straight-line motion with constant acceleration:** When the  $x$ -acceleration is constant, four equations relate the position  $x$  and the  $x$ -velocity  $v_x$  at any time  $t$  to the initial position  $x_0$ , the initial  $x$ -velocity  $v_{0x}$  (both measured at time  $t = 0$ ), and the  $x$ -acceleration  $a_x$ . (See Examples 2.4 and 2.5.)


Constant  $x$ -acceleration only:

$$v_x = v_{0x} + a_x t \quad (2.8)$$


$$x = x_0 + v_{0x} t + \frac{1}{2} a_x t^2 \quad (2.12)$$

$$v_x^2 = v_{0x}^2 + 2a_x(x - x_0) \quad (2.13)$$

$$x - x_0 = \frac{1}{2}(v_{0x} + v_x)t \quad (2.14)$$




**Freely falling objects:** Free fall (vertical motion without air resistance, so only gravity affects the motion) is a case of motion with constant acceleration. The magnitude of the acceleration due to gravity is a positive quantity,  $g$ . The acceleration of an object in free fall is always downward. (See Examples 2.6–2.8.)




**Straight-line motion with varying acceleration:** When the acceleration is not constant but is a known function of time, we can find the velocity and position as functions of time by integrating the acceleration function. (See Example 2.9.)

$$v_x = v_{0x} + \int_0^t a_x dt \quad (2.17)$$

$$x = x_0 + \int_0^t v_x dt \quad (2.18)$$





## GUIDED PRACTICE

For assigned homework and other learning materials, go to Mastering Physics.

### KEY EXAMPLE **V**ARIATION PROBLEMS

Be sure to review **EXAMPLE 2.5** (Section 2.4) before attempting these problems.

**VP2.5.1** A sports car starts from rest at an intersection and accelerates toward the east on a straight road at  $8.0 \text{ m/s}^2$ . Just as the sports car starts to move, a bus traveling east at a constant  $18 \text{ m/s}$  on the same straight road passes the sports car. When the sports car catches up with and passes the bus, (a) how much time has elapsed and (b) how far has the sports car traveled?

**VP2.5.2** A car is traveling on a straight road at a constant  $30.0 \text{ m/s}$ , which is faster than the speed limit. Just as the car passes a police motorcycle that is stopped at the side of the road, the motorcycle accelerates forward in pursuit. The motorcycle passes the car  $12.5 \text{ s}$  after starting from rest. (a) What is the acceleration of the motorcycle (assumed to be constant)? (b) How far does the motorcycle travel before it passes the car?

**VP2.5.3** A police car is traveling north on a straight road at a constant  $20.0 \text{ m/s}$ . An SUV traveling north at  $30.0 \text{ m/s}$  passes the police car. The driver of the SUV suspects he may be exceeding the speed limit, so just as he passes the police car he lets the SUV slow down at a constant  $1.80 \text{ m/s}^2$ . (a) How much time elapses from when the SUV passes the police car to when the police car passes the SUV? (b) What distance does the SUV travel during this time? (c) What is the speed of the SUV when the police car passes it?

**VP2.5.4** At  $t = 0$  a truck starts from rest at  $x = 0$  and speeds up in the positive  $x$ -direction on a straight road with acceleration  $a_T$ . At the same time,  $t = 0$ , a car is at  $x = 0$  and traveling in the positive  $x$ -direction with speed  $v_C$ . The car has a constant negative  $x$ -acceleration:  $a_{\text{car-}x} = -a_C$ , where  $a_C$  is a positive quantity. (a) At what time does the truck pass the car? (b) At what  $x$ -coordinate does the truck pass the car?

Be sure to review **EXAMPLE 2.7** (Section 2.5) before attempting these problems.

**VP2.7.1** You throw a ball straight up from the edge of a cliff. It leaves your hand moving at  $12.0 \text{ m/s}$ . Air resistance can be neglected. Take the positive  $y$ -direction to be upward, and choose  $y = 0$  to be the point where the ball leaves your hand. Find the ball's position and velocity (a)  $0.300 \text{ s}$  after it leaves your hand and (b)  $2.60 \text{ s}$  after it leaves your hand. At each time state whether the ball is above or below your hand and whether it is moving upward or downward.

**VP2.7.2** You throw a stone straight down from the top of a tall tower. It leaves your hand moving at  $8.00 \text{ m/s}$ . Air resistance can be neglected. Take the positive  $y$ -direction to be upward, and choose  $y = 0$  to be the

point where the stone leaves your hand. (a) Find the stone's position and velocity  $1.50 \text{ s}$  after it leaves your hand. (b) Find the stone's velocity when it is  $8.00 \text{ m}$  below your hand.

**VP2.7.3** You throw a football straight up. Air resistance can be neglected. (a) When the football is  $4.00 \text{ m}$  above where it left your hand, it is moving upward at  $0.500 \text{ m/s}$ . What was the speed of the football when it left your hand? (b) How much time elapses from when the football leaves your hand until it is  $4.00 \text{ m}$  above your hand?

**VP2.7.4** You throw a tennis ball straight up. Air resistance can be neglected. (a) The maximum height above your hand that the ball reaches is  $H$ . At what speed does the ball leave your hand? (b) What is the speed of the ball when it is a height  $H/2$  above your hand? Express your answer as a fraction of the speed at which it left your hand. (c) At what height above your hand is the speed of the ball half as great as when it left your hand? Express your answer in terms of  $H$ .

Be sure to review **EXAMPLE 2.8** (Section 2.5) before attempting these problems.

**VP2.8.1** You throw a rock straight up from the edge of a cliff. It leaves your hand at time  $t = 0$  moving at  $12.0 \text{ m/s}$ . Air resistance can be neglected. (a) Find both times at which the rock is  $4.00 \text{ m}$  above where it left your hand. (b) Find the time when the rock is  $4.00 \text{ m}$  below where it left your hand.

**VP2.8.2** You throw a basketball straight down from the roof of a building. The basketball leaves your hand at time  $t = 0$  moving at  $9.00 \text{ m/s}$ . Air resistance can be neglected. Find the time when the ball is  $5.00 \text{ m}$  below where it left your hand.

**VP2.8.3** You throw an apple straight up. The apple leaves your hand at time  $t = 0$  moving at  $5.50 \text{ m/s}$ . Air resistance can be neglected. (a) How many times (two, one, or none) does the apple pass through a point  $1.30 \text{ m}$  above your hand? If the apple does pass through this point, at what times  $t$  does it do so, and is the apple moving upward or downward at each of these times? (b) How many times (two, one, or none) does the apple pass through a point  $1.80 \text{ m}$  above your hand? If the apple does pass through this point, at what times  $t$  does it do so, and is the apple moving upward or downward at each of these times?

**VP2.8.4** You throw an orange straight up. The orange leaves your hand at time  $t = 0$  moving at speed  $v_0$ . Air resistance can be neglected. (a) At what time(s) is the orange at a height  $v_0^2/2g$  above the point where it left your hand? At these time(s) is the orange moving upward, downward, or neither? (b) At what time(s) is the orange at a height  $3v_0^2/8g$  above the point where it left your hand? At these time(s) is the orange moving upward, downward, or neither?

### BRIDGING PROBLEM The Fall of a Superhero

The superhero Green Lantern steps from the top of a tall building. He falls freely from rest to the ground, falling half the total distance to the ground during the last  $1.00 \text{ s}$  of his fall (**Fig. 2.30**). What is the height  $h$  of the building?


#### SOLUTION GUIDE

#### IDENTIFY and SET UP

1. You're told that Green Lantern falls freely from rest. What does this imply about his acceleration? About his initial velocity?

2. Choose the direction of the positive  $y$ -axis. It's easiest to make the same choice we used for freely falling objects in Section 2.5.
3. You can divide Green Lantern's fall into two parts: from the top of the building to the halfway point and from the halfway point to the ground. You know that the second part of the fall lasts  $1.00 \text{ s}$ . Decide what you would need to know about Green Lantern's motion at the halfway point in order to solve for the target variable  $h$ . Then choose two equations, one for the first part of the fall and one for the second part, that you'll use

Figure 2.30 Green Lantern in free fall.

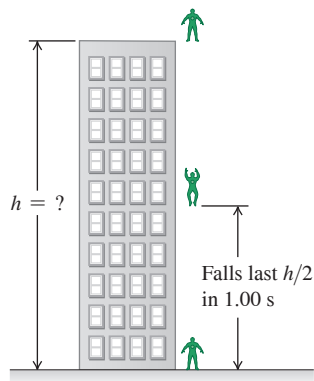

together to find an expression for  $h$ . (There are several pairs of equations that you could choose.)

**EXECUTE**

- Use your two equations to solve for the height  $h$ . Heights are always positive numbers, so your answer should be positive.

**EVALUATE**

- To check your answer for  $h$ , use one of the free-fall equations to find how long it takes Green Lantern to fall (i) from the top of the building to half the height and (ii) from the top of the building to the ground. If your answer for  $h$  is correct, time (ii) should be 1.00 s greater than time (i). If it isn't, go back and look for errors in how you found  $h$ .

**PROBLEMS**


•, ••, •••: Difficulty levels. **CP**: Cumulative problems incorporating material from earlier chapters. **CALC**: Problems requiring calculus. **DATA**: Problems involving real data, scientific evidence, experimental design, and/or statistical reasoning. **BIO**: Biosciences problems.

**DISCUSSION QUESTIONS**

**Q2.1** Does the speedometer of a car measure speed or velocity? Explain.

**Q2.2** The black dots at the top of **Fig. Q2.2** represent a series of high-speed photographs of an insect flying in a straight line from left to right (in the positive  $x$ -direction). Which of the graphs in **Fig. Q2.2** most plausibly depicts this insect's motion?

Figure Q2.2

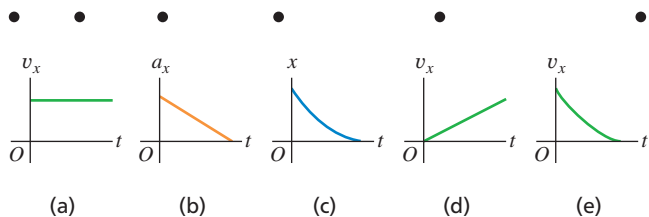

**Q2.3** Can an object with constant acceleration reverse its direction of travel? Can it reverse its direction *twice*? In both cases, explain your reasoning.

**Q2.4** Under what conditions is average velocity equal to instantaneous velocity?

**Q2.5** Is it possible for an object to be (a) slowing down while its acceleration is increasing in magnitude; (b) speeding up while its acceleration is decreasing? In both cases, explain your reasoning.

**Q2.6** Under what conditions does the magnitude of the average velocity equal the average speed?

**Q2.7** When a Porsche 911 GT3 is at Nino's Pizza, a BMW Z4 is at the junction of Princess Street and Portland Street. Later, when the Porsche reaches the junction of Princess and Portland, the BMW reaches Nino's Pizza. How are the cars' average velocities between these two times related?

**Q2.8** A driver in Nairobi was sent to traffic court for speeding. The evidence against the driver was that a policewoman observed the driver's car alongside a second car at a certain moment, and the policewoman had already clocked the second car going faster than the speed limit. The driver argued, "The second car was passing me. I was not

speeding." The judge ruled against the driver because, in the judge's words, "If two cars were side by side, both of you were speeding." If you were a lawyer representing the accused driver, how would you argue this case?

**Q2.9** Can you have zero displacement and nonzero average velocity? Zero displacement and nonzero velocity? Illustrate your answers on an  $x$ - $t$  graph.

**Q2.10** Can you have zero acceleration and nonzero velocity? Use a  $v_x$ - $t$  graph to explain.

**Q2.11** Can you have zero velocity and nonzero average acceleration? Zero velocity and nonzero acceleration? Use a  $v_x$ - $t$  graph to explain, and give an example of such motion.

**Q2.12** An automobile is traveling west. Can it have a velocity toward the west and at the same time have an acceleration toward the east? Under what circumstances?

**Q2.13** The official's truck in **Fig. 2.2** is at  $x_1 = 277$  m at  $t_1 = 16.0$  s and is at  $x_2 = 19$  m at  $t_2 = 25.0$  s. (a) Sketch *two* different possible  $x$ - $t$  graphs for the motion of the truck. (b) Does the average velocity  $v_{av-x}$  during the time interval from  $t_1$  to  $t_2$  have the same value for both of your graphs? Why or why not?

**Q2.14** Under constant acceleration the average velocity of a particle is half the sum of its initial and final velocities. Is this still true if the acceleration is *not* constant? Explain.

**Q2.15** You throw a tennis ball straight up in the air so that it rises to a maximum height much greater than your height. Is the magnitude of the ball's acceleration greater while it is being thrown or after it leaves your hand? Explain.

**Q2.16** Prove these statements: (a) As long as you can ignore the effects of the air, if you throw anything vertically upward, it will have the same speed when it returns to the release point as when it was released. (b) The time of flight will be twice the time it takes to get to its highest point.

**Q2.17** A dripping water faucet steadily releases drops 1.0 s apart. As these drops fall, does the distance between them increase, decrease, or remain the same? Prove your answer.

**Q2.18** If you know the initial position and initial velocity of a vehicle and have a record of the acceleration at each instant, can you compute the vehicle's position after a certain time? If so, explain how this might be done.



**Q2.19** From the top of a tall building, you throw one ball straight up with speed  $v_0$  and one ball straight down with speed  $v_0$ . (a) Which ball has the greater speed when it reaches the ground? (b) Which ball gets to the ground first? (c) Which ball has a greater displacement when it reaches the ground? (d) Which ball has traveled the greater distance when it hits the ground?

**Q2.20** You run due east at a constant speed of 3.00 m/s for a distance of 120.0 m and then continue running east at a constant speed of 5.00 m/s for another 120.0 m. For the total 240.0 m run, is your average velocity 4.00 m/s, greater than 4.00 m/s, or less than 4.00 m/s? Explain.

**Q2.21** An object is thrown straight up into the air and feels no air resistance. How can the object have an acceleration when it has stopped moving at its highest point?

**Q2.22** When you drop an object from a certain height, it takes time  $T$  to reach the ground with no air resistance. If you dropped it from three times that height, how long (in terms of  $T$ ) would it take to reach the ground?

## EXERCISES

### Section 2.1 Displacement, Time, and Average Velocity

**2.1** • A car travels in the  $+x$ -direction on a straight and level road. For the first 4.00 s of its motion, the average velocity of the car is  $v_{av-x} = 6.25$  m/s. How far does the car travel in 4.00 s?

**2.2** •• In an experiment, a shearwater (a seabird) was taken from its nest, flown 5150 km away, and released. The bird found its way back to its nest 13.5 days after release. If we place the origin at the nest and extend the  $+x$ -axis to the release point, what was the bird's average velocity in m/s (a) for the return flight and (b) for the whole episode, from leaving the nest to returning?

**2.3** •• **Trip Home.** You normally drive from Glasgow to Edinburgh via M8 motorway at an average speed of 72 km/h, and the trip takes 1 h and 2 min. At peak times, however, heavy traffic slows you down and you drive the same distance at an average speed of only 49 km/h. How much longer does the trip take?

**2.4** •• **From Pillar to Post.** Starting from a pillar, you run 200 m east (the  $+x$ -direction) at an average speed of 5.0 m/s and then run 280 m west at an average speed of 4.0 m/s to a post. Calculate (a) your average speed from pillar to post and (b) your average velocity from pillar to post.

**2.5** • Starting from the front door of a farmhouse, you walk 60.0 m due east to a windmill, turn around, and then slowly walk 40.0 m west to a bench, where you sit and watch the sunrise. It takes you 28.0 s to walk from the house to the windmill and then 36.0 s to walk from the windmill to the bench. For the entire trip from the front door to the bench, what are your (a) average velocity and (b) average speed?

**2.6** •• A Honda Civic travels in a straight line along a road. The car's distance  $x$  from a stop sign is given as a function of time  $t$  by the equation  $x(t) = \alpha t^2 - \beta t^3$ , where  $\alpha = 1.50$  m/s<sup>2</sup> and  $\beta = 0.0500$  m/s<sup>3</sup>. Calculate the average velocity of the car for each time interval: (a)  $t = 0$  to  $t = 2.00$  s; (b)  $t = 0$  to  $t = 4.00$  s; (c)  $t = 2.00$  s to  $t = 4.00$  s.


### SECTION 2.2 Instantaneous Velocity

**2.7** • **CALC** A car is stopped at a traffic light. It then travels along a straight road such that its distance from the light is given by  $x(t) = bt^2 - ct^3$ , where  $b = 2.40$  m/s<sup>2</sup> and  $c = 0.120$  m/s<sup>3</sup>. (a) Calculate the average velocity of the car for the time interval  $t = 0$  to  $t = 10.0$  s. (b) Calculate the instantaneous velocity of the car at  $t = 0$ ,  $t = 5.0$  s, and  $t = 10.0$  s. (c) How long after starting from rest is the car again at rest?

**2.8** • **CALC** A bird is flying due east. Its distance from a tall building is given by  $x(t) = 28.0$  m +  $(12.4$  m/s) $t - (0.0450$  m/s<sup>3</sup>) $t^3$ . What is the instantaneous velocity of the bird when  $t = 8.00$  s?


**2.9** •• A ball moves in a straight line (the  $x$ -axis). The graph in **Fig. E2.9** shows this ball's velocity as a function of time. (a) What are the ball's average speed and average velocity during the first 3.0 s? (b) Suppose that the ball moved in such a way that the graph segment after 2.0 s was  $-3.0$  m/s instead of  $+3.0$  m/s. Find the ball's average speed and average velocity in this case.

Figure E2.9




**2.10** •• A physics professor leaves her house and walks along the pavement toward campus. After 5 min it starts to rain, and she returns home. Her distance from her house as a function of time is shown in **Fig. E2.10**. At which of the labeled points is her velocity (a) zero? (b) constant and positive? (c) constant and negative? (d) increasing in magnitude? (e) decreasing in magnitude?

Figure E2.10

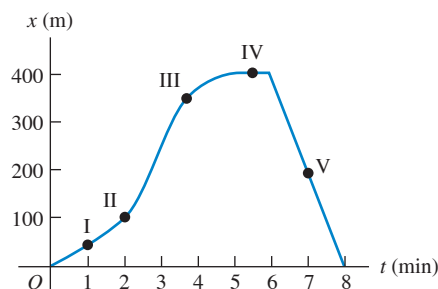

**2.11** •• A test car travels in a straight line along the  $x$ -axis. The graph in **Fig. E2.11** shows the car's position  $x$  as a function of time. Find its instantaneous velocity at points A through G.


Figure E2.11



### Section 2.3 Average and Instantaneous Acceleration

**2.12** • **Figure E2.12** shows the velocity of a solar-powered car as a function of time. The driver accelerates from a stop sign, cruises for 20 s at a constant speed of 60 km/h, and then brakes to come to a stop 40 s after leaving the stop sign. (a) Compute the average acceleration during these time intervals: (i)  $t = 0$  to  $t = 10$  s; (ii)  $t = 30$  s to  $t = 40$  s; (iii)  $t = 10$  s to  $t = 30$  s; (iv)  $t = 0$  to  $t = 40$  s. (b) What is the instantaneous acceleration at  $t = 20$  s and at  $t = 35$  s?

Figure E2.12

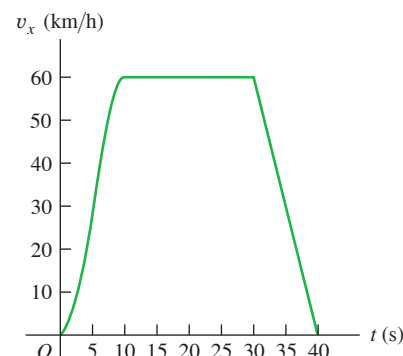

**2.13 • CALC** A turtle crawls along a straight line, which we'll call the  $x$ -axis with the positive direction to the right. The equation for the turtle's position as a function of time is  $x(t) = 50.0 \text{ cm} + (2.00 \text{ cm/s})t - (0.0625 \text{ cm/s}^2)t^2$ . (a) Find the turtle's initial velocity, initial position, and initial acceleration. (b) At what time  $t$  is the velocity of the turtle zero? (c) How long after starting does it take the turtle to return to its starting point? (d) At what times  $t$  is the turtle a distance of 10.0 cm from its starting point? What is the velocity (magnitude and direction) of the turtle at each of those times? (e) Sketch graphs of  $x$  versus  $t$ ,  $v_x$  versus  $t$ , and  $a_x$  versus  $t$ , for the time interval  $t = 0$  to  $t = 40$  s.

**2.14 •• CALC** A race car starts from rest and travels east along a straight and level track. For the first 5.0 s of the car's motion, the eastward component of the car's velocity is given by  $v_x(t) = (0.860 \text{ m/s}^3)t^2$ . What is the acceleration of the car when  $v_x = 12.0 \text{ m/s}$ ?

**2.15 • CALC** A car's velocity as a function of time is given by  $v_x(t) = \alpha + \beta t^2$ , where  $\alpha = 3.00 \text{ m/s}$  and  $\beta = 0.100 \text{ m/s}^3$ . (a) Calculate the average acceleration for the time interval  $t = 0$  to  $t = 5.00$  s. (b) Calculate the instantaneous acceleration for  $t = 0$  and  $t = 5.00$  s. (c) Draw  $v_x$ - $t$  and  $a_x$ - $t$  graphs for the car's motion between  $t = 0$  and  $t = 5.00$  s.

**2.16 •** An astronaut has left the International Space Station to test a new space scooter. Her partner measures the following velocity changes, each taking place in a 10 s interval. What are the magnitude, the algebraic sign, and the direction of the average acceleration in each interval? Assume that the positive direction is to the right. (a) At the beginning of the interval, the astronaut is moving toward the right along the  $x$ -axis at 15.0 m/s, and at the end of the interval she is moving toward the right at 5.0 m/s. (b) At the beginning she is moving toward the left at 5.0 m/s, and at the end she is moving toward the left at 15.0 m/s. (c) At the beginning she is moving toward the right at 15.0 m/s, and at the end she is moving toward the left at 15.0 m/s.

**2.17 •• CALC** The position of the front bumper of a test car under microprocessor control is given by  $x(t) = 2.17 \text{ m} + (4.80 \text{ m/s}^2)t^2 - (0.100 \text{ m/s}^6)t^6$ . (a) Find its position and acceleration at the instants when the car has zero velocity. (b) Draw  $x$ - $t$ ,  $v_x$ - $t$ , and  $a_x$ - $t$  graphs for the motion of the bumper between  $t = 0$  and  $t = 2.00$  s.

### Section 2.4 Motion with Constant Acceleration

**2.18 •** Estimate the distance that your car travels on the entrance ramp to a freeway as it accelerates from 50 km/h to the freeway speed of 110 km/h. During this motion what is the average acceleration of the car?

**2.19 ••** An antelope moving with constant acceleration covers the distance between two points 70.0 m apart in 6.00 s. Its speed as it passes the second point is 15.0 m/s. What are (a) its speed at the first point and (b) its acceleration?

**2.20 •• A Tennis Serve.** In the fastest measured tennis serve, the ball left the racquet at 73.14 m/s. A served tennis ball is typically in contact with the racquet for 30.0 ms and starts from rest. Assume constant acceleration. (a) What was the ball's acceleration during this serve? (b) How far did the ball travel during the serve?

**2.21 • A Fast Pitch.** The fastest measured pitched baseball left the pitcher's hand at a speed of 45.0 m/s. If the pitcher was in contact with the ball over a distance of 1.50 m and produced constant acceleration, (a) what acceleration did he give the ball, and (b) how much time did it take him to pitch it?

**2.22 •** You are traveling on a motorway at the posted speed limit of 110 km/h when you see that the traffic in front of you has stopped due to an accident up ahead. You step on your brakes to slow down as quickly as possible. (a) Estimate how many seconds it takes you to slow down to 50 km/h. What is the magnitude of the average acceleration of the car while it is slowing down? With this same average acceleration, (b) how much longer would it take you to stop, and (c) what total

distance would you travel from when you first apply the brakes until the car stops?


**2.23 •• BIO Automobile Airbags.** The human body can survive an acceleration trauma incident (sudden stop) if the magnitude of the acceleration is less than  $250 \text{ m/s}^2$ . If you are in an automobile accident with an initial speed of 105 km/h and are stopped by an airbag that inflates from the dashboard, over what minimum distance must the airbag stop you for you to survive the crash?

**2.24 • Entering the Freeway.** A car sits on an entrance ramp to a freeway, waiting for a break in the traffic. Then the driver accelerates with constant acceleration along the ramp and onto the freeway. The car starts from rest, moves in a straight line, and has a speed of 20 m/s when it reaches the end of the 120-m-long ramp. (a) What is the acceleration of the car? (b) How much time does it take the car to travel the length of the ramp? (c) The traffic on the freeway is moving at a constant speed of 20 m/s. What distance does the traffic travel while the car is moving the length of the ramp?

**2.25 • BIO Airbag Injuries.** During an auto accident, the vehicle's airbags deploy and slow down the passengers more gently than if they had hit the windshield or steering wheel. According to safety standards, airbags produce a maximum acceleration of  $60g$  that lasts for only 36 ms (or less). How far (in meters) does a person travel in coming to a complete stop in 36 ms at a constant acceleration of  $60g$ ?

**2.26 ••** A cat walks in a straight line, which we shall call the  $x$ -axis, with the positive direction to the right. As an observant physicist, you make measurements of this cat's motion and construct a graph of the feline's velocity as a function of time (**Fig. E2.26**). (a) Find the cat's velocity at  $t = 4.0$  s and at  $t = 7.0$  s. (b) What is the cat's acceleration at  $t = 3.0$  s? At  $t = 6.0$  s? At  $t = 7.0$  s? (c) What distance does the cat move during the first 4.5 s? From  $t = 0$  to  $t = 7.0$  s? (d) Assuming that the cat started at the origin, sketch clear graphs of the cat's acceleration and position as functions of time.


Figure E2.26

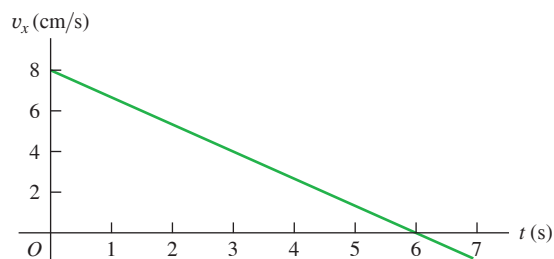

**2.27 • BIO Are We Martians?** It has been suggested, and not facetiously, that life might have originated on Mars and been carried to the earth when a meteor hit Mars and blasted pieces of rock (perhaps containing primitive life) free of the Martian surface. Astronomers know that many Martian rocks have come to the earth this way. (For instance, search the Internet for "ALH 84001.") One objection to this idea is that microbes would have had to undergo an enormous lethal acceleration during the impact. Let us investigate how large such an acceleration might be. To escape Mars, rock fragments would have to reach its escape velocity of 5.0 km/s, and that would most likely happen over a distance of about 4.0 m during the meteor impact. (a) What would be the acceleration (in  $\text{m/s}^2$  and  $g$ 's) of such a rock fragment, if the acceleration is constant? (b) How long would this acceleration last? (c) In tests, scientists have found that over 40% of *Bacillus subtilis* bacteria survived after an acceleration of  $450,000g$ . In light of your answer to part (a), can we rule out the hypothesis that life might have been blasted from Mars to the earth?


**2.28 •** Two cars, *A* and *B*, move along the *x*-axis. **Figure E2.28** is a graph of the positions of *A* and *B* versus time. (a) In motion diagrams (like Figs. 2.13b and 2.14b), show the position, velocity, and acceleration of each of the two cars at  $t = 0$ ,  $t = 1$  s, and  $t = 3$  s. (b) At what time(s), if any, do *A* and *B* have the same position? (c) Graph velocity versus time for both *A* and *B*. (d) At what time(s), if any, do *A* and *B* have the same velocity? (e) At what time(s), if any, does car *A* pass car *B*? (f) At what time(s), if any, does car *B* pass car *A*?

Figure E2.28



**2.29 ••** The graph in **Fig. E2.29** shows the velocity of a motorcycle police officer plotted as a function of time. (a) Find the instantaneous acceleration at  $t = 3$  s,  $t = 7$  s, and  $t = 11$  s. (b) How far does the officer go in the first 5 s? The first 9 s? The first 13 s?

Figure E2.29

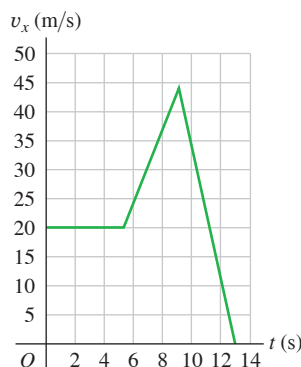

**2.30 ••** A small block has constant acceleration as it slides down a frictionless incline. The block is released from rest at the top of the incline, and its speed after it has traveled 6.80 m to the bottom of the incline is 3.80 m/s. What is the speed of the block when it is 3.40 m from the top of the incline?

**2.31 ••** (a) If a flea can jump straight up to a height of 0.440 m, what is its initial speed as it leaves the ground? (b) How long is it in the air?

**2.32 ••** A small rock is thrown vertically upward with a speed of 22.0 m/s from the edge of the roof of a 30.0-m-tall building. The rock doesn't hit the building on its way back down and lands on the street below. Ignore air resistance. (a) What is the speed of the rock just before it hits the street? (b) How much time elapses from when the rock is thrown until it hits the street?

### SECTION 2.5 Freely Falling Objects

**2.33 •** A juggler throws a bowling pin straight up with an initial speed of 8.20 m/s. How much time elapses until the bowling pin returns to the juggler's hand?

**2.34 ••** You throw a glob of putty straight up toward the ceiling, which is 3.60 m above the point where the putty leaves your hand. The initial speed of the putty as it leaves your hand is 9.50 m/s. (a) What is the speed of the putty just before it strikes the ceiling? (b) How much time from when it leaves your hand does it take the putty to reach the ceiling?

**2.35 ••** A tennis ball on Mars, where the acceleration due to gravity is  $0.379g$  and air resistance is negligible, is hit directly upward and returns to the same level 8.5 s later. (a) How high above its original point did the ball go? (b) How fast was it moving just after it was hit? (c) Sketch graphs of the ball's vertical position, vertical velocity, and vertical acceleration as functions of time while it's in the Martian air.

**2.36 ••** Estimate the maximum height that you can throw a tennis ball straight up. (a) For this height, how long after the ball leaves your hand does it return to your hand? (b) Estimate the distance that the ball moves while you are throwing it—that is, the distance from where the ball is when you start your throw until it leaves your hand. Calculate the average

acceleration in  $\text{m/s}^2$  that the ball has while it is being thrown, as it moves from rest to the point where it leaves your hand.

**2.37 ••** A rock is thrown straight up with an initial speed of 24.0 m/s. Neglect air resistance. (a) At  $t = 1.0$  s, what are the directions of the velocity and acceleration of the rock? Is the speed of the rock increasing or decreasing? (b) At  $t = 3.0$  s, what are the directions of the velocity and acceleration of the rock? Is the speed of the rock increasing or decreasing?


**2.38 ••** A brick is dropped (zero initial speed) from the roof of a building. The brick strikes the ground in 1.90 s. You may ignore air resistance, so the brick is in free fall. (a) How tall, in meters, is the building? (b) What is the magnitude of the brick's velocity just before it reaches the ground? (c) Sketch  $a_y$ - $t$ ,  $v_y$ - $t$ , and  $y$ - $t$  graphs for the motion of the brick.

**2.39 •• A Simple Reaction-Time Test.** A meter stick is held vertically above your hand, with the lower end between your thumb and first finger. When you see the meter stick released, you grab it with those two fingers. You can calculate your reaction time from the distance the meter stick falls, read directly from the point where your fingers grabbed it. (a) Derive a relationship for your reaction time in terms of this measured distance,  $d$ . (b) If the measured distance is 17.6 cm, what is your reaction time?

**2.40 •• Touchdown on the Moon.**

A lunar lander is making its descent to Moon Base I (**Fig. E2.40**). The lander descends slowly under the retro-thrust of its descent engine. The engine is cut off when the lander is 5.0 m above the surface and has a downward speed of 0.8 m/s. With the engine off, the lander is in free fall. What is the speed of the lander just before it touches the surface? The acceleration due to gravity on the moon is  $1.6 \text{ m/s}^2$ .


Figure E2.40



**2.41 •• Launch Failure.** A 7500 kg rocket blasts off vertically from the launch pad with a constant upward acceleration of  $2.25 \text{ m/s}^2$  and feels no appreciable air resistance. When it has reached a height of 525 m, its engines suddenly fail; the only force acting on it is now gravity. (a) What is the maximum height this rocket will reach above the launch pad? (b) How much time will elapse after engine failure before the rocket comes crashing down to the launch pad, and how fast will it be moving just before it crashes? (c) Sketch  $a_y$ - $t$ ,  $v_y$ - $t$ , and  $y$ - $t$  graphs of the rocket's motion from the instant of blast-off to the instant just before it strikes the launch pad.

**2.42 ••** A hot-air balloonist, rising vertically with a constant velocity of magnitude 5.00 m/s, releases a sandbag at an instant when the balloon is 40.0 m above the ground (**Fig. E2.42**). After the sandbag is released, it is in free fall. (a) Compute the position and velocity of the sandbag at 0.250 s and 1.00 s after its release. (b) How many seconds after its release does the bag strike the ground? (c) With what magnitude of velocity does it strike the ground? (d) What is the greatest height above the ground that the sandbag reaches? (e) Sketch  $a_y$ - $t$ ,  $v_y$ - $t$ , and  $y$ - $t$  graphs for the motion.

Figure E2.42

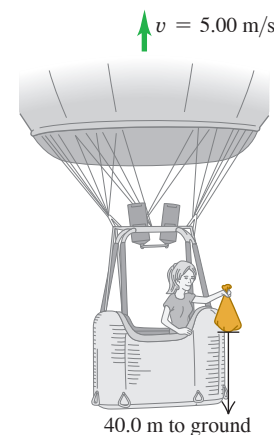

**2.43 •** You throw a rock straight up and find that it returns to your hand 3.60 s after it left your hand. Neglect air resistance. What was the maximum height above your hand that the rock reached?

**2.44 •** An egg is thrown nearly vertically upward from a point near the cornice of a tall building. The egg just misses the cornice on the way down and passes a point 30.0 m below its starting point 5.00 s after it leaves the thrower's hand. Ignore air resistance. (a) What is the initial speed of the egg? (b) How high does it rise above its starting point? (c) What is the magnitude of its velocity at the highest point? (d) What are the magnitude and direction of its acceleration at the highest point? (e) Sketch  $a_y$ - $t$ ,  $v_y$ - $t$ , and  $y$ - $t$  graphs for the motion of the egg.

**2.45 ••** A 15 kg rock is dropped from rest on the earth and reaches the ground in 1.75 s. When it is dropped from the same height on Saturn's satellite Enceladus, the rock reaches the ground in 18.6 s. What is the acceleration due to gravity on Enceladus?

**2.46 •** A large boulder is ejected vertically upward from a volcano with an initial speed of 40.0 m/s. Ignore air resistance. (a) At what time after being ejected is the boulder moving at 20.0 m/s upward? (b) At what time is it moving at 20.0 m/s downward? (c) When is the displacement of the boulder from its initial position zero? (d) When is the velocity of the boulder zero? (e) What are the magnitude and direction of the acceleration while the boulder is (i) moving upward? (ii) Moving downward? (iii) At the highest point? (f) Sketch  $a_y$ - $t$ ,  $v_y$ - $t$ , and  $y$ - $t$  graphs for the motion.

**2.47 ••** You throw a small rock straight up from the edge of a bridge that crosses a river. The rock passes you on its way down, 6.00 s after it was thrown. What is the speed of the rock just before it reaches the water 28.0 m below the point where the rock left your hand? Ignore air resistance.

### Section 2.6 Velocity and Position by Integration

**2.48 ••** Consider the motion described by the  $v_x$ - $t$  graph of Fig. E2.26. (a) Calculate the area under the graph between  $t = 0$  and  $t = 6.0$  s. (b) For the time interval  $t = 0$  to  $t = 6.0$  s, what is the magnitude of the average velocity of the cat? (c) Use constant-acceleration equations to calculate the distance the cat travels in this time interval. How does your result compare to the area you calculated in part (a)?

**2.49 • CALC** A rocket starts from rest and moves upward from the surface of the earth. For the first 10.0 s of its motion, the vertical acceleration of the rocket is given by  $a_y = (2.80 \text{ m/s}^3)t$ , where the  $+y$ -direction is upward. (a) What is the height of the rocket above the surface of the earth at  $t = 10.0$  s? (b) What is the speed of the rocket when it is 325 m above the surface of the earth?

**2.50 •• CALC** A small object moves along the  $x$ -axis with acceleration  $a_x(t) = -(0.0320 \text{ m/s}^3)(15.0 \text{ s} - t)$ . At  $t = 0$  the object is at  $x = -14.0$  m and has velocity  $v_{0x} = 8.00$  m/s. What is the  $x$ -coordinate of the object when  $t = 10.0$  s?

**2.51 •• CALC** The acceleration of a motorcycle is given by  $a_x(t) = At - Bt^2$ , where  $A = 1.50 \text{ m/s}^3$  and  $B = 0.120 \text{ m/s}^4$ . The motorcycle is at rest at the origin at time  $t = 0$ . (a) Find its position and velocity as functions of time. (b) Calculate the maximum velocity it attains.

**2.52 •• CALC** The acceleration of a bus is given by  $a_x(t) = \alpha t$ , where  $\alpha = 1.2 \text{ m/s}^3$ . (a) If the bus's velocity at time  $t = 1.0$  s is 5.0 m/s, what is its velocity at time  $t = 2.0$  s? (b) If the bus's position at time  $t = 1.0$  s is 6.0 m, what is its position at time  $t = 2.0$  s? (c) Sketch  $a_y$ - $t$ ,  $v_y$ - $t$ , and  $x$ - $t$  graphs for the motion.

### PROBLEMS

**2.53 • BIO** A typical male sprinter can maintain his maximum acceleration for 2.0 s, and his maximum speed is 10 m/s. After he reaches this maximum speed, his acceleration becomes zero, and then he runs at constant speed. Assume that his acceleration is constant during the first

2.0 s of the race, that he starts from rest, and that he runs in a straight line. (a) How far has the sprinter run when he reaches his maximum speed? (b) What is the magnitude of his average velocity for a race of these lengths: (i) 50.0 m; (ii) 100.0 m; (iii) 200.0 m?

**2.54 • CALC** A lunar lander is descending toward the moon's surface. Until the lander reaches the surface, its height above the surface of the moon is given by  $y(t) = b - ct + dt^2$ , where  $b = 800$  m is the initial height of the lander above the surface,  $c = 60.0$  m/s, and  $d = 1.05 \text{ m/s}^2$ . (a) What is the initial velocity of the lander, at  $t = 0$ ? (b) What is the velocity of the lander just before it reaches the lunar surface?

**2.55 ••• Earthquake Analysis.** Earthquakes produce several types of shock waves. The most well known are the P-waves (P for *primary* or *pressure*) and the S-waves (S for *secondary* or *shear*). In the earth's crust, P-waves travel at about 6.5 km/s and S-waves move at about 3.5 km/s. The time delay between the arrival of these two waves at a seismic recording station tells geologists how far away an earthquake occurred. If the time delay is 33 s, how far from the seismic station did the earthquake occur?

**2.56 ••** You throw a small rock straight up with initial speed  $V_0$  from the edge of the roof of a building that is a distance  $H$  above the ground. The rock travels upward to a maximum height in time  $T_{\text{max}}$ , misses the edge of the roof on its way down, and reaches the ground in time  $T_{\text{total}}$  after it was thrown. Neglect air resistance. If the total time the rock is in the air is three times the time it takes it to reach its maximum height, so  $T_{\text{total}} = 3T_{\text{max}}$ , then in terms of  $H$  what must be the value of  $V_0$ ?


**2.57 •••** A rocket carrying a satellite is accelerating straight up from the earth's surface. At 1.15 s after liftoff, the rocket clears the top of its launch platform, 63 m above the ground. After an additional 4.75 s, it is 1.00 km above the ground. Calculate the magnitude of the average velocity of the rocket for (a) the 4.75 s part of its flight and (b) the first 5.90 s of its flight.

**2.58 ••** A block moving on a horizontal surface is at  $x = 0$  when  $t = 0$  and is sliding east with a speed of 12.0 m/s. Because of a net force acting on the block, it has a constant acceleration with direction west and magnitude  $2.00 \text{ m/s}^2$ . The block travels east, slows down, reverses direction, and then travels west with increasing speed. (a) At what value of  $t$  is the block again at  $x = 0$ ? (b) What is the maximum distance east of  $x = 0$  that the block reaches, and how long does it take the block to reach this point?

**2.59 ••** A block is sliding with constant acceleration down an incline. The block starts from rest at  $t = 0$  and has speed 3.00 m/s after it has traveled a distance 8.00 m from its starting point. (a) What is the speed of the block when it is a distance of 16.0 m from its  $t = 0$  starting point? (b) How long does it take the block to slide 16.0 m from its starting point?


**2.60 •••** An underground train starts from rest at a station and accelerates at a rate of  $1.60 \text{ m/s}^2$  for 14.0 s. It runs at constant speed for 70.0 s and slows down at a rate of  $3.50 \text{ m/s}^2$  until it stops at the next station. Find the *total* distance covered.

**2.61 •** A gazelle is running in a straight line (the  $x$ -axis). The graph in Fig. P2.61 shows this animal's velocity as a function of time. During the first 12.0 s, find (a) the total distance moved and (b) the displacement of the gazelle. (c) Sketch an  $a_x$ - $t$  graph showing this gazelle's acceleration as a function of time for the first 12.0 s.

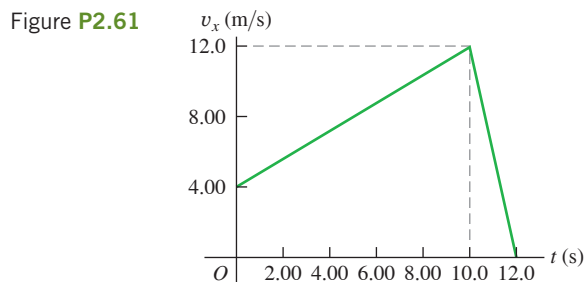

**2.62 •• Collision.** The engineer of a passenger train traveling at 25.0 m/s sights a freight train whose caboose is 200 m ahead on the same track (**Fig. P2.62**). The freight train is traveling at 15.0 m/s in the same direction as the passenger train. The engineer of the passenger train immediately applies the brakes, causing a constant acceleration of  $0.100 \text{ m/s}^2$  in a direction opposite to the train's velocity, while the freight train continues with constant speed. Take  $x = 0$  at the location of the front of the passenger train when the engineer applies the brakes. (a) Will the cows nearby witness a collision? (b) If so, where will it take place? (c) On a single graph, sketch the positions of the front of the passenger train and the back of the freight train.

Figure P2.62

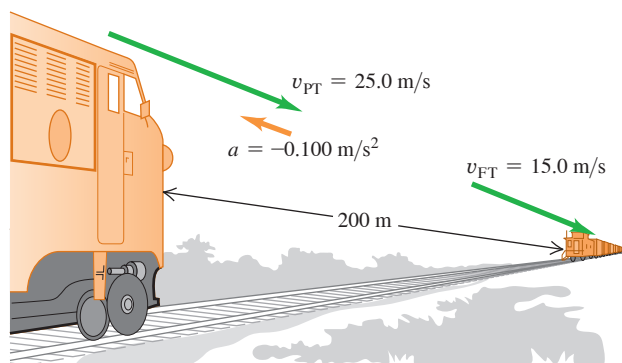

**2.63 •••** A ball starts from rest and rolls down a hill with uniform acceleration, traveling 200 m during the second 5.0 s of its motion. How far did it roll during the first 5.0 s of motion?

**2.64 ••** A rock moving in the  $+x$ -direction with speed 16.0 m/s has a net force applied to it at time  $t = 0$ , and this produces a constant acceleration in the  $-x$ -direction that has magnitude  $4.00 \text{ m/s}^2$ . For what three times  $t$  after the force is applied is the rock a distance of 24.0 m from its position at  $t = 0$ ? For each of these three values of  $t$ , what is the velocity (magnitude and direction) of the rock?

**2.65 •** A car and a truck start from rest at the same instant, with the car initially at some distance behind the truck. The truck has a constant acceleration of  $2.10 \text{ m/s}^2$ , and the car has an acceleration of  $3.40 \text{ m/s}^2$ . The car overtakes the truck after the truck has moved 60.0 m. (a) How much time does it take the car to overtake the truck? (b) How far was the car behind the truck initially? (c) What is the speed of each when they are abreast? (d) On a single graph, sketch the position of each vehicle as a function of time. Take  $x = 0$  at the initial location of the truck.

**2.66 ••** You are standing at rest at a bus stop. A bus moving at a constant speed of 5.00 m/s passes you. When the rear of the bus is 12.0 m past you, you realize that it is your bus, so you start to run toward it with a constant acceleration of  $0.960 \text{ m/s}^2$ . How far would you have to run before you catch up with the rear of the bus, and how fast must you be running then? Would an average college student be physically able to accomplish this?

**2.67 ••** A sprinter runs a 100 m dash in 12.0 s. She starts from rest with a constant acceleration  $a_x$  for 3.0 s and then runs with constant speed for the remainder of the race. What is the value of  $a_x$ ?


**2.68 •• CALC** An object's velocity is measured to be  $v_x(t) = \alpha - \beta t^2$ , where  $\alpha = 4.00 \text{ m/s}$  and  $\beta = 2.00 \text{ m/s}^3$ . At  $t = 0$  the object is at  $x = 0$ . (a) Calculate the object's position and acceleration as functions of time. (b) What is the object's maximum positive displacement from the origin?

**2.69 •• CALC** An object is moving along the  $x$ -axis. At  $t = 0$  it is at  $x = 0$ . Its  $x$ -component of velocity  $v_x$  as a function of time is given by  $v_x(t) = \alpha t - \beta t^3$ , where  $\alpha = 8.0 \text{ m/s}^2$  and  $\beta = 4.0 \text{ m/s}^4$ . (a) At what

nonzero time  $t$  is the object again at  $x = 0$ ? (b) At the time calculated in part (a), what are the velocity and acceleration of the object (magnitude and direction)?

**2.70 • Egg Drop.** You are on the roof of the physics building, 46.0 m above the ground (**Fig. P2.70**). Your physics professor, who is 1.80 m tall, is walking alongside the building at a constant speed of 1.20 m/s. If you wish to drop an egg on your professor's head, where should the professor be when you release the egg? Assume that the egg is in free fall.

Figure P2.70

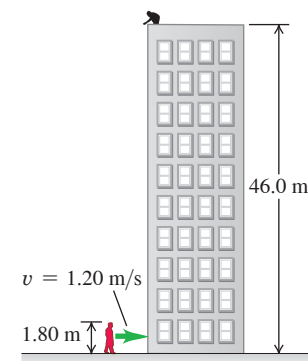

**2.71 ••• CALC** The acceleration of a particle is given by  $a_x(t) = -2.00 \text{ m/s}^2 + (3.00 \text{ m/s}^3)t$ . (a) Find the initial velocity  $v_{0x}$  such that the particle will have the same  $x$ -coordinate at  $t = 4.00 \text{ s}$  as it had at  $t = 0$ . (b) What will be the velocity at  $t = 4.00 \text{ s}$ ?

**2.72 ••** A small rock is thrown straight up with initial speed  $v_0$  from the edge of the roof of a building with height  $H$ . The rock travels upward and then downward to the ground at the base of the building. Let  $+y$  be upward, and neglect air resistance. (a) For the rock's motion from the roof to the ground, what is the vertical component  $v_{av-y}$  of its average velocity? Is this quantity positive or negative? Explain. (b) What does your expression for  $v_{av-y}$  give in the limit that  $H$  is zero? Explain. (c) Show that your result in part (a) agrees with Eq. (2.10).

**2.73 ••** A watermelon is dropped from the edge of the roof of a building and falls to the ground. You are standing on the pavement and see the watermelon falling when it is 30.0 m above the ground. Then 1.50 s after you first spot it, the watermelon lands at your feet. What is the height of the building? Neglect air resistance.

**2.74 •••** A flowerpot falls off a windowsill and passes the window of the story below. Ignore air resistance. It takes the pot 0.380 s to pass from the top to the bottom of this window, which is 1.90 m high. How far is the top of the window below the windowsill from which the flowerpot fell?

**2.75 ••• Look Out Below.** Kemal heaves a 7.26 kg shot straight up, giving it a constant upward acceleration from rest of  $35.0 \text{ m/s}^2$  for 64.0 cm. He releases it 2.20 m above the ground. Ignore air resistance. (a) What is the speed of the shot when Kemal releases it? (b) How high above the ground does it go? (c) How much time does he have to get out of its way before it returns to the height of the top of his head, 1.83 m above the ground?

**2.76 ••• A Multistage Rocket.** In the first stage of a two-stage rocket, the rocket is fired from the launch pad starting from rest but with a constant acceleration of  $3.50 \text{ m/s}^2$  upward. At 25.0 s after launch, the second stage fires for 10.0 s, which boosts the rocket's velocity to 132.5 m/s upward at 35.0 s after launch. This firing uses up all of the fuel, however, so after the second stage has finished firing, the only force acting on the rocket is gravity. Ignore air resistance. (a) Find the maximum height that the stage-two rocket reaches above the launch pad. (b) How much time after the end of the stage-two firing will it take for the rocket to fall back to the launch pad? (c) How fast will the stage-two rocket be moving just as it reaches the launch pad?

**2.77 ••** Two stones are thrown vertically upward from the ground, one with three times the initial speed of the other. (a) If the faster stone takes 10 s to return to the ground, how long will it take the slower stone to return? (b) If the slower stone reaches a maximum height of  $H$ , how high (in terms of  $H$ ) will the faster stone go? Assume free fall.

**2.78 •••** During your summer internship for an aerospace company, you are asked to design a small research rocket. The rocket is to be launched from rest from the earth's surface and is to reach a maximum height of 960 m above the earth's surface. The rocket's engines give the rocket an upward acceleration of  $16.0 \text{ m/s}^2$  during the time  $T$  that they fire. After the engines shut off, the rocket is in free fall. Ignore air resistance. What must be the value of  $T$  in order for the rocket to reach the required altitude?

**2.79 •••** A helicopter carrying Dr. Evil takes off with a constant upward acceleration of  $5.0 \text{ m/s}^2$ . Secret agent Austin Powers jumps on just as the helicopter lifts off the ground. After the two men struggle for 10.0 s, Powers shuts off the engine and steps out of the helicopter. Assume that the helicopter is in free fall after its engine is shut off, and ignore the effects of air resistance. (a) What is the maximum height above ground reached by the helicopter? (b) Powers deploys a jet pack strapped on his back 7.0 s after leaving the helicopter, and then he has a constant downward acceleration with magnitude  $2.0 \text{ m/s}^2$ . How far is Powers above the ground when the helicopter crashes into the ground?

**2.80 •• Cliff Height.** You are climbing in the Altai when you suddenly find yourself at the edge of a fog-shrouded cliff. To find the height of this cliff, you drop a rock from the top; 8.00 s later you hear the sound of the rock hitting the ground at the foot of the cliff. (a) If you ignore air resistance, how high is the cliff if the speed of sound is  $330 \text{ m/s}$ ? (b) Suppose you had ignored the time it takes the sound to reach you. In that case, would you have overestimated or underestimated the height of the cliff? Explain.


**2.81 •• CALC** An object is moving along the  $x$ -axis. At  $t = 0$  it has velocity  $v_{0x} = 20.0 \text{ m/s}$ . Starting at time  $t = 0$  it has acceleration  $a_x = -Ct$ , where  $C$  has units of  $\text{m/s}^3$ . (a) What is the value of  $C$  if the object stops in 8.00 s after  $t = 0$ ? (b) For the value of  $C$  calculated in part (a), how far does the object travel during the 8.00 s?

**2.82 ••** A ball is thrown straight up from the ground with speed  $v_0$ . At the same instant, a second ball is dropped from rest from a height  $H$ , directly above the point where the first ball was thrown upward. There is no air resistance. (a) Find the time at which the two balls collide. (b) Find the value of  $H$  in terms of  $v_0$  and  $g$  such that at the instant when the balls collide, the first ball is at the highest point of its motion.

**2.83 • CALC** Cars  $A$  and  $B$  travel in a straight line. The distance of  $A$  from the starting point is given as a function of time by  $x_A(t) = \alpha t + \beta t^2$ , with  $\alpha = 2.60 \text{ m/s}$  and  $\beta = 1.20 \text{ m/s}^2$ . The distance of  $B$  from the starting point is  $x_B(t) = \gamma t^2 - \delta t^3$ , with  $\gamma = 2.80 \text{ m/s}^2$  and  $\delta = 0.20 \text{ m/s}^3$ . (a) Which car is ahead just after the two cars leave the starting point? (b) At what time(s) are the cars at the same point? (c) At what time(s) is the distance from  $A$  to  $B$  neither increasing nor decreasing? (d) At what time(s) do  $A$  and  $B$  have the same acceleration?

**2.84 •• DATA** In your physics lab you release a small glider from rest at various points on a long, frictionless air track that is inclined at an angle  $\theta$  above the horizontal. With an electronic photocell, you measure the time  $t$  it takes the glider to slide a distance  $x$  from the release point to the bottom of the track. Your measurements are given in **Fig. P2.84**, which shows a second-order polynomial (quadratic) fit to the plotted data. You are asked to find the glider's acceleration, which is assumed to be constant. There is some error in each measurement, so instead of using a single set of  $x$  and  $t$  values, you can be more accurate if you use graphical methods and obtain your measured value of the acceleration from the graph. (a) How can you re-graph the data so that the data points fall close to a straight line? (*Hint:* You might want to plot  $x$  or  $t$ , or both, raised to some power.) (b) Construct the graph you described in part (a) and find the equation for the straight line that is the best fit to the data points. (c) Use the straight-line fit from part (b) to calculate the acceleration of the glider. (d) The glider is released at a distance  $x = 1.35 \text{ m}$  from the bottom of the track. Use the acceleration value you obtained in part (c) to calculate the speed of the glider when it reaches the bottom of the track.

Figure P2.84

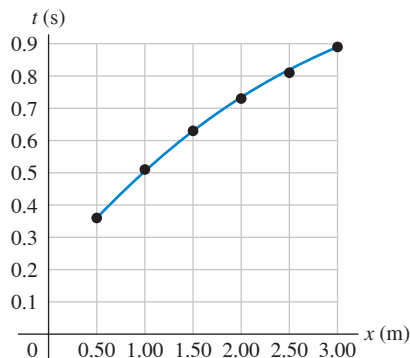

**2.85 •• DATA** In a physics lab experiment, you release a small steel ball at various heights above the ground and measure the ball's speed just before it strikes the ground. You plot your data on a graph that has the release height (in meters) on the vertical axis and the square of the final speed (in  $\text{m}^2/\text{s}^2$ ) on the horizontal axis. In this graph your data points lie close to a straight line. (a) Using  $g = 9.80 \text{ m/s}^2$  and ignoring the effect of air resistance, what is the numerical value of the slope of this straight line? (Include the correct units.) The presence of air resistance reduces the magnitude of the downward acceleration, and the effect of air resistance increases as the speed of the object increases. You repeat the experiment, but this time with a tennis ball as the object being dropped. Air resistance now has a noticeable effect on the data. (b) Is the final speed for a given release height higher than, lower than, or the same as when you ignored air resistance? (c) Is the graph of the release height versus the square of the final speed still a straight line? Sketch the qualitative shape of the graph when air resistance is present.

**2.86 ••• DATA** A model car starts from rest and travels in a straight line. A smartphone mounted on the car has an app that transmits the magnitude of the car's acceleration (measured by an accelerometer) every second. The results are given in the table:

Time (s)	Acceleration ( $\text{m/s}^2$ )
0	5.95
1.00	5.52
2.00	5.08
3.00	4.55
4.00	3.96
5.00	3.40

Each measured value has some experimental error. (a) Plot acceleration versus time and find the equation for the straight line that gives the best fit to the data. (b) Use the equation for  $a(t)$  that you found in part (a) to calculate  $v(t)$ , the speed of the car as a function of time. Sketch the graph of  $v$  versus  $t$ . Is this graph a straight line? (c) Use your result from part (b) to calculate the speed of the car at  $t = 5.00 \text{ s}$ . (d) Calculate the distance the car travels between  $t = 0$  and  $t = 5.00 \text{ s}$ .

## CHALLENGE PROBLEMS

**2.87 •••** In the vertical jump, an athlete starts from a crouch and jumps upward as high as possible. Even the best athletes spend little more than 1.00 s in the air (their "hang time"). Treat the athlete as a particle and let  $y_{\text{max}}$  be his maximum height above the floor. To explain why he seems to hang in the air, calculate the ratio of the time he is above  $y_{\text{max}}/2$  to the time it takes him to go from the floor to that height. Ignore air resistance.

**2.88 ••• Catching the Bus.** A student is running at her top speed of 5.0 m/s to catch a bus, which is stopped at the bus stop. When the student is still 40.0 m from the bus, it starts to pull away, moving with a constant acceleration of  $0.170 \text{ m/s}^2$ . (a) For how much time and what distance does the student have to run at 5.0 m/s before she overtakes the bus? (b) When she reaches the bus, how fast is the bus traveling? (c) Sketch an  $x$ - $t$  graph for both the student and the bus. Take  $x = 0$  at the initial position of the student. (d) The equations you used in part (a) to find the time have a second solution, corresponding to a later time for which the student and bus are again at the same place if they continue their specified motions. Explain the significance of this second solution. How fast is the bus traveling at this point? (e) If the student's top speed is 3.5 m/s, will she catch the bus? (f) What is the *minimum* speed the student must have to just catch up with the bus? For what time and what distance does she have to run in that case?

**2.89 •••** A ball is thrown straight up from the edge of the roof of a building. A second ball is dropped from the roof 1.00 s later. Ignore air resistance. (a) If the height of the building is 20.0 m, what must the initial speed of the first ball be if both are to hit the ground at the same time? On the same graph, sketch the positions of both balls as a function of time, measured from when the first ball is thrown. Consider the same situation, but now let the initial speed  $v_0$  of the first ball be given and treat the height  $h$  of the building as an unknown. (b) What must the height of the building be for both balls to reach the ground at the same time if (i)  $v_0$  is 6.0 m/s and (ii)  $v_0$  is 9.5 m/s? (c) If  $v_0$  is greater than some value  $v_{\text{max}}$ , no value of  $h$  exists that allows both balls to hit the ground at the same time. Solve for  $v_{\text{max}}$ . The value  $v_{\text{max}}$  has a simple physical interpretation. What is it? (d) If  $v_0$  is less than some value  $v_{\text{min}}$ , no value of  $h$  exists that allows both balls to hit the ground at the same time. Solve for  $v_{\text{min}}$ . The value  $v_{\text{min}}$  also has a simple physical interpretation. What is it?

## MCAT-STYLE PASSAGE PROBLEMS


**BIO Blood Flow in the Heart.** The human circulatory system is closed—that is, the blood pumped out of the left ventricle of the heart into the arteries is constrained to a series of continuous, branching vessels as it passes through the capillaries and then into the veins as it returns to the heart. The blood in each of the heart's four chambers comes briefly to rest before it is ejected by contraction of the heart muscle.

**2.90** If the contraction of the left ventricle lasts 250 ms and the speed of blood flow in the aorta (the large artery leaving the heart) is 0.80 m/s at the end of the contraction, what is the average acceleration of a red blood cell as it leaves the heart? (a)  $310 \text{ m/s}^2$ ; (b)  $31 \text{ m/s}^2$ ; (c)  $3.2 \text{ m/s}^2$ ; (d)  $0.32 \text{ m/s}^2$ .

**2.91** If the aorta (diameter  $d_a$ ) branches into two equal-sized arteries with a combined area equal to that of the aorta, what is the diameter of one of the branches? (a)  $\sqrt{d_a}$ ; (b)  $d_a/\sqrt{2}$ ; (c)  $2d_a$ ; (d)  $d_a/2$ .

**2.92** The velocity of blood in the aorta can be measured directly with ultrasound techniques. A typical graph of blood velocity versus time during a single heartbeat is shown in Fig. P2.92. Which statement is the best interpretation of this graph? (a) The blood flow changes direction at about 0.25 s; (b) the speed of the blood flow begins to decrease at about 0.10 s; (c) the acceleration of the blood is greatest in magnitude at about 0.25 s; (d) the acceleration of the blood is greatest in magnitude at about 0.10 s.

Figure P2.92

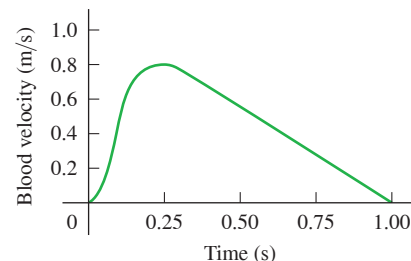

## ANSWERS

### Chapter Opening Question ?

(iii) Acceleration refers to *any* change in velocity, including both speeding up and slowing down.

### Key Example VARIATION Problems

**VP2.5.1** (a) 4.5 s (b) 81 m

**VP2.5.2** (a)  $4.80 \text{ m/s}^2$  (b) 375 m

**VP2.5.3** (a) 11.1 s (b) 222 m (c) 10.0 m/s

**VP2.5.4** (a)  $t = 2v_C/(a_T + a_C)$  (b)  $x = 2a_T v_C^2/(a_T + a_C)^2$

**VP2.7.1** (a)  $y = 3.16 \text{ m}$ ,  $v_y = 9.06 \text{ m/s}$ , above your hand and moving upward (b)  $y = -1.92 \text{ m}$ ,  $v_y = -13.5 \text{ m/s}$ , below your hand and moving downward

**VP2.7.2** (a)  $y = -23.0 \text{ m}$ ,  $v_y = -22.7 \text{ m/s}$  (b)  $v_y = -14.9 \text{ m/s}$

**VP2.7.3** (a) 8.87 m/s (b) 0.854 s

**VP2.7.4** (a)  $\sqrt{2gH}$  (b)  $\sqrt{gH} = 1/\sqrt{2} = 0.707$  times the speed at which it left your hand (c)  $3H/4$

**VP2.8.1** (a) 0.398 s and 2.05 s (b) 2.75 s

**VP2.8.2** 0.447 s

**VP2.8.3** (a) two;  $t = 0.338 \text{ s}$  (moving upward) and  $t = 0.784 \text{ s}$  (moving downward) (b) none

**VP2.8.4** (a)  $t = v_0/g$  (neither upward nor downward) (b)  $t = v_0/2g$  (upward),  $t = 3v_0/2g$  (downward)

### Bridging Problem

$h = 57.1 \text{ m}$

- ? If a cyclist is going around a curve at constant speed, is he accelerating? If so, what is the direction of his acceleration?
- (i) No;
  - (ii) yes, in the direction of his motion;
  - (iii) yes, toward the inside of the curve;
  - (iv) yes, toward the outside of the curve;
  - (v) yes, but in some other direction.



# 3 Motion in Two or Three Dimensions

## LEARNING OUTCOMES

*In this chapter, you'll learn...*

- 3.1 How to use vectors to represent the position and velocity of a particle in two or three dimensions.
- 3.2 How to find the vector acceleration of a particle, why a particle can have an acceleration even if its speed is constant, and how to interpret the components of acceleration parallel and perpendicular to a particle's path.
- 3.3 How to solve problems that involve the curved path followed by a projectile.
- 3.4 How to analyze motion in a circular path, with either constant speed or varying speed.
- 3.5 How to relate the velocities of a moving object as seen from two different frames of reference.

*You'll need to review...*

- 2.1 Average  $x$ -velocity.
- 2.2 Instantaneous  $x$ -velocity.
- 2.3 Average and instantaneous  $x$ -acceleration.
- 2.4 Straight-line motion with constant acceleration.
- 2.5 The motion of freely falling objects.

What determines where a batted baseball lands? How do you describe the motion of a roller coaster car along a curved track or the flight of a circling hawk? Which hits the ground first: a cricket ball that you simply drop or one that you throw horizontally?

We can't answer these kinds of questions by using the techniques of Chapter 2, in which particles moved only along a straight line. Instead, we need to extend our descriptions of motion to two- and three-dimensional situations. We'll still use the vector quantities displacement, velocity, and acceleration, but now these quantities will no longer lie along a single line. We'll find that several important kinds of motion take place in two dimensions only—that is, in a *plane*.

We also need to consider how the motion of a particle is described by different observers who are moving relative to each other. The concept of *relative velocity* will play an important role later in the book when we explore electromagnetic phenomena and when we introduce Einstein's special theory of relativity.

This chapter merges the vector mathematics of Chapter 1 with the kinematic language of Chapter 2. As before, we're concerned with describing motion, not with analyzing its causes. But the language you learn here will be an essential tool in later chapters when we study the relationship between force and motion.

## 3.1 POSITION AND VELOCITY VECTORS

Let's see how to describe a particle's motion in space. If the particle is at a point  $P$  at a certain instant, the **position vector**  $\vec{r}$  of the particle at this instant is a vector that goes from the origin of the coordinate system to point  $P$  (Fig. 3.1). The Cartesian coordinates  $x$ ,  $y$ , and  $z$  of point  $P$  are the  $x$ -,  $y$ -, and  $z$ -components of vector  $\vec{r}$ . Using the unit vectors we introduced in Section 1.9, we can write

$$\vec{r} = x\hat{i} + y\hat{j} + z\hat{k} \quad (3.1)$$

Position vector of a particle at a given instant
Unit vectors in  $x$ -,  $y$ -, and  $z$ -directions
Coordinates of particle's position



During a time interval  $\Delta t$  the particle moves from  $P_1$ , where its position vector is  $\vec{r}_1$ , to  $P_2$ , where its position vector is  $\vec{r}_2$ . The change in position (the displacement) during this interval is  $\Delta\vec{r} = \vec{r}_2 - \vec{r}_1 = (x_2 - x_1)\hat{i} + (y_2 - y_1)\hat{j} + (z_2 - z_1)\hat{k}$ . We define the **average velocity**  $\vec{v}_{\text{av}}$  during this interval in the same way we did in Chapter 2 for straight-line motion, as the displacement divided by the time interval (Fig. 3.2):

$$\vec{v}_{\text{av}} = \frac{\Delta\vec{r}}{\Delta t} = \frac{\vec{r}_2 - \vec{r}_1}{t_2 - t_1} \quad (3.2)$$

Change in the particle's position vector
Final position minus initial position

Average velocity vector of a particle during time interval from  $t_1$  to  $t_2$ 
Time interval
Final time minus initial time

Dividing a vector by a scalar is a special case of *multiplying* a vector by a scalar, described in Section 1.7; the average velocity  $\vec{v}_{\text{av}}$  is equal to the displacement vector  $\Delta\vec{r}$  multiplied by  $1/\Delta t$ . Note that the  $x$ -component of Eq. (3.2) is  $v_{\text{av},x} = (x_2 - x_1)/(t_2 - t_1) = \Delta x/\Delta t$ . This is just Eq. (2.2), the expression for average  $x$ -velocity that we found in Section 2.1 for one-dimensional motion.

We now define **instantaneous velocity** just as we did in Chapter 2: It equals the instantaneous rate of change of position with time. The key difference is that both position  $\vec{r}$  and instantaneous velocity  $\vec{v}$  are now vectors:

$$\vec{v} = \lim_{\Delta t \rightarrow 0} \frac{\Delta\vec{r}}{\Delta t} = \frac{d\vec{r}}{dt} \quad (3.3)$$

The instantaneous velocity vector of a particle ...
... equals the limit of its average velocity vector as the time interval approaches zero ...
... and equals the instantaneous rate of change of its position vector.

At any instant, the *magnitude* of  $\vec{v}$  is the *speed*  $v$  of the particle at that instant, and the *direction* of  $\vec{v}$  is the direction in which the particle is moving at that instant.

As  $\Delta t \rightarrow 0$ , points  $P_1$  and  $P_2$  in Fig. 3.2 move closer and closer together. In this limit, the vector  $\Delta\vec{r}$  becomes tangent to the path. The direction of  $\Delta\vec{r}$  in this limit is also the direction of  $\vec{v}$ . So *at every point along the path, the instantaneous velocity vector is tangent to the path at that point* (Fig. 3.3).

It's often easiest to calculate the instantaneous velocity vector by using components. During any displacement  $\Delta\vec{r}$ , the changes  $\Delta x$ ,  $\Delta y$ , and  $\Delta z$  in the three coordinates of the particle are the *components* of  $\Delta\vec{r}$ . It follows that the components  $v_x$ ,  $v_y$ , and  $v_z$  of the instantaneous velocity  $\vec{v} = v_x\hat{i} + v_y\hat{j} + v_z\hat{k}$  are simply the time derivatives of the coordinates  $x$ ,  $y$ , and  $z$ :

$$v_x = \frac{dx}{dt}, \quad v_y = \frac{dy}{dt}, \quad v_z = \frac{dz}{dt} \quad (3.4)$$

Each component of a particle's instantaneous velocity vector ...
... equals the instantaneous rate of change of its corresponding coordinate.

The  $x$ -component of  $\vec{v}$  is  $v_x = dx/dt$ , which is the same as Eq. (2.3) for straight-line motion (see Section 2.2). Hence Eq. (3.4) is a direct extension of instantaneous velocity to motion in three dimensions.

We can also get Eq. (3.4) by taking the derivative of Eq. (3.1). The unit vectors  $\hat{i}$ ,  $\hat{j}$ , and  $\hat{k}$  don't depend on time, so their derivatives are zero and we find

$$\vec{v} = \frac{d\vec{r}}{dt} = \frac{dx}{dt}\hat{i} + \frac{dy}{dt}\hat{j} + \frac{dz}{dt}\hat{k} \quad (3.5)$$

This shows again that the components of  $\vec{v}$  are  $dx/dt$ ,  $dy/dt$ , and  $dz/dt$ .

The magnitude of the instantaneous velocity vector  $\vec{v}$ —that is, the speed—is given in terms of the components  $v_x$ ,  $v_y$ , and  $v_z$  by the Pythagorean relationship:

$$|\vec{v}| = v = \sqrt{v_x^2 + v_y^2 + v_z^2} \quad (3.6)$$

Figure 3.1 The position vector  $\vec{r}$  from origin  $O$  to point  $P$  has components  $x$ ,  $y$ , and  $z$ .

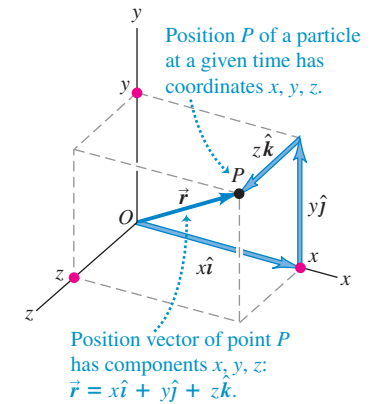


Figure 3.2 The average velocity  $\vec{v}_{\text{av}}$  between points  $P_1$  and  $P_2$  has the same direction as the displacement  $\Delta\vec{r}$ .

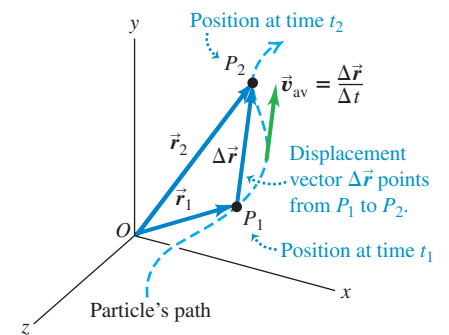


Figure 3.3 The vectors  $\vec{v}_1$  and  $\vec{v}_2$  are the instantaneous velocities at the points  $P_1$  and  $P_2$  shown in Fig. 3.2.

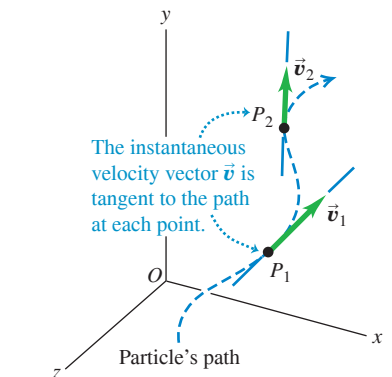


Figure 3.4 The two velocity components for motion in the  $xy$ -plane.

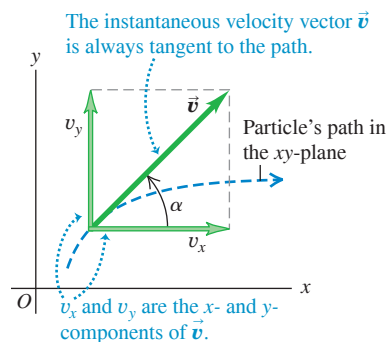


Figure 3.4 shows the situation when the particle moves in the  $xy$ -plane. In this case,  $z$  and  $v_z$  are zero. Then the speed (the magnitude of  $\vec{v}$ ) is

$$v = \sqrt{v_x^2 + v_y^2}$$

and the direction of the instantaneous velocity  $\vec{v}$  is given by angle  $\alpha$  (the Greek letter alpha) in the figure. We see that

$$\tan \alpha = \frac{v_y}{v_x} \quad (3.7)$$

(We use  $\alpha$  for the direction of the instantaneous velocity vector to avoid confusion with the direction  $\theta$  of the *position* vector of the particle.)

From now on, when we use the word “velocity,” we’ll always mean the *instantaneous* velocity vector  $\vec{v}$  (rather than the average velocity vector). Usually, we won’t even bother to call  $\vec{v}$  a vector; it’s up to you to remember that velocity is a vector quantity with both magnitude and direction.

### EXAMPLE 3.1 Calculating average and instantaneous velocity

A robotic vehicle, or rover, is exploring the surface of Mars. The stationary Mars lander is the origin of coordinates, and the surrounding Martian surface lies in the  $xy$ -plane. The rover, which we represent as a point, has  $x$ - and  $y$ -coordinates that vary with time:

$$\begin{aligned} x &= 2.0 \text{ m} - (0.25 \text{ m/s}^2)t^2 \\ y &= (1.0 \text{ m/s})t + (0.025 \text{ m/s}^3)t^3 \end{aligned}$$

(a) Find the rover’s coordinates and distance from the lander at  $t = 2.0$  s. (b) Find the rover’s displacement and average velocity vectors for the interval  $t = 0.0$  s to  $t = 2.0$  s. (c) Find a general expression for the rover’s instantaneous velocity vector  $\vec{v}$ . Express  $\vec{v}$  at  $t = 2.0$  s in component form and in terms of magnitude and direction.

**IDENTIFY and SET UP** This problem involves motion in two dimensions, so we must use the vector equations obtained in this section. Figure 3.5 shows the rover’s path (dashed line). We’ll use Eq. (3.1) for position  $\vec{r}$ , the expression  $\Delta\vec{r} = \vec{r}_2 - \vec{r}_1$  for displacement, Eq. (3.2) for average velocity, and Eqs. (3.5), (3.6), and (3.7) for instantaneous velocity and its magnitude and direction.

**EXECUTE** (a) At  $t = 2.0$  s the rover’s coordinates are

$$\begin{aligned} x &= 2.0 \text{ m} - (0.25 \text{ m/s}^2)(2.0 \text{ s})^2 = 1.0 \text{ m} \\ y &= (1.0 \text{ m/s})(2.0 \text{ s}) + (0.025 \text{ m/s}^3)(2.0 \text{ s})^3 = 2.2 \text{ m} \end{aligned}$$

The rover’s distance from the origin at this time is

$$r = \sqrt{x^2 + y^2} = \sqrt{(1.0 \text{ m})^2 + (2.2 \text{ m})^2} = 2.4 \text{ m}$$

(b) To find the displacement and average velocity over the given time interval, we first express the position vector  $\vec{r}$  as a function of time  $t$ . From Eq. (3.1) this is

$$\begin{aligned} \vec{r} &= x\hat{i} + y\hat{j} \\ &= [2.0 \text{ m} - (0.25 \text{ m/s}^2)t^2]\hat{i} + [(1.0 \text{ m/s})t + (0.025 \text{ m/s}^3)t^3]\hat{j} \end{aligned}$$


At  $t = 0.0$  s the position vector  $\vec{r}_0$  is

$$\vec{r}_0 = (2.0 \text{ m})\hat{i} + (0.0 \text{ m})\hat{j}$$

From part (a), the position vector  $\vec{r}_2$  at  $t = 2.0$  s is

$$\vec{r}_2 = (1.0 \text{ m})\hat{i} + (2.2 \text{ m})\hat{j}$$

Figure 3.5 At  $t = 0.0$  s the rover has position vector  $\vec{r}_0$  and instantaneous velocity vector  $\vec{v}_0$ . Likewise,  $\vec{r}_1$  and  $\vec{v}_1$  are the vectors at  $t = 1.0$  s;  $\vec{r}_2$  and  $\vec{v}_2$  are the vectors at  $t = 2.0$  s.

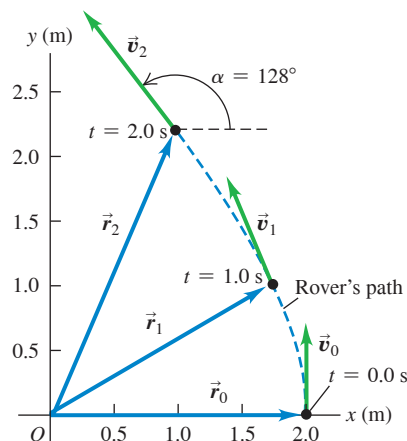

The displacement from  $t = 0.0$  s to  $t = 2.0$  s is therefore

$$\begin{aligned} \Delta\vec{r} &= \vec{r}_2 - \vec{r}_0 = (1.0 \text{ m})\hat{i} + (2.2 \text{ m})\hat{j} - (2.0 \text{ m})\hat{i} \\ &= (-1.0 \text{ m})\hat{i} + (2.2 \text{ m})\hat{j} \end{aligned}$$

During this interval the rover moves 1.0 m in the negative  $x$ -direction and 2.2 m in the positive  $y$ -direction. From Eq. (3.2), the average velocity over this interval is the displacement divided by the elapsed time:

$$\begin{aligned} \vec{v}_{\text{av}} &= \frac{\Delta\vec{r}}{\Delta t} = \frac{(-1.0 \text{ m})\hat{i} + (2.2 \text{ m})\hat{j}}{2.0 \text{ s} - 0.0 \text{ s}} \\ &= (-0.50 \text{ m/s})\hat{i} + (1.1 \text{ m/s})\hat{j} \end{aligned}$$

The components of this average velocity are  $v_{\text{av-}x} = -0.50$  m/s and  $v_{\text{av-}y} = 1.1$  m/s.

(c) From Eq. (3.4) the components of *instantaneous* velocity are the time derivatives of the coordinates:

$$\begin{aligned} v_x &= \frac{dx}{dt} = (-0.25 \text{ m/s}^2)(2t) \\ v_y &= \frac{dy}{dt} = 1.0 \text{ m/s} + (0.025 \text{ m/s}^3)(3t^2) \end{aligned}$$

Hence the instantaneous velocity vector is

$$\begin{aligned}\vec{v} &= v_x \hat{i} + v_y \hat{j} \\ &= (-0.50 \text{ m/s}^2)t \hat{i} + [1.0 \text{ m/s} + (0.075 \text{ m/s}^3)t^2] \hat{j}\end{aligned}$$

At  $t = 2.0$  s the velocity vector  $\vec{v}_2$  has components

$$\begin{aligned}v_{2x} &= (-0.50 \text{ m/s}^2)(2.0 \text{ s}) = -1.0 \text{ m/s} \\ v_{2y} &= 1.0 \text{ m/s} + (0.075 \text{ m/s}^3)(2.0 \text{ s})^2 = 1.3 \text{ m/s}\end{aligned}$$

The magnitude of the instantaneous velocity (that is, the speed) at  $t = 2.0$  s is

$$v_2 = \sqrt{v_{2x}^2 + v_{2y}^2} = \sqrt{(-1.0 \text{ m/s})^2 + (1.3 \text{ m/s})^2} = 1.6 \text{ m/s}$$

Figure 3.5 shows the direction of velocity vector  $\vec{v}_2$ , which is at an angle  $\alpha$  between  $90^\circ$  and  $180^\circ$  with respect to the positive  $x$ -axis. From Eq. (3.7) we have

$$\arctan \frac{v_y}{v_x} = \arctan \frac{1.3 \text{ m/s}}{-1.0 \text{ m/s}} = -52^\circ$$

This is off by  $180^\circ$ ; the correct value is  $\alpha = 180^\circ - 52^\circ = 128^\circ$ , or  $38^\circ$  west of north.

**EVALUATE** Compare the components of *average* velocity from part (b) for the interval from  $t = 0.0$  s to  $t = 2.0$  s ( $v_{\text{av-}x} = -0.50$  m/s,  $v_{\text{av-}y} = 1.1$  m/s) with the components of *instantaneous* velocity at  $t = 2.0$  s from part (c) ( $v_{2x} = -1.0$  m/s,  $v_{2y} = 1.3$  m/s). Just as in one dimension, the average velocity vector  $\vec{v}_{\text{av}}$  over an interval is in general *not* equal to the instantaneous velocity  $\vec{v}$  at the end of the interval (see Example 2.1).

Figure 3.5 shows the position vectors  $\vec{r}$  and instantaneous velocity vectors  $\vec{v}$  at  $t = 0.0$  s,  $1.0$  s, and  $2.0$  s. (Calculate these quantities for  $t = 0.0$  s and  $t = 1.0$  s.) Notice that  $\vec{v}$  is tangent to the path at every point. The magnitude of  $\vec{v}$  increases as the rover moves, which means that its speed is increasing.

**KEYCONCEPT** To calculate the average velocity vector of an object, first find its displacement vector during a time interval. Then divide by the time interval. To calculate the object's instantaneous velocity vector (its average velocity vector over an infinitesimally short time interval), take the derivative of its position vector with respect to time.

**TEST YOUR UNDERSTANDING OF SECTION 3.1** In which of these situations *would* the average velocity vector  $\vec{v}_{\text{av}}$  over an interval be equal to the instantaneous velocity  $\vec{v}$  at the end of the interval? (i) An object moving along a curved path at constant speed; (ii) an object moving along a curved path and speeding up; (iii) an object moving along a straight line at constant speed; (iv) an object moving along a straight line and speeding up.

### ANSWER


(iii) If the instantaneous velocity  $\vec{v}$  is constant over an interval, its value at any point (including the end of the interval) is the same as the average velocity  $\vec{v}_{\text{av}}$  over the interval. In (i) and (ii) the direction of  $\vec{v}$  at the end of the interval is tangent to the path at that point, while the direction of  $\vec{v}_{\text{av}}$  points from the beginning of the path to its end (in the direction of the net displacement). In (iv) both  $\vec{v}$  and  $\vec{v}_{\text{av}}$  are directed along the straight line, but  $\vec{v}$  has a greater magnitude because the speed has been increasing.

## 3.2 THE ACCELERATION VECTOR

Now let's consider the *acceleration* of a particle moving in space. Just as for motion in a straight line, acceleration describes how the velocity of the particle changes. But since we now treat velocity as a vector, acceleration will describe changes in the velocity magnitude (that is, the speed) *and* changes in the direction of velocity (that is, the direction in which the particle is moving).

In **Fig. 3.6a**, a car (treated as a particle) is moving along a curved road. Vectors  $\vec{v}_1$  and  $\vec{v}_2$  represent the car's instantaneous velocities at time  $t_1$ , when the car is at point


Figure 3.6 (a) A car moving along a curved road from  $P_1$  to  $P_2$ . (b) How to obtain the change in velocity  $\Delta\vec{v} = \vec{v}_2 - \vec{v}_1$  by vector subtraction. (c) The vector  $\vec{a}_{\text{av}} = \Delta\vec{v}/\Delta t$  represents the average acceleration between  $P_1$  and  $P_2$ .

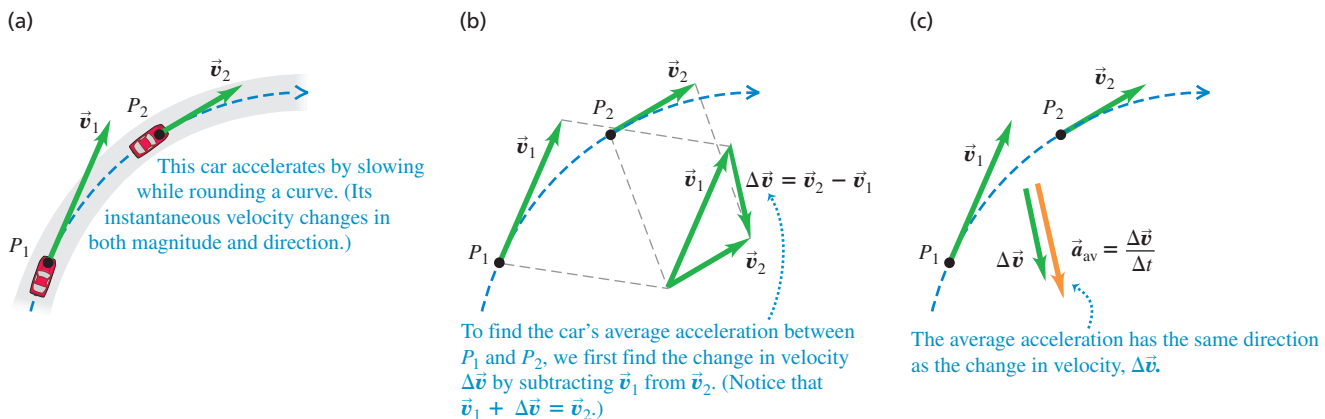


$P_1$ , and at time  $t_2$ , when the car is at point  $P_2$ . During the time interval from  $t_1$  to  $t_2$ , the *vector change in velocity* is  $\vec{v}_2 - \vec{v}_1 = \Delta\vec{v}$ , so  $\vec{v}_2 = \vec{v}_1 + \Delta\vec{v}$  (Fig. 3.6b). The **average acceleration**  $\vec{a}_{av}$  of the car during this time interval is the velocity change divided by the time interval  $t_2 - t_1 = \Delta t$ :

Figure 3.7 (a) Instantaneous acceleration  $\vec{a}$  at point  $P_1$  in Fig. 3.6. (b) Instantaneous acceleration for motion along a straight line.

(a) Acceleration: curved trajectory

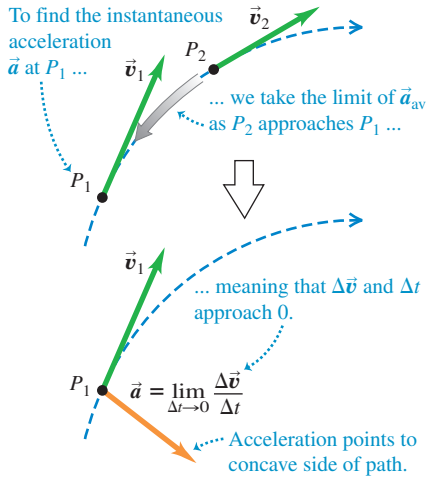

(b) Acceleration: straight-line trajectory

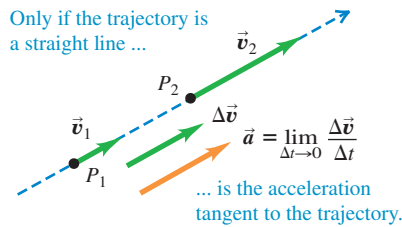

$$\vec{a}_{av} = \frac{\Delta\vec{v}}{\Delta t} = \frac{\vec{v}_2 - \vec{v}_1}{t_2 - t_1} \quad (3.8)$$

Average acceleration vector of a particle during time interval from  $t_1$  to  $t_2$  is  $\vec{a}_{av}$ . Change in the particle's velocity is  $\Delta\vec{v} = \vec{v}_2 - \vec{v}_1$ . Time interval is  $\Delta t = t_2 - t_1$ . Final velocity minus initial velocity is  $\vec{v}_2 - \vec{v}_1$ . Final time minus initial time is  $t_2 - t_1$ .

Average acceleration is a *vector* quantity in the same direction as  $\Delta\vec{v}$  (Fig. 3.6c). The  $x$ -component of Eq. (3.8) is  $a_{av-x} = (v_{2x} - v_{1x})/(t_2 - t_1) = \Delta v_x/\Delta t$ , which is just Eq. (2.4) for average acceleration in straight-line motion.

As in Chapter 2, we define the **instantaneous acceleration**  $\vec{a}$  (a *vector* quantity) at point  $P_1$  as the limit of the average acceleration vector when point  $P_2$  approaches point  $P_1$ , so both  $\Delta\vec{v}$  and  $\Delta t$  approach zero (**Fig. 3.7**):

$$\vec{a} = \lim_{\Delta t \rightarrow 0} \frac{\Delta\vec{v}}{\Delta t} = \frac{d\vec{v}}{dt} \quad (3.9)$$

The instantaneous acceleration vector of a particle ... equals the limit of its average acceleration vector as the time interval approaches zero ... and equals the instantaneous rate of change of its velocity vector.

The velocity vector  $\vec{v}$  is always tangent to the particle's path, but the instantaneous acceleration vector  $\vec{a}$  does *not* have to be tangent to the path. If the path is curved,  $\vec{a}$  points toward the concave side of the path—that is, toward the inside of any turn that the particle is making (Fig. 3.7a). The acceleration is tangent to the path only if the particle moves in a straight line (Fig. 3.7b).

**CAUTION** Any particle following a curved path is accelerating When a particle is moving in a curved path, it always has nonzero acceleration, even when it moves with constant speed. This conclusion is contrary to the everyday use of the word “acceleration” to mean that speed is increasing. The more precise definition given in Eq. (3.9) shows that there is a nonzero acceleration whenever the velocity vector changes in *any* way, whether there is a change of speed, direction, or both. ■

**BIO APPLICATION** **Horses on a Curved Path** By leaning to the side and hitting the ground with their hooves at an angle, these horses give themselves the sideways acceleration necessary to make a sharp change in direction.



To convince yourself that a particle is accelerating as it moves on a curved path with constant speed, think of your sensations when you ride in a car. When the car accelerates, you tend to move inside the car in a direction *opposite* to the car's acceleration. (In Chapter 4 we'll learn why this is so.) Thus you tend to slide toward the back of the car when it accelerates forward (speeds up) and toward the front of the car when it accelerates backward (slows down). If the car makes a turn on a level road, you tend to slide toward the outside of the turn; hence the car is accelerating toward the inside of the turn.

We'll usually be interested in instantaneous acceleration, not average acceleration. From now on, we'll use the term “acceleration” to mean the instantaneous acceleration vector  $\vec{a}$ .

Each component of the acceleration vector  $\vec{a} = a_x\hat{i} + a_y\hat{j} + a_z\hat{k}$  is the derivative of the corresponding component of velocity:

$$a_x = \frac{dv_x}{dt} \quad a_y = \frac{dv_y}{dt} \quad a_z = \frac{dv_z}{dt} \quad (3.10)$$

Each component of a particle's instantaneous acceleration vector ... equals the instantaneous rate of change of its corresponding velocity component.

In terms of unit vectors,


$$\vec{a} = \frac{d\vec{v}}{dt} = \frac{dv_x}{dt}\hat{i} + \frac{dv_y}{dt}\hat{j} + \frac{dv_z}{dt}\hat{k} \quad (3.11)$$

The  $x$ -component of Eqs. (3.10) and (3.11),  $a_x = dv_x/dt$ , is just Eq. (2.5) for instantaneous acceleration in one dimension. **Figure 3.8** shows an example of an acceleration vector that has both  $x$ - and  $y$ -components.

Since each component of velocity is the derivative of the corresponding coordinate, we can express the components  $a_x$ ,  $a_y$ , and  $a_z$  of the acceleration vector  $\vec{a}$  as

$$a_x = \frac{d^2x}{dt^2} \quad a_y = \frac{d^2y}{dt^2} \quad a_z = \frac{d^2z}{dt^2} \quad (3.12)$$

**Figure 3.8** When the fingers release the arrow, its acceleration vector has a horizontal component ( $a_x$ ) and a vertical component ( $a_y$ ).



### EXAMPLE 3.2 Calculating average and instantaneous acceleration

Let's return to the motions of the Mars rover in Example 3.1. (a) Find the components of the average acceleration for the interval  $t = 0.0$  s to  $t = 2.0$  s. (b) Find the instantaneous acceleration at  $t = 2.0$  s.

**IDENTIFY and SET UP** In Example 3.1 we found the components of the rover's instantaneous velocity at any time  $t$ :

$$v_x = \frac{dx}{dt} = (-0.25 \text{ m/s}^2)(2t) = (-0.50 \text{ m/s}^2)t$$

$$v_y = \frac{dy}{dt} = 1.0 \text{ m/s} + (0.025 \text{ m/s}^3)(3t^2) = 1.0 \text{ m/s} + (0.075 \text{ m/s}^3)t^2$$

We'll use the vector relationships among velocity, average acceleration, and instantaneous acceleration. In part (a) we determine the values of  $v_x$  and  $v_y$  at the beginning and end of the interval and then use Eq. (3.8) to calculate the components of the average acceleration. In part (b) we obtain expressions for the instantaneous acceleration components at any time  $t$  by taking the time derivatives of the velocity components as in Eqs. (3.10).

**EXECUTE** (a) In Example 3.1 we found that at  $t = 0.0$  s the velocity components are

$$v_x = 0.0 \text{ m/s} \quad v_y = 1.0 \text{ m/s}$$

and that at  $t = 2.0$  s the components are

$$v_x = -1.0 \text{ m/s} \quad v_y = 1.3 \text{ m/s}$$

Thus the components of average acceleration in the interval  $t = 0.0$  s to  $t = 2.0$  s are

$$a_{\text{av-}x} = \frac{\Delta v_x}{\Delta t} = \frac{-1.0 \text{ m/s} - 0.0 \text{ m/s}}{2.0 \text{ s} - 0.0 \text{ s}} = -0.50 \text{ m/s}^2$$

$$a_{\text{av-}y} = \frac{\Delta v_y}{\Delta t} = \frac{1.3 \text{ m/s} - 1.0 \text{ m/s}}{2.0 \text{ s} - 0.0 \text{ s}} = 0.15 \text{ m/s}^2$$

(b) Using Eqs. (3.10), we find

$$a_x = \frac{dv_x}{dt} = -0.50 \text{ m/s}^2 \quad a_y = \frac{dv_y}{dt} = (0.075 \text{ m/s}^3)(2t)$$

Hence the instantaneous acceleration vector  $\vec{a}$  at time  $t$  is


$$\vec{a} = a_x\hat{i} + a_y\hat{j} = (-0.50 \text{ m/s}^2)\hat{i} + (0.15 \text{ m/s}^3)t\hat{j}$$

At  $t = 2.0$  s the components of acceleration and the acceleration vector are

$$a_x = -0.50 \text{ m/s}^2 \quad a_y = (0.15 \text{ m/s}^3)(2.0 \text{ s}) = 0.30 \text{ m/s}^2$$

$$\vec{a} = (-0.50 \text{ m/s}^2)\hat{i} + (0.30 \text{ m/s}^2)\hat{j}$$

**Figure 3.9** The path of the robotic rover, showing the velocity and acceleration at  $t = 0.0$  s ( $\vec{v}_0$  and  $\vec{a}_0$ ),  $t = 1.0$  s ( $\vec{v}_1$  and  $\vec{a}_1$ ), and  $t = 2.0$  s ( $\vec{v}_2$  and  $\vec{a}_2$ ).

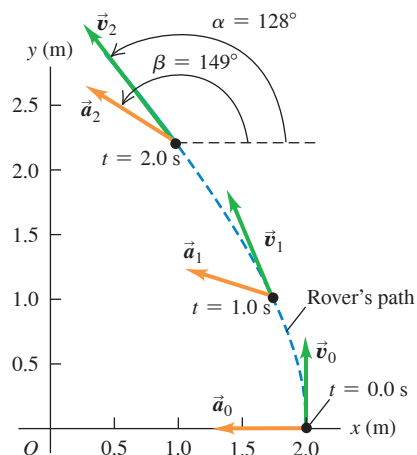

The magnitude of acceleration at this time is

$$a = \sqrt{a_x^2 + a_y^2} = \sqrt{(-0.50 \text{ m/s}^2)^2 + (0.30 \text{ m/s}^2)^2} = 0.58 \text{ m/s}^2$$

A sketch of this vector (**Fig. 3.9**) shows that the direction angle  $\beta$  of  $\vec{a}$  with respect to the positive  $x$ -axis is between  $90^\circ$  and  $180^\circ$ . From Eq. (3.7) we have

$$\arctan \frac{a_y}{a_x} = \arctan \frac{0.30 \text{ m/s}^2}{-0.50 \text{ m/s}^2} = -31^\circ$$

Hence  $\beta = 180^\circ + (-31^\circ) = 149^\circ$ .

**EVALUATE** Figure 3.9 shows the rover's path and the velocity and acceleration vectors at  $t = 0.0$  s,  $1.0$  s, and  $2.0$  s. (Use the results of part (b) to calculate the instantaneous acceleration at  $t = 0.0$  s and  $t = 1.0$  s for yourself.) Note that  $\vec{v}$  and  $\vec{a}$  are *not* in the same direction at any of these times. The velocity vector  $\vec{v}$  is tangent to the path at each point (as is always the case), and the acceleration vector  $\vec{a}$  points toward the concave side of the path.

**KEYCONCEPT** To calculate the average acceleration vector of an object, first find the change in its velocity vector (final velocity minus initial velocity) during a time interval. Then divide by the time interval. To calculate the object's instantaneous acceleration vector (its average velocity vector over an infinitesimally short time interval), take the derivative of its velocity vector with respect to time.

Figure 3.10 The acceleration can be resolved into a component  $a_{\parallel}$  parallel to the path (that is, along the tangent to the path) and a component  $a_{\perp}$  perpendicular to the path (that is, along the normal to the path).



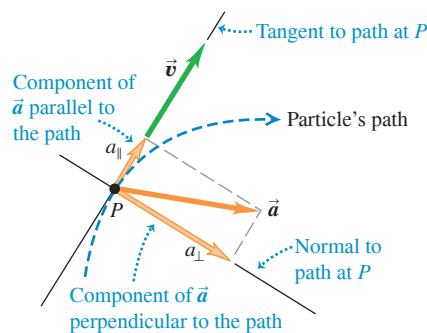


Figure 3.11 The effect of acceleration directed (a) parallel to and (b) perpendicular to a particle's velocity.

(a) Acceleration parallel to velocity

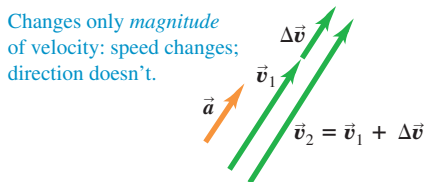

(b) Acceleration perpendicular to velocity

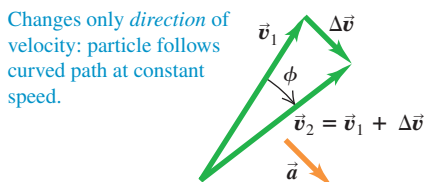

### Parallel and Perpendicular Components of Acceleration

Equations (3.10) tell us about the components of a particle's instantaneous acceleration vector  $\vec{a}$  along the  $x$ -,  $y$ -, and  $z$ -axes. Another useful way to think about  $\vec{a}$  is in terms of one component *parallel* to the particle's path and to its velocity  $\vec{v}$ , and one component *perpendicular* to the path and to  $\vec{v}$  (Fig. 3.10). That's because the parallel component  $a_{\parallel}$  tells us about changes in the particle's *speed*, while the perpendicular component  $a_{\perp}$  tells us about changes in the particle's *direction of motion*. To see why the parallel and perpendicular components of  $\vec{a}$  have these properties, let's consider two special cases.

In Fig. 3.11a the acceleration vector is in the same direction as the velocity  $\vec{v}_1$ , so  $\vec{a}$  has only a parallel component  $a_{\parallel}$  (that is,  $a_{\perp} = 0$ ). The velocity change  $\Delta\vec{v}$  during a small time interval  $\Delta t$  is in the same direction as  $\vec{a}$  and hence in the same direction as  $\vec{v}_1$ . The velocity  $\vec{v}_2$  at the end of  $\Delta t$  is in the same direction as  $\vec{v}_1$  but has greater magnitude. Hence during the time interval  $\Delta t$  the particle in Fig. 3.11a moved in a straight line with increasing speed (compare Fig. 3.7b).


In Fig. 3.11b the acceleration is *perpendicular* to the velocity, so  $\vec{a}$  has only a perpendicular component  $a_{\perp}$  (that is,  $a_{\parallel} = 0$ ). In a small time interval  $\Delta t$ , the velocity change  $\Delta\vec{v}$  is very nearly perpendicular to  $\vec{v}_1$ , and so  $\vec{v}_1$  and  $\vec{v}_2$  have different directions. As the time interval  $\Delta t$  approaches zero, the angle  $\phi$  in the figure also approaches zero,  $\Delta\vec{v}$  becomes perpendicular to *both*  $\vec{v}_1$  and  $\vec{v}_2$ , and  $\vec{v}_1$  and  $\vec{v}_2$  have the same magnitude. In other words, the speed of the particle stays the same, but the direction of motion changes and the path of the particle curves.

In the most general case, the acceleration  $\vec{a}$  has *both* components parallel and perpendicular to the velocity  $\vec{v}$ , as in Fig. 3.10. Then the particle's speed will change (described by the parallel component  $a_{\parallel}$ ) and its direction of motion will change (described by the perpendicular component  $a_{\perp}$ ).


Figure 3.12 shows a particle moving along a curved path for three situations: constant speed, increasing speed, and decreasing speed. If the speed is constant,  $\vec{a}$  is perpendicular, or *normal*, to the path and to  $\vec{v}$  and points toward the concave side of the path (Fig. 3.12a). If the speed is increasing, there is still a perpendicular component of  $\vec{a}$ , but there is also a parallel component with the same direction as  $\vec{v}$  (Fig. 3.12b). Then  $\vec{a}$  points ahead of the normal to the path. (This was the case in Example 3.2.) If the speed is decreasing, the parallel component has the direction opposite to  $\vec{v}$ , and  $\vec{a}$  points behind the normal to the path (Fig. 3.12c; compare Fig. 3.7a). We'll use these ideas again in Section 3.4 when we study the special case of motion in a circle.

Figure 3.12 Velocity and acceleration vectors for a particle moving through a point  $P$  on a curved path with (a) constant speed, (b) increasing speed, and (c) decreasing speed.


(a) When speed is constant along a curved path ...



(b) When speed is increasing along a curved path ...



(c) When speed is decreasing along a curved path ...



**EXAMPLE 3.3** Calculating parallel and perpendicular components of acceleration

For the rover of Examples 3.1 and 3.2, find the parallel and perpendicular components of the acceleration at  $t = 2.0$  s.

**IDENTIFY and SET UP** We want to find the components of the acceleration vector  $\vec{a}$  that are parallel and perpendicular to velocity vector  $\vec{v}$ . We found the directions of  $\vec{v}$  and  $\vec{a}$  in Examples 3.1 and 3.2, respectively; Fig. 3.9 shows the results. From these directions we can find the angle between the two vectors and the components of  $\vec{a}$  with respect to the direction of  $\vec{v}$ .


**EXECUTE** From Example 3.2, at  $t = 2.0$  s the particle has an acceleration of magnitude  $0.58 \text{ m/s}^2$  at an angle of  $149^\circ$  with respect to the positive  $x$ -axis. In Example 3.1 we found that at this time the velocity vector is at an angle of  $128^\circ$  with respect to the positive  $x$ -axis. The angle between  $\vec{a}$  and  $\vec{v}$  is therefore  $149^\circ - 128^\circ = 21^\circ$  (Fig. 3.13). Hence the components of acceleration parallel and perpendicular to  $\vec{v}$  are

$$a_{\parallel} = a \cos 21^\circ = (0.58 \text{ m/s}^2) \cos 21^\circ = 0.54 \text{ m/s}^2$$

$$a_{\perp} = a \sin 21^\circ = (0.58 \text{ m/s}^2) \sin 21^\circ = 0.21 \text{ m/s}^2$$

**EVALUATE** The parallel component  $a_{\parallel}$  is positive (in the same direction as  $\vec{v}$ ), which means that the speed is increasing at this instant. The value  $a_{\parallel} = +0.54 \text{ m/s}^2$  tells us that the speed is increasing at this instant at a rate of  $0.54 \text{ m/s}$  per second. The perpendicular component  $a_{\perp}$  is not

Figure 3.13 The parallel and perpendicular components of the acceleration of the rover at  $t = 2.0$  s.

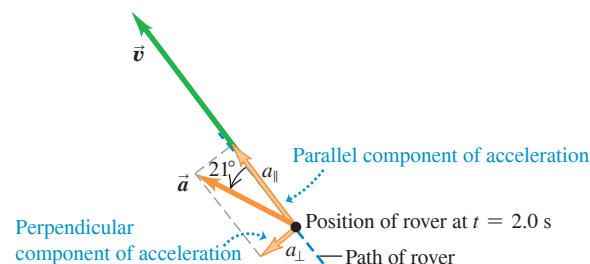

zero, which means that at this instant the rover is turning—that is, it is changing direction and following a curved path.

**KEYCONCEPT** If an object's *speed* is changing, there is a component of its acceleration vector *parallel* to its velocity vector. If an object's *direction of motion* is changing—that is, it is turning—there is a component of its acceleration vector *perpendicular* to its velocity vector and toward the inside of the turn.

**CONCEPTUAL EXAMPLE 3.4** Acceleration of a skier


A skier moves along a ski-jump ramp (Fig. 3.14a). The ramp is straight from point  $A$  to point  $C$  and curved from point  $C$  onward. The skier speeds up as she moves downhill from point  $A$  to point  $E$ , where her speed is maximum. She slows down after passing point  $E$ . Draw the direction of the acceleration vector at each of the points  $B$ ,  $D$ ,  $E$ , and  $F$ .

**SOLUTION** Figure 3.14b shows our solution. At point  $B$  the skier is moving in a straight line with increasing speed, so her acceleration points downhill, in the same direction as her velocity. At points  $D$ ,  $E$ , and  $F$  the skier is moving along a curved path, so her acceleration has a component perpendicular to the path (toward the concave side of the path) at each of these points. At point  $D$  there is also an acceleration component in the direction of her motion because she is speeding up. So the acceleration vector points *ahead* of the normal to her path at point  $D$ . At point  $E$ , the skier's speed is instantaneously not changing; her speed is maximum at this point, so its derivative is zero. There is therefore no parallel component of  $\vec{a}$ , and the acceleration is perpendicular to her motion. At point  $F$  there is an acceleration component *opposite* to the direction of her motion because she's slowing down. The acceleration vector therefore points *behind* the normal to her path.

In the next section we'll consider the skier's acceleration after she flies off the ramp.

**KEYCONCEPT** If a moving object is turning (changing direction), its acceleration vector points ahead of the normal to its path if it is speeding up, behind the normal if it is slowing down, and along the normal if its speed is instantaneously not changing.

Figure 3.14 (a) The skier's path. (b) Our solution.

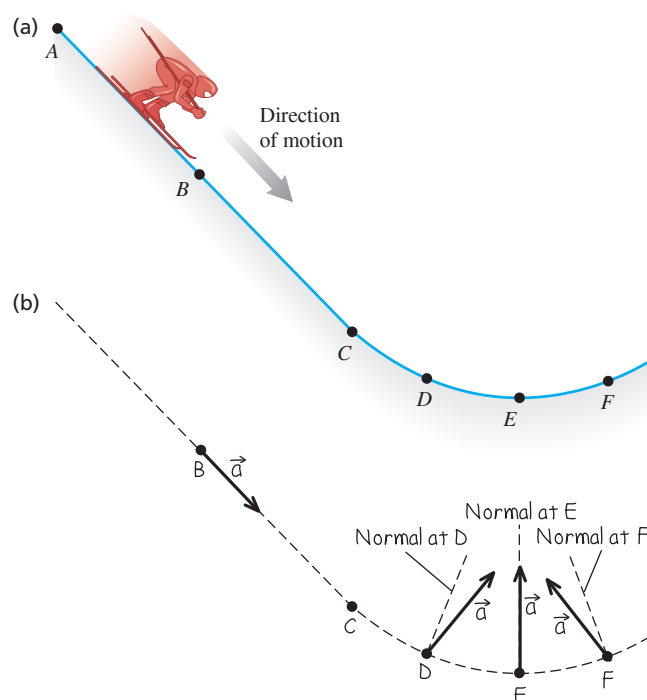

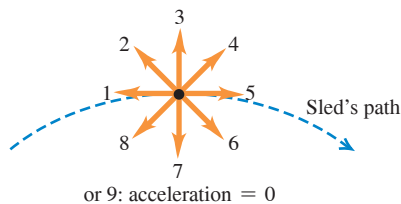


Figure 3.15 The trajectory of an idealized projectile.

- A projectile moves in a vertical plane that contains the initial velocity vector  $\vec{v}_0$ .
- Its trajectory depends only on  $\vec{v}_0$  and on the downward acceleration due to gravity.


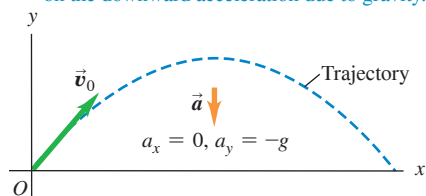


Figure 3.16 The red ball is dropped from rest, and the yellow ball is simultaneously projected horizontally.

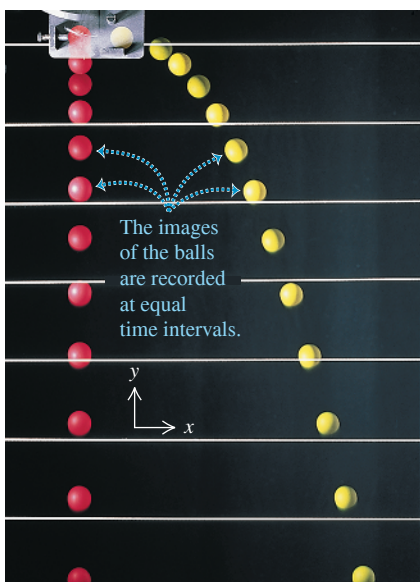

- At any time the two balls have different  $x$ -coordinates and  $x$ -velocities but the same  $y$ -coordinate,  $y$ -velocity, and  $y$ -acceleration.
- The horizontal motion of the yellow ball has no effect on its vertical motion.

**TEST YOUR UNDERSTANDING OF SECTION 3.2** A sled travels over the crest of a snow-covered hill. The sled slows down as it climbs up one side of the hill and gains speed as it descends on the other side. Which of the vectors (1 through 9) in the figure correctly shows the direction of the sled’s acceleration at the crest? (Choice 9 is that the acceleration is zero.)

**ANSWER** At the high point of the sled’s path, the speed is minimum. At that point the speed is neither increasing nor decreasing, and the parallel component of the acceleration (that is, the horizontal component) is zero. The acceleration has only a perpendicular component toward the inside of the sled’s curved path. In other words, the acceleration is downward.

### 3.3 PROJECTILE MOTION

A **projectile** is any object that is given an initial velocity and then follows a path determined entirely by the effects of gravitational acceleration and air resistance. A batted baseball, a thrown basketball, and a bullet shot from a rifle are all projectiles. The path followed by a projectile is called its **trajectory**.

To analyze the motion of a projectile, we’ll use an idealized model. We’ll represent the projectile as a particle with an acceleration (due to gravity) that is constant in both magnitude and direction. We’ll ignore the effects of air resistance and the curvature and rotation of the earth. This model has limitations, however: We have to consider the earth’s curvature when we study the flight of long-range missiles, and air resistance is of crucial importance to a sky diver. Nevertheless, we can learn a lot from analysis of this simple model. For the remainder of this chapter the phrase “projectile motion” will imply that we’re ignoring air resistance. In Chapter 5 we’ll see what happens when air resistance cannot be ignored.

Projectile motion is always confined to a vertical plane determined by the direction of the initial velocity (**Fig. 3.15**). This is because the acceleration due to gravity is purely vertical; gravity can’t accelerate the projectile sideways. Thus projectile motion is *two-dimensional*. We’ll call the plane of motion the  $xy$ -coordinate plane, with the  $x$ -axis horizontal and the  $y$ -axis vertically upward.

The key to analyzing projectile motion is that we can treat the  $x$ - and  $y$ -coordinates separately. **Figure 3.16** illustrates this for two projectiles: a red ball dropped from rest and a yellow ball projected horizontally from the same height. The figure shows that the horizontal motion of the yellow projectile has *no* effect on its vertical motion. For both projectiles, the  $x$ -component of acceleration is zero and the  $y$ -component is constant and equal to  $-g$ . (By definition,  $g$  is always positive; with our choice of coordinate directions,  $a_y$  is negative.) So we can analyze projectile motion as a combination of horizontal motion with constant velocity and vertical motion with constant acceleration.

We can then express all the vector relationships for the projectile’s position, velocity, and acceleration by separate equations for the horizontal and vertical components. The components of  $\vec{a}$  are

$$a_x = 0 \quad a_y = -g \quad (\text{projectile motion, no air resistance}) \quad (3.13)$$

Since both the  $x$ -acceleration and  $y$ -acceleration are constant, we can use Eqs. (2.8), (2.12), (2.13), and (2.14) directly. Suppose that at time  $t = 0$  our particle is at the point  $(x_0, y_0)$  and its initial velocity at this time has components  $v_{0x}$  and  $v_{0y}$ . The components of acceleration are  $a_x = 0$ ,  $a_y = -g$ . Considering the  $x$ -motion first, we substitute 0 for  $a_x$  in Eqs. (2.8) and (2.12). We find

$$v_x = v_{0x} \quad (3.14)$$

$$x = x_0 + v_{0x}t \quad (3.15)$$


For the  $y$ -motion we substitute  $y$  for  $x$ ,  $v_y$  for  $v_x$ ,  $v_{0y}$  for  $v_{0x}$ , and  $a_y = -g$  for  $a_x$ :

$$v_y = v_{0y} - gt \quad (3.16)$$

$$y = y_0 + v_{0y}t - \frac{1}{2}gt^2 \quad (3.17)$$



Figure 3.17 If air resistance is negligible, the trajectory of a projectile is a combination of horizontal motion with constant velocity and vertical motion with constant acceleration.

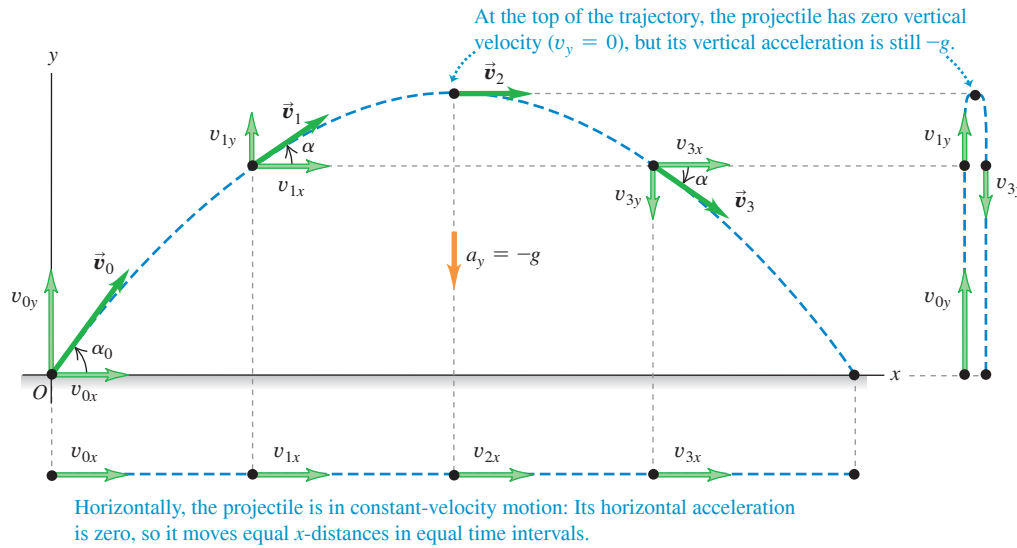

Vertically, the projectile is in constant-acceleration motion in response to the earth's gravitational pull. Thus its vertical velocity changes by equal amounts during equal time intervals.

It's usually simplest to take the initial position (at  $t = 0$ ) as the origin; then  $x_0 = y_0 = 0$ . This might be the position of a ball at the instant it leaves the hand of the person who throws it or the position of a bullet at the instant it leaves the gun barrel.


Figure 3.17 shows the trajectory of a projectile that starts at (or passes through) the origin at time  $t = 0$ , along with its position, velocity, and velocity components at equal time intervals. The  $x$ -velocity  $v_x$  is constant; the  $y$ -velocity  $v_y$  changes by equal amounts in equal times, just as if the projectile were launched vertically with the same initial  $y$ -velocity.

We can also represent the initial velocity  $\vec{v}_0$  by its magnitude  $v_0$  (the initial speed) and its angle  $\alpha_0$  with the positive  $x$ -axis (Fig. 3.18). In terms of these quantities, the components  $v_{0x}$  and  $v_{0y}$  of the initial velocity are

$$v_{0x} = v_0 \cos \alpha_0 \quad v_{0y} = v_0 \sin \alpha_0 \quad (3.18)$$

If we substitute Eqs. (3.18) into Eqs. (3.14) through (3.17) and set  $x_0 = y_0 = 0$ , we get the following equations. They describe the position and velocity of the projectile in Fig. 3.17 at any time  $t$ :

Figure 3.18 The initial velocity components  $v_{0x}$  and  $v_{0y}$  of a projectile (such as a kicked football) are related to the initial speed  $v_0$  and initial angle  $\alpha_0$ .

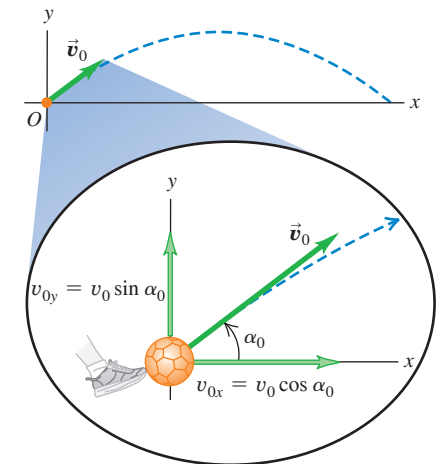

$$x = (v_0 \cos \alpha_0)t \quad (3.19)$$

$$y = (v_0 \sin \alpha_0)t - \frac{1}{2}gt^2 \quad (3.20)$$

$$v_x = v_0 \cos \alpha_0 \quad (3.21)$$

$$v_y = v_0 \sin \alpha_0 - gt \quad (3.22)$$

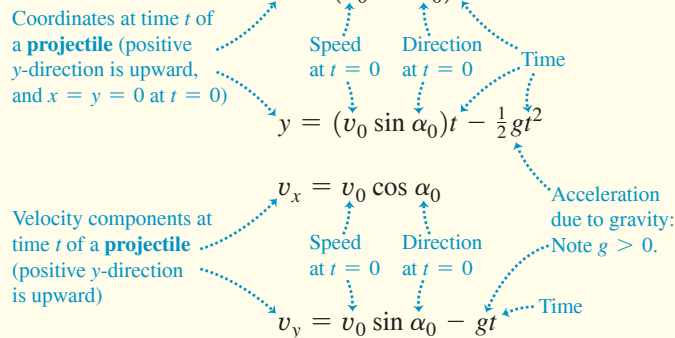


Figure 3.19 The nearly parabolic trajectories of a bouncing ball.


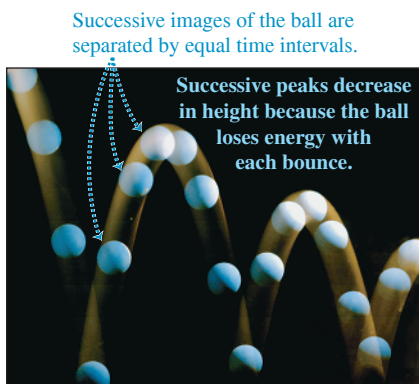


Figure 3.20 Air resistance has a large cumulative effect on the motion of a baseball. In this simulation we allow the baseball to fall below the height from which it was thrown (for example, the baseball could have been thrown from a cliff).

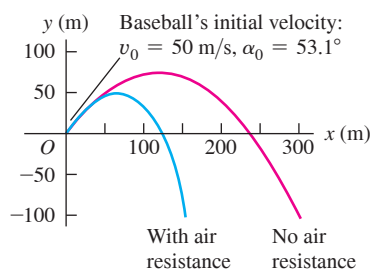

We can get a lot of information from Eqs. (3.19) through (3.22). For example, the distance  $r$  from the origin to the projectile at any time  $t$  is

$$r = \sqrt{x^2 + y^2} \quad (3.23)$$

The projectile's speed (the magnitude of its velocity) at any time is

$$v = \sqrt{v_x^2 + v_y^2} \quad (3.24)$$

The *direction* of the velocity, in terms of the angle  $\alpha$  it makes with the positive  $x$ -direction (see Fig. 3.17), is

$$\tan \alpha = \frac{v_y}{v_x} \quad (3.25)$$

The velocity vector  $\vec{v}$  is tangent to the trajectory at each point.

We can derive an equation for the trajectory's shape in terms of  $x$  and  $y$  by eliminating  $t$ . From Eqs. (3.19) and (3.20), we find  $t = x/(v_0 \cos \alpha_0)$  and

$$y = (\tan \alpha_0)x - \frac{g}{2v_0^2 \cos^2 \alpha_0} x^2 \quad (3.26)$$

Don't worry about the details of this equation; the important point is its general form. Since  $v_0$ ,  $\tan \alpha_0$ ,  $\cos \alpha_0$ , and  $g$  are constants, Eq. (3.26) has the form

$$y = bx - cx^2$$

where  $b$  and  $c$  are constants. This is the equation of a *parabola*. In our simple model of projectile motion, the trajectory is always a parabola (Fig. 3.19).

When air resistance *isn't* negligible and has to be included, calculating the trajectory becomes a lot more complicated; the effects of air resistance depend on velocity, so the acceleration is no longer constant. Figure 3.20 shows a computer simulation of the trajectory of a baseball both without air resistance and with air resistance proportional to the square of the baseball's speed. We see that air resistance has a very large effect; the projectile does not travel as far or as high, and the trajectory is no longer a parabola.

### CONCEPTUAL EXAMPLE 3.5 Acceleration of a skier, continued


Let's consider again the skier in Conceptual Example 3.4. What is her acceleration at each of the points  $G$ ,  $H$ , and  $I$  in Fig. 3.21a *after* she flies off the ramp? Neglect air resistance.

**SOLUTION** Figure 3.21b shows our answer. The skier's acceleration changed from point to point while she was on the ramp. But as soon as she leaves the ramp, she becomes a projectile. So at points  $G$ ,  $H$ , and  $I$ ,

and indeed at *all* points after she leaves the ramp, the skier's acceleration points vertically downward and has magnitude  $g$ .

**KEYCONCEPT** No matter how complicated the acceleration of a particle before it becomes a projectile, its acceleration as a projectile is given by  $a_x = 0$ ,  $a_y = -g$ .

Figure 3.21 (a) The skier's path during the jump. (b) Our solution.

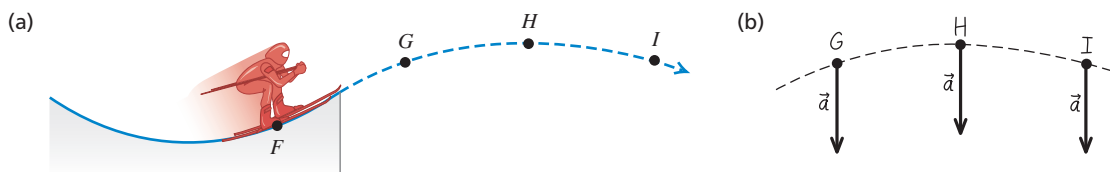

### PROBLEM-SOLVING STRATEGY 3.1 Projectile Motion

**NOTE:** The strategies we used in Sections 2.4 and 2.5 for straight-line, constant-acceleration problems are also useful here.

**IDENTIFY** *the relevant concepts:* The key concept is that throughout projectile motion, the acceleration is downward and has a constant magnitude  $g$ . Projectile-motion equations don't apply to *throwing* a ball, because during the throw the ball is acted on by both the thrower's hand and gravity. These equations apply only *after* the ball leaves the thrower's hand.

**SET UP** *the problem* using the following steps:

1. Define your coordinate system and make a sketch showing your axes. It's almost always best to make the  $x$ -axis horizontal and the  $y$ -axis vertical, and to choose the origin to be where the object first becomes a projectile (for example, where a ball leaves the thrower's hand). Then the components of acceleration are  $a_x = 0$  and  $a_y = -g$ , as in Eq. (3.13); the initial position is  $x_0 = y_0 = 0$ ; and you can use Eqs. (3.19) through (3.22). (If you choose a different origin or axes, you'll have to modify these equations.)
2. List the unknown and known quantities, and decide which unknowns are your target variables. For example, you might be given the initial velocity (either the components or the magnitude and direction) and asked to find the coordinates and velocity components

at some later time. Make sure that you have as many equations as there are target variables to be found. In addition to Eqs. (3.19) through (3.22), Eqs. (3.23) through (3.26) may be useful.

3. State the problem in words and then translate those words into symbols. For example, *when* does the particle arrive at a certain point? (That is, at what value of  $t$ ?) *Where* is the particle when its velocity has a certain value? (That is, what are the values of  $x$  and  $y$  when  $v_x$  or  $v_y$  has the specified value?) Since  $v_y = 0$  at the highest point in a trajectory, the question "When does the projectile reach its highest point?" translates into "What is the value of  $t$  when  $v_y = 0$ ?" Similarly, "When does the projectile return to its initial elevation?" translates into "What is the value of  $t$  when  $y = y_0$ ?"

**EXECUTE** *the solution:* Find the target variables using the equations you chose. Resist the temptation to break the trajectory into segments and analyze each segment separately. You don't have to start all over when the projectile reaches its highest point! It's almost always easier to use the same axes and time scale throughout the problem. If you need numerical values, use  $g = 9.80 \text{ m/s}^2$ . Remember that  $g$  is positive!

**EVALUATE** *your answer:* Do your results make sense? Do the numerical values seem reasonable?

### EXAMPLE 3.6 An object projected horizontally

WITH ✓ VARIATION PROBLEMS

A motorcycle stunt rider rides off the edge of a cliff. Just at the edge his velocity is horizontal, with magnitude  $9.0 \text{ m/s}$ . Find the motorcycle's position, distance from the edge of the cliff, and velocity  $0.50 \text{ s}$  after it leaves the edge of the cliff. Ignore air resistance.

**IDENTIFY and SET UP** Figure 3.22 shows our sketch of the trajectory of motorcycle and rider. He is in projectile motion as soon as he leaves the edge of the cliff, which we take to be the origin (so  $x_0 = y_0 = 0$ ). His initial velocity  $\vec{v}_0$  at the edge of the cliff is horizontal (that is,  $\alpha_0 = 0$ ), so its components are  $v_{0x} = v_0 \cos \alpha_0 = 9.0 \text{ m/s}$  and  $v_{0y} = v_0 \sin \alpha_0 = 0$ . To find the motorcycle's position at  $t = 0.50 \text{ s}$ , we use Eqs. (3.19) and (3.20); we then find the distance from the origin using Eq. (3.23). Finally, we use Eqs. (3.21) and (3.22) to find the velocity components at  $t = 0.50 \text{ s}$ .

**EXECUTE** From Eqs. (3.19) and (3.20), the motorcycle's  $x$ - and  $y$ -coordinates at  $t = 0.50 \text{ s}$  are

$$x = v_{0x}t = (9.0 \text{ m/s})(0.50 \text{ s}) = 4.5 \text{ m}$$

$$y = -\frac{1}{2}gt^2 = -\frac{1}{2}(9.80 \text{ m/s}^2)(0.50 \text{ s})^2 = -1.2 \text{ m}$$

The negative value of  $y$  shows that the motorcycle is below its starting point.

From Eq. (3.23), the motorcycle's distance from the origin at  $t = 0.50 \text{ s}$  is

$$r = \sqrt{x^2 + y^2} = \sqrt{(4.5 \text{ m})^2 + (-1.2 \text{ m})^2} = 4.7 \text{ m}$$

From Eqs. (3.21) and (3.22), the velocity components at  $t = 0.50 \text{ s}$  are


$$v_x = v_{0x} = 9.0 \text{ m/s}$$

$$v_y = -gt = (-9.80 \text{ m/s}^2)(0.50 \text{ s}) = -4.9 \text{ m/s}$$

The motorcycle has the same horizontal velocity  $v_x$  as when it left the cliff at  $t = 0$ , but in addition there is a downward (negative) vertical velocity  $v_y$ . The velocity vector at  $t = 0.50 \text{ s}$  is

$$\vec{v} = v_x \hat{i} + v_y \hat{j} = (9.0 \text{ m/s})\hat{i} + (-4.9 \text{ m/s})\hat{j}$$

Figure 3.22 Our sketch for this problem.

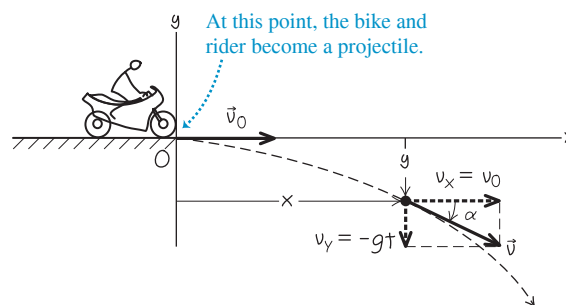

From Eqs. (3.24) and (3.25), at  $t = 0.50 \text{ s}$  the velocity has magnitude  $v$  and angle  $\alpha$  given by

$$v = \sqrt{v_x^2 + v_y^2} = \sqrt{(9.0 \text{ m/s})^2 + (-4.9 \text{ m/s})^2} = 10.2 \text{ m/s}$$

$$\alpha = \arctan \frac{v_y}{v_x} = \arctan \left( \frac{-4.9 \text{ m/s}}{9.0 \text{ m/s}} \right) = -29^\circ$$

The motorcycle is moving at  $10.2 \text{ m/s}$  in a direction  $29^\circ$  below the horizontal.

**EVALUATE** Just as in Fig. 3.17, the motorcycle's horizontal motion is unchanged by gravity; the motorcycle continues to move horizontally at  $9.0 \text{ m/s}$ , covering  $4.5 \text{ m}$  in  $0.50 \text{ s}$ . The motorcycle initially has zero vertical velocity, so it falls vertically just like an object released from rest and descends a distance  $\frac{1}{2}gt^2 = 1.2 \text{ m}$  in  $0.50 \text{ s}$ .

**KEYCONCEPT** The motion of a projectile is a combination of motion with constant velocity in the horizontal  $x$ -direction and motion with constant downward acceleration in the vertical  $y$ -direction.

## EXAMPLE 3.7 Height and range of a projectile I: A batted baseball

WITH **V**ARIATION PROBLEMS

A batter hits a baseball so that it leaves the bat at speed  $v_0 = 37.0$  m/s at an angle  $\alpha_0 = 53.1^\circ$ . (a) Find the position of the ball and its velocity (magnitude and direction) at  $t = 2.00$  s. (b) Find the time when the ball reaches the highest point of its flight, and its height  $h$  at this time. (c) Find the *horizontal range*  $R$ —that is, the horizontal distance from the starting point to where the ball hits the ground—and the ball's velocity just before it hits.

**IDENTIFY and SET UP** As Fig. 3.20 shows, air resistance strongly affects the motion of a baseball. For simplicity, however, we'll ignore air resistance here and use the projectile-motion equations to describe the motion. The ball leaves the bat at  $t = 0$  a meter or so above ground level, but we'll ignore this distance and assume that it starts at ground level ( $y_0 = 0$ ). **Figure 3.23** shows our sketch of the ball's trajectory. We'll use the same coordinate system as in Figs. 3.17 and 3.18, so we can use Eqs. (3.19) through (3.22). Our target variables are (a) the position and velocity of the ball 2.00 s after it leaves the bat, (b) the time  $t$  when the ball is at its maximum height (that is, when  $v_y = 0$ ) and the  $y$ -coordinate at this time, and (c) the  $x$ -coordinate when the ball returns to ground level ( $y = 0$ ) and the ball's vertical component of velocity then.

**EXECUTE** (a) We want to find  $x$ ,  $y$ ,  $v_x$ , and  $v_y$  at  $t = 2.00$  s. The initial velocity of the ball has components

$$v_{0x} = v_0 \cos \alpha_0 = (37.0 \text{ m/s}) \cos 53.1^\circ = 22.2 \text{ m/s}$$

$$v_{0y} = v_0 \sin \alpha_0 = (37.0 \text{ m/s}) \sin 53.1^\circ = 29.6 \text{ m/s}$$

From Eqs. (3.19) through (3.22),

$$x = v_{0x}t = (22.2 \text{ m/s})(2.00 \text{ s}) = 44.4 \text{ m}$$

$$y = v_{0y}t - \frac{1}{2}gt^2 \\ = (29.6 \text{ m/s})(2.00 \text{ s}) - \frac{1}{2}(9.80 \text{ m/s}^2)(2.00 \text{ s})^2 = 39.6 \text{ m}$$

$$v_x = v_{0x} = 22.2 \text{ m/s}$$

$$v_y = v_{0y} - gt = 29.6 \text{ m/s} - (9.80 \text{ m/s}^2)(2.00 \text{ s}) = 10.0 \text{ m/s}$$

The  $y$ -component of velocity is positive at  $t = 2.00$  s, so the ball is still moving upward (Fig. 3.23). From Eqs. (3.24) and (3.25), the magnitude and direction of the velocity are

$$v = \sqrt{v_x^2 + v_y^2} = \sqrt{(22.2 \text{ m/s})^2 + (10.0 \text{ m/s})^2} = 24.4 \text{ m/s}$$

$$\alpha = \arctan\left(\frac{10.0 \text{ m/s}}{22.2 \text{ m/s}}\right) = \arctan 0.450 = 24.2^\circ$$

The ball is moving at 24.4 m/s in a direction  $24.2^\circ$  above the horizontal.

(b) At the highest point, the vertical velocity  $v_y$  is zero. Call the time when this happens  $t_1$ ; then

$$v_y = v_{0y} - gt_1 = 0$$

$$t_1 = \frac{v_{0y}}{g} = \frac{29.6 \text{ m/s}}{9.80 \text{ m/s}^2} = 3.02 \text{ s}$$


The height  $h$  at the highest point is the value of  $y$  at time  $t_1$ :

$$h = v_{0y}t_1 - \frac{1}{2}gt_1^2 \\ = (29.6 \text{ m/s})(3.02 \text{ s}) - \frac{1}{2}(9.80 \text{ m/s}^2)(3.02 \text{ s})^2 = 44.7 \text{ m}$$

(c) We'll find the horizontal range in two steps. First, we find the time  $t_2$  when  $y = 0$  (the ball is at ground level):

$$y = 0 = v_{0y}t_2 - \frac{1}{2}gt_2^2 = t_2(v_{0y} - \frac{1}{2}gt_2)$$

Figure 3.23 Our sketch for this problem.

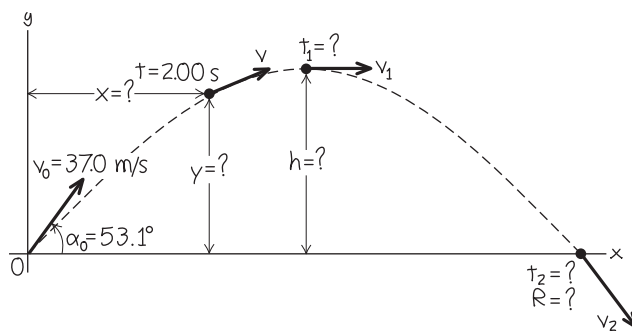

This is a quadratic equation for  $t_2$ . It has two roots:

$$t_2 = 0 \quad \text{and} \quad t_2 = \frac{2v_{0y}}{g} = \frac{2(29.6 \text{ m/s})}{9.80 \text{ m/s}^2} = 6.04 \text{ s}$$

The ball is at  $y = 0$  at both times. The ball *leaves* the ground at  $t_2 = 0$ , and it hits the ground at  $t_2 = 2v_{0y}/g = 6.04$  s.

The horizontal range  $R$  is the value of  $x$  when the ball returns to the ground at  $t_2 = 6.04$  s:

$$R = v_{0x}t_2 = (22.2 \text{ m/s})(6.04 \text{ s}) = 134 \text{ m}$$

The vertical component of velocity when the ball hits the ground is

$$v_y = v_{0y} - gt_2 = 29.6 \text{ m/s} - (9.80 \text{ m/s}^2)(6.04 \text{ s}) = -29.6 \text{ m/s}$$

That is,  $v_y$  has the same magnitude as the initial vertical velocity  $v_{0y}$  but the opposite direction (down). Since  $v_x$  is constant, the angle  $\alpha = -53.1^\circ$  (below the horizontal) at this point is the negative of the initial angle  $\alpha_0 = 53.1^\circ$ .

**EVALUATE** As a check on our results, we can also find the maximum height in part (b) by applying the constant-acceleration formula Eq. (2.13) to the  $y$ -motion:

$$v_y^2 = v_{0y}^2 + 2a_y(y - y_0) = v_{0y}^2 - 2g(y - y_0)$$

At the highest point,  $v_y = 0$  and  $y = h$ . Solve this equation for  $h$ ; you should get the answer that we obtained in part (b). (Do you?)

Note that the time to hit the ground,  $t_2 = 6.04$  s, is exactly twice the time to reach the highest point,  $t_1 = 3.02$  s. Hence the time of descent equals the time of ascent. This is *always* true if the starting point and end point are at the same elevation and if air resistance can be ignored.

Note also that  $h = 44.7$  m in part (b) is comparable to the 61.0 m height above second base of the roof at Marlins Park in Miami, and the horizontal range  $R = 134$  m in part (c) is greater than the 99.7 m distance from home plate to the right-field fence at Safeco Field in Seattle. In reality, due to air resistance (which we have ignored) a batted ball with the initial speed and angle we've used here won't go as high or as far as we've calculated (see Fig. 3.20).

**KEYCONCEPT** You can solve most projectile problems by using the equations for  $x$ ,  $y$ ,  $v_x$ , and  $v_y$  as functions of time. The highest point of a projectile's motion occurs at the time its vertical component of velocity is zero.

**EXAMPLE 3.8** Height and range of a projectile II: Maximum height, maximum rangeWITH  **VARIATION PROBLEMS**

Find the maximum height  $h$  and horizontal range  $R$  (see Fig. 3.23) of a projectile launched with speed  $v_0$  at an initial angle  $\alpha_0$  between 0 and  $90^\circ$ . For a given  $v_0$ , what value of  $\alpha_0$  gives maximum height? What value gives maximum horizontal range?

**IDENTIFY and SET UP** This is almost the same as parts (b) and (c) of Example 3.7, except that now we want general expressions for  $h$  and  $R$ . We also want the values of  $\alpha_0$  that give the maximum values of  $h$  and  $R$ . In part (b) of Example 3.7 we found that the projectile reaches the high point of its trajectory (so that  $v_y = 0$ ) at time  $t_1 = v_{0y}/g$ , and in part (c) we found that the projectile returns to its starting height (so that  $y = y_0$ ) at time  $t_2 = 2v_{0y}/g = 2t_1$ . We'll use Eq. (3.20) to find the  $y$ -coordinate  $h$  at  $t_1$  and Eq. (3.19) to find the  $x$ -coordinate  $R$  at time  $t_2$ . We'll express our answers in terms of the launch speed  $v_0$  and launch angle  $\alpha_0$  by using Eqs. (3.18).

**EXECUTE** From Eqs. (3.18),  $v_{0x} = v_0 \cos \alpha_0$  and  $v_{0y} = v_0 \sin \alpha_0$ . Hence we can write the time  $t_1$  when  $v_y = 0$  as

$$t_1 = \frac{v_{0y}}{g} = \frac{v_0 \sin \alpha_0}{g}$$

Equation (3.20) gives the height  $y = h$  at this time:

$$h = (v_0 \sin \alpha_0) \left( \frac{v_0 \sin \alpha_0}{g} \right) - \frac{1}{2} g \left( \frac{v_0 \sin \alpha_0}{g} \right)^2 = \frac{v_0^2 \sin^2 \alpha_0}{2g}$$

For a given launch speed  $v_0$ , the maximum value of  $h$  occurs for  $\sin \alpha_0 = 1$  and  $\alpha_0 = 90^\circ$ —that is, when the projectile is launched straight up. (If it is launched horizontally, as in Example 3.6,  $\alpha_0 = 0$  and the maximum height is zero!)

The time  $t_2$  when the projectile hits the ground is

$$t_2 = \frac{2v_{0y}}{g} = \frac{2v_0 \sin \alpha_0}{g}$$


The horizontal range  $R$  is the value of  $x$  at this time. From Eq. (3.19), this is

$$R = (v_0 \cos \alpha_0) t_2 = (v_0 \cos \alpha_0) \frac{2v_0 \sin \alpha_0}{g} = \frac{v_0^2 \sin 2\alpha_0}{g}$$

(We used the trigonometric identity  $2 \sin \alpha_0 \cos \alpha_0 = \sin 2\alpha_0$ , found in Appendix D.) The maximum value of  $\sin 2\alpha_0$  is 1; this occurs when


Figure 3.24 A launch angle of  $45^\circ$  gives the maximum horizontal range. The range is shorter with launch angles of  $30^\circ$  and  $60^\circ$ .

A  $45^\circ$  launch angle gives the greatest range; other angles fall shorter.

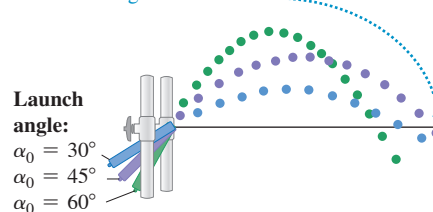

$2\alpha_0 = 90^\circ$ , or  $\alpha_0 = 45^\circ$ . This angle gives the maximum range for a given initial speed if air resistance can be ignored.

**EVALUATE** Figure 3.24 is based on a composite photograph of three trajectories of a ball projected from a small spring gun at angles of  $30^\circ$ ,  $45^\circ$ , and  $60^\circ$ . The initial speed  $v_0$  is approximately the same in all three cases. The horizontal range is greatest for the  $45^\circ$  angle. The ranges are nearly the same for the  $30^\circ$  and  $60^\circ$  angles: Can you prove that for a given value of  $v_0$  the range is the same for both an initial angle  $\alpha_0$  and an initial angle  $90^\circ - \alpha_0$ ? (This is not the case in Fig. 3.24 due to air resistance.)

**CAUTION** **Height and range of a projectile** We don't recommend memorizing the above expressions for  $h$  and  $R$ . They are applicable only in the special circumstances we've described. In particular, you can use the expression for the range  $R$  *only* when launch and landing heights are equal. There are many end-of-chapter problems to which these equations do *not* apply. 


**KEYCONCEPT** When you solve physics problems in general, and projectile problems in particular, it's best to use symbols rather than numbers as far into the solution as possible. This allows you to better explore and understand your result.

**EXAMPLE 3.9** Different initial and final heightsWITH  **VARIATION PROBLEMS**

You throw a ball from your window 8.0 m above the ground. When the ball leaves your hand, it is moving at 10.0 m/s at an angle of  $20.0^\circ$  below the horizontal. How far horizontally from your window will the ball hit the ground? Ignore air resistance.

**IDENTIFY and SET UP** As in Examples 3.7 and 3.8, we want to find the horizontal coordinate of a projectile when it is at a given  $y$ -value. The difference here is that this value of  $y$  is *not* the same as the initial value. We again choose the  $x$ -axis to be horizontal and the  $y$ -axis to be upward, and place the origin of coordinates at the point where the ball leaves your hand (Fig. 3.25). We have  $v_0 = 10.0$  m/s and  $\alpha_0 = -20.0^\circ$  (the angle is negative because the initial velocity is below the horizontal). Our target variable is the value of  $x$  when the ball reaches the ground at  $y = -8.0$  m. We'll use Eq. (3.20) to find the time  $t$  when this happens and then use Eq. (3.19) to find the value of  $x$  at this time.

Figure 3.25 Our sketch for this problem.

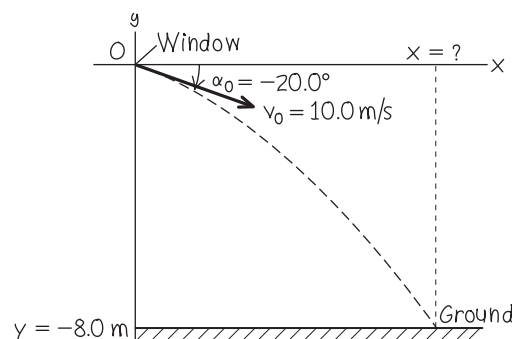

Continued

**EXECUTE** To determine  $t$ , we rewrite Eq. (3.20) in the standard form for a quadratic equation for  $t$ :

$$\frac{1}{2}gt^2 - (v_0 \sin \alpha_0)t + y = 0$$

The roots of this equation are

$$\begin{aligned} t &= \frac{v_0 \sin \alpha_0 \pm \sqrt{(-v_0 \sin \alpha_0)^2 - 4\left(\frac{1}{2}g\right)y}}{2\left(\frac{1}{2}g\right)} \\ &= \frac{v_0 \sin \alpha_0 \pm \sqrt{v_0^2 \sin^2 \alpha_0 - 2gy}}{g} \\ &= \frac{\left[ (10.0 \text{ m/s}) \sin(-20.0^\circ) \right. \\ &\quad \left. \pm \sqrt{(10.0 \text{ m/s})^2 \sin^2(-20.0^\circ) - 2(9.80 \text{ m/s}^2)(-8.0 \text{ m})} \right]}{9.80 \text{ m/s}^2} \\ &= -1.7 \text{ s} \quad \text{or} \quad 0.98 \text{ s} \end{aligned}$$

We discard the negative root, since it refers to a time before the ball left your hand. The positive root tells us that the ball reaches the ground at  $t = 0.98 \text{ s}$ . From Eq. (3.19), the ball's  $x$ -coordinate at that time is

$$x = (v_0 \cos \alpha_0)t = (10.0 \text{ m/s})[\cos(-20^\circ)](0.98 \text{ s}) = 9.2 \text{ m}$$

The ball hits the ground a horizontal distance of 9.2 m from your window.

**EVALUATE** The root  $t = -1.7 \text{ s}$  is an example of a “fictional” solution to a quadratic equation. We discussed these in Example 2.8 in Section 2.5; review that discussion.

**KEYCONCEPT** A projectile's vertical coordinate  $y$  as a function of time is given by a quadratic equation, which in general has more than one solution. Take care to select the solution that's appropriate for the problem you're solving.

### EXAMPLE 3.10 The zookeeper and the monkey

A monkey escapes from the zoo and climbs a tree. After failing to entice the monkey down, the zookeeper fires a tranquilizer dart directly at the monkey (Fig. 3.26). The monkey lets go at the instant the dart leaves the gun. Show that the dart will *always* hit the monkey, provided that the dart reaches the monkey before he hits the ground and runs away.

**IDENTIFY and SET UP** We have *two* objects in projectile motion: the dart and the monkey. They have different initial positions and initial velocities, but they go into projectile motion at the same time  $t = 0$ . We'll first use Eq. (3.19) to find an expression for the time  $t$  when the  $x$ -coordinates  $x_{\text{monkey}}$  and  $x_{\text{dart}}$  are equal. Then we'll use that expression in Eq. (3.20) to see whether  $y_{\text{monkey}}$  and  $y_{\text{dart}}$  are also equal at this time; if they are, the dart hits the monkey. We make the usual choice for the  $x$ - and  $y$ -directions, and place the origin of coordinates at the muzzle of the tranquilizer gun (Fig. 3.26).

**EXECUTE** The monkey drops straight down, so  $x_{\text{monkey}} = d$  at all times. From Eq. (3.19),  $x_{\text{dart}} = (v_0 \cos \alpha_0)t$ . We solve for the time  $t$  when these  $x$ -coordinates are equal:

$$d = (v_0 \cos \alpha_0)t \quad \text{so} \quad t = \frac{d}{v_0 \cos \alpha_0}$$


We must now show that  $y_{\text{monkey}} = y_{\text{dart}}$  at this time. The monkey is in one-dimensional free fall; its position at any time is given by Eq. (2.12), with appropriate symbol changes. Figure 3.26 shows that the monkey's initial height above the dart-gun's muzzle is  $y_{\text{monkey-0}} = d \tan \alpha_0$ , so

$$y_{\text{monkey}} = d \tan \alpha_0 - \frac{1}{2}gt^2$$

From Eq. (3.20),

$$y_{\text{dart}} = (v_0 \sin \alpha_0)t - \frac{1}{2}gt^2$$

Figure 3.26 The tranquilizer dart hits the falling monkey.

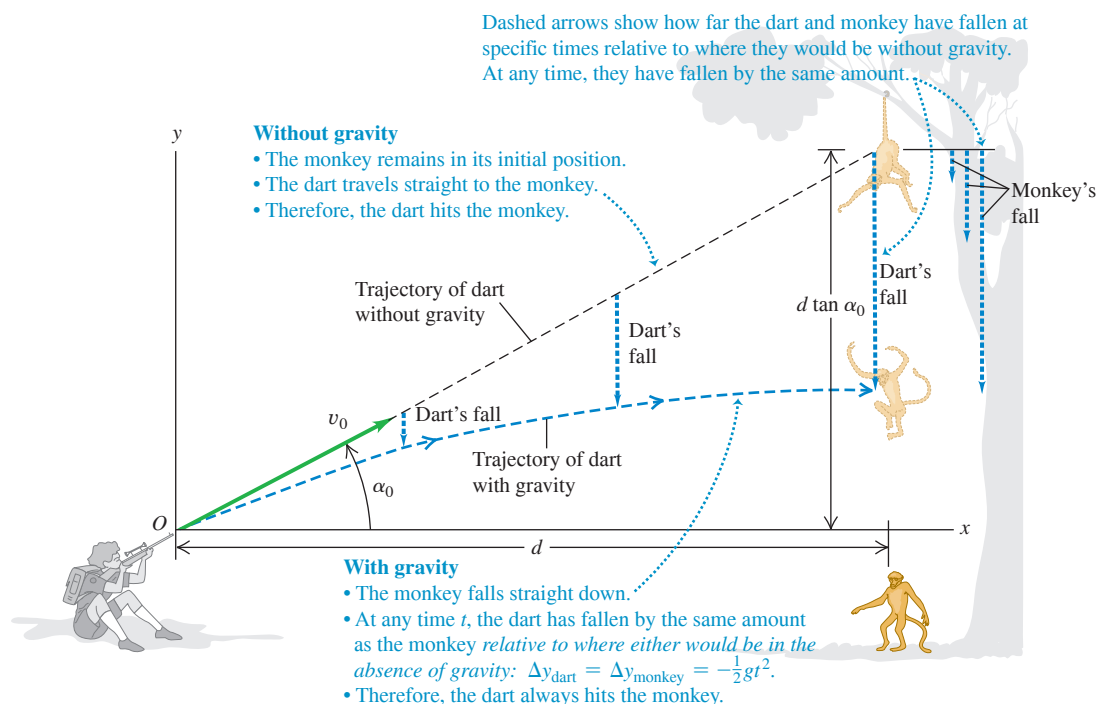

Comparing these two equations, we see that we'll have  $y_{\text{monkey}} = y_{\text{dart}}$  (and a hit) if  $d \tan \alpha_0 = (v_0 \sin \alpha_0)t$  when the two  $x$ -coordinates are equal. To show that this happens, we replace  $t$  with  $d/(v_0 \cos \alpha_0)$ , the time when  $x_{\text{monkey}} = x_{\text{dart}}$ . Sure enough,

$$(v_0 \sin \alpha_0)t = (v_0 \sin \alpha_0) \frac{d}{v_0 \cos \alpha_0} = d \tan \alpha_0$$

**EVALUATE** We've proved that the  $y$ -coordinates of the dart and the monkey are equal at the same time that their  $x$ -coordinates are equal; a dart aimed at the monkey *always* hits it, no matter what  $v_0$


is (provided the monkey doesn't hit the ground first). This result is independent of the value of  $g$ , the acceleration due to gravity. With no gravity ( $g = 0$ ), the monkey would remain motionless, and the dart would travel in a straight line to hit him. With gravity, both fall the same distance  $\frac{1}{2}gt^2$  below their  $t = 0$  positions, and the dart still hits the monkey (Fig. 3.26).

**KEYCONCEPT** It can be useful to think of a projectile as following a straight-line path that's pulled downward by gravity a distance  $\frac{1}{2}gt^2$  in a time  $t$ .

**TEST YOUR UNDERSTANDING OF SECTION 3.3** In Example 3.10, suppose the tranquilizer dart has a relatively low muzzle velocity so that the dart reaches a maximum height at a point  $P$  before striking the monkey, as shown in the figure. When the dart is at point  $P$ , will the monkey be (i) at point  $A$  (higher than  $P$ ), (ii) at point  $B$  (at the same height as  $P$ ), or (iii) at point  $C$  (lower than  $P$ )? Ignore air resistance.

**ANSWER**

(i) If there were no gravity ( $g = 0$ ), the monkey would not fall and the dart would follow a straight-line path (shown as a dashed line). The effect of gravity is to make both the monkey and the dart fall the same distance  $\frac{1}{2}gt^2$  below their  $g = 0$  positions. Point  $A$  is the same distance below the monkey's initial position as point  $P$  is below the dashed straight line, so point  $A$  is where we would find the monkey at the time in question.

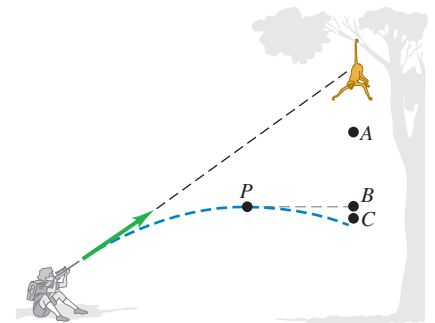

### 3.4 MOTION IN A CIRCLE


When a particle moves along a curved path, the direction of its velocity changes. As we saw in Section 3.2, this means that the particle *must* have a component of acceleration perpendicular to the path, even if its speed is constant (see Fig. 3.11b). In this section we'll calculate the acceleration for the important special case of motion in a circle.

#### Uniform Circular Motion

When a particle moves in a circle with *constant speed*, the motion is called **uniform circular motion**. A car rounding a curve with constant radius at constant speed, a satellite moving in a circular orbit, and an ice skater skating in a circle with constant speed are all examples of uniform circular motion (Fig. 3.27a; compare Fig. 3.12a). There is no component of acceleration parallel (tangent) to the path; otherwise, the speed would change. The acceleration vector is perpendicular (normal) to the path and hence directed inward (never outward!) toward the center of the circular path. This causes the direction of the velocity to change without changing the speed.


Figure 3.27 A car moving along a circular path. If the car is in uniform circular motion as in (a), the speed is constant and the acceleration is directed toward the center of the circular path (compare Fig. 3.12).

(a) **Uniform circular motion:** Constant speed along a circular path

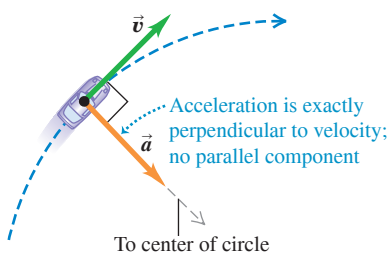

(b) **Car speeding up along a circular path**

Component of acceleration parallel to velocity: Changes car's speed

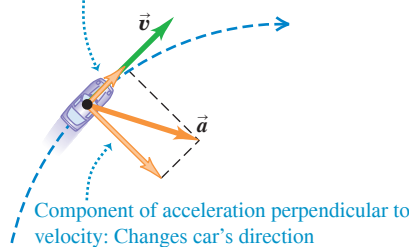

(c) **Car slowing down along a circular path**

Component of acceleration perpendicular to velocity: Changes car's direction



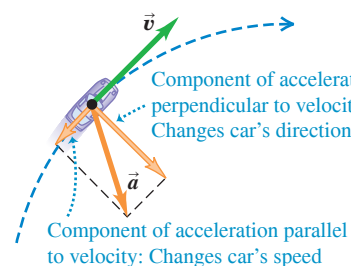


Figure 3.28 Finding the velocity change  $\Delta\vec{v}$ , average acceleration  $\vec{a}_{av}$ , and instantaneous acceleration  $\vec{a}_{rad}$  for a particle moving in a circle with constant speed.


(a) A particle moves a distance  $\Delta s$  at constant speed along a circular path.



(b) The corresponding change in velocity  $\Delta\vec{v}$ . The average acceleration is in the same direction as  $\Delta\vec{v}$ .

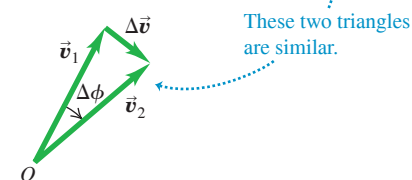

(c) The instantaneous acceleration

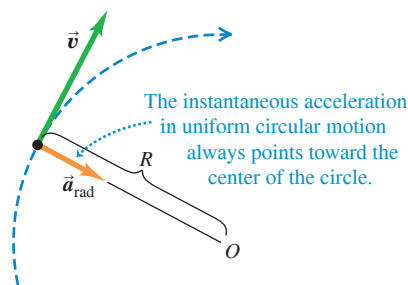

We can find a simple expression for the magnitude of the acceleration in uniform circular motion. We begin with **Fig. 3.28a**, which shows a particle moving with constant speed in a circular path of radius  $R$  with center at  $O$ . The particle moves a distance  $\Delta s$  from  $P_1$  to  $P_2$  in a time interval  $\Delta t$ . Figure 3.28b shows the vector change in velocity  $\Delta\vec{v}$  during this interval.

The angles labeled  $\Delta\phi$  in Figs. 3.28a and 3.28b are the same because  $\vec{v}_1$  is perpendicular to the line  $OP_1$  and  $\vec{v}_2$  is perpendicular to the line  $OP_2$ . Hence the triangles in Figs. 3.28a and 3.28b are *similar*. The ratios of corresponding sides of similar triangles are equal, so

$$\frac{|\Delta\vec{v}|}{v_1} = \frac{\Delta s}{R} \quad \text{or} \quad |\Delta\vec{v}| = \frac{v_1}{R} \Delta s$$

The magnitude  $a_{av}$  of the average acceleration during  $\Delta t$  is therefore

$$a_{av} = \frac{|\Delta\vec{v}|}{\Delta t} = \frac{v_1}{R} \frac{\Delta s}{\Delta t}$$

The magnitude  $a$  of the *instantaneous* acceleration  $\vec{a}$  at point  $P_1$  is the limit of this expression as we take point  $P_2$  closer and closer to point  $P_1$ :

$$a = \lim_{\Delta t \rightarrow 0} \frac{v_1}{R} \frac{\Delta s}{\Delta t} = \frac{v_1}{R} \lim_{\Delta t \rightarrow 0} \frac{\Delta s}{\Delta t}$$

If the time interval  $\Delta t$  is short,  $\Delta s$  is the distance the particle moves along its curved path. So the limit of  $\Delta s/\Delta t$  is the speed  $v_1$  at point  $P_1$ . Also,  $P_1$  can be any point on the path, so we can drop the subscript and let  $v$  represent the speed at any point. Then

$$\text{Magnitude of acceleration of an object in uniform circular motion} \rightarrow a_{rad} = \frac{v^2}{R} \leftarrow \begin{array}{l} \text{Speed of object} \\ \text{Radius of object's} \\ \text{circular path} \end{array} \quad (3.27)$$

The subscript “rad” is a reminder that the direction of the instantaneous acceleration at each point is always along a radius of the circle (toward the center of the circle; see Figs. 3.27a and 3.28c). So *in uniform circular motion, the magnitude  $a_{rad}$  of the instantaneous acceleration is equal to the square of the speed  $v$  divided by the radius  $R$  of the circle. Its direction is perpendicular to  $\vec{v}$  and inward along the radius (Fig. 3.29a)*. Because the acceleration in uniform circular motion is along the radius, we often call it **radial acceleration**.

Because the acceleration in uniform circular motion is always directed toward the center of the circle, it is sometimes called **centripetal acceleration**. The word “centripetal” is derived from two Greek words meaning “seeking the center.”

### APPLICATION The Moons of Jupiter

Each of the three moons of Jupiter shown in this image from the Hubble Space Telescope—Io, Europa, and Callisto—moves around Jupiter in a nearly circular orbit at a nearly constant speed. The larger the radius  $R$  of a moon’s orbit, the slower the speed  $v$  at which the moon moves and the smaller its centripetal acceleration  $a_{rad} = v^2/R$ .



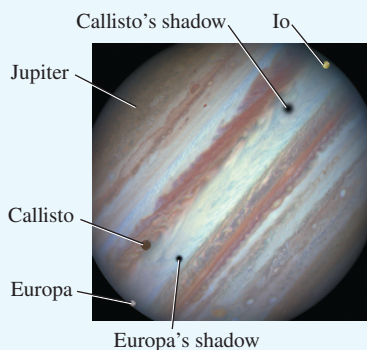


Figure 3.29 Acceleration and velocity (a) for a particle in uniform circular motion and (b) for a projectile with no air resistance.

(a) Uniform circular motion

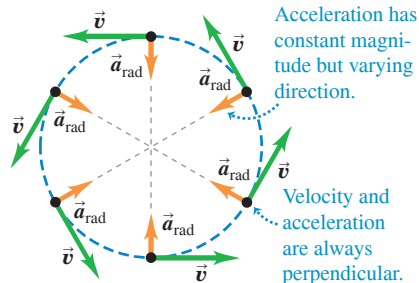

(b) Projectile motion

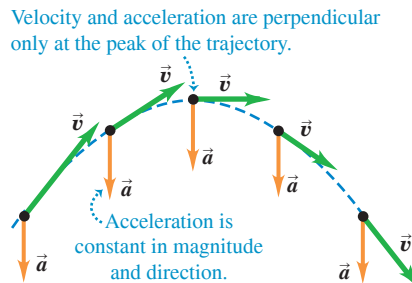



**CAUTION Uniform circular motion vs. projectile motion** Notice the differences between acceleration in uniform circular motion (Fig. 3.29a) and acceleration in projectile motion (Fig. 3.29b). It's true that in both kinds of motion the *magnitude* of acceleration is the same at all times. However, in uniform circular motion the *direction* of  $\vec{a}$  changes continuously—it always points toward the center of the circle and is always perpendicular to the velocity  $\vec{v}$ . In projectile motion, the direction of  $\vec{a}$  remains the same at all times and is perpendicular to  $\vec{v}$  only at the highest point of the trajectory. **|**

We can also express the magnitude of the acceleration in uniform circular motion in terms of the **period**  $T$  of the motion, the time for one revolution (one complete trip around the circle). In a time  $T$  the particle travels a distance equal to the circumference  $2\pi R$  of the circle, so its speed is

$$v = \frac{2\pi R}{T} \quad (3.28)$$

When we substitute this into Eq. (3.27), we obtain the alternative expression

$$a_{\text{rad}} = \frac{4\pi^2 R}{T^2} \quad (3.29)$$

Magnitude of acceleration of an object in uniform circular motion  $\leftarrow$  Radius of object's circular path  $\leftarrow$  Period of motion

### EXAMPLE 3.11 Centripetal acceleration on a curved road

### WITH $\checkmark$ VARIATION PROBLEMS

An Aston Martin V12 Vantage sports car has a “lateral acceleration” of  $0.97g = (0.97)(9.8 \text{ m/s}^2) = 9.5 \text{ m/s}^2$ . This is the maximum centripetal acceleration the car can sustain without skidding out of a curved path. If the car is traveling at a constant 40 m/s (144 km/h) on level ground, what is the radius  $R$  of the tightest unbanked curve it can negotiate?

**IDENTIFY, SET UP, and EXECUTE** The car is in uniform circular motion because it's moving at a constant speed along a curve that is a segment of a circle. Hence we can use Eq. (3.27) to solve for the target variable  $R$  in terms of the given centripetal acceleration  $a_{\text{rad}}$  and speed  $v$ :

$$R = \frac{v^2}{a_{\text{rad}}} = \frac{(40 \text{ m/s})^2}{9.5 \text{ m/s}^2} = 170 \text{ m}$$

This is the *minimum* turning radius because  $a_{\text{rad}}$  is the *maximum* centripetal acceleration.

**EVALUATE** The minimum turning radius  $R$  is proportional to the *square* of the speed, so even a small reduction in speed can make  $R$  substantially smaller. For example, reducing  $v$  by 20% (from 40 m/s to 32 m/s) would decrease  $R$  by 36% (from 170 m to 109 m).

Another way to make the minimum turning radius smaller is to *bank* the curve. We'll investigate this option in Chapter 5.

**KEYCONCEPT** For uniform circular motion at a given speed, decreasing the radius increases the centripetal acceleration.

### EXAMPLE 3.12 Centripetal acceleration on a fairground ride

### WITH $\checkmark$ VARIATION PROBLEMS

Passengers on a fairground ride move at constant speed in a horizontal circle of radius 5.0 m, making a complete circle in 4.0 s. What is their acceleration?

**IDENTIFY and SET UP** The speed is constant, so this is uniform circular motion. We are given the radius  $R = 5.0 \text{ m}$  and the period  $T = 4.0 \text{ s}$ , so we can use Eq. (3.29) to calculate the acceleration directly, or we can calculate the speed  $v$  by using Eq. (3.28) and then find the acceleration by using Eq. (3.27).

**EXECUTE** From Eq. (3.29),

$$a_{\text{rad}} = \frac{4\pi^2(5.0 \text{ m})}{(4.0 \text{ s})^2} = 12 \text{ m/s}^2 = 1.3g$$

**EVALUATE** We can check this answer by using the second, roundabout approach. From Eq. (3.28), the speed is

$$v = \frac{2\pi R}{T} = \frac{2\pi(5.0 \text{ m})}{4.0 \text{ s}} = 7.9 \text{ m/s}$$

The centripetal acceleration is then

$$a_{\text{rad}} = \frac{v^2}{R} = \frac{(7.9 \text{ m/s})^2}{5.0 \text{ m}} = 12 \text{ m/s}^2$$

As in Fig. 3.29a, the direction of  $\vec{a}$  is always toward the center of the circle. The magnitude of  $\vec{a}$  is relatively mild as fairground rides go; some roller coasters subject their passengers to accelerations as great as  $4g$ . To produce this acceleration with a fairground ride of radius 5.0 m would require a shorter period  $T$  and hence a faster speed  $v$  than in this example.

**KEYCONCEPT** For uniform circular motion with a given radius, decreasing the period increases the speed and the centripetal acceleration.

**APPLICATION Watch Out: Tight**

**Curves Ahead!** These roller coaster cars are in nonuniform circular motion: They slow down and speed up as they move around a vertical loop. The large accelerations involved in traveling at high speed around a tight loop mean extra stress on the passengers' circulatory systems, which is why people with cardiac conditions are cautioned against going on such rides.

**Nonuniform Circular Motion**

We have assumed throughout this section that the particle's speed is constant as it goes around the circle. If the speed varies, we call the motion **nonuniform circular motion**. In nonuniform circular motion, Eq. (3.27) still gives the *radial* component of acceleration  $a_{\text{rad}} = v^2/R$ , which is always *perpendicular* to the instantaneous velocity and directed toward the center of the circle. But since the speed  $v$  has different values at different points in the motion, the value of  $a_{\text{rad}}$  is not constant. The radial (centripetal) acceleration is greatest at the point in the circle where the speed is greatest.

In nonuniform circular motion there is also a component of acceleration that is *parallel* to the instantaneous velocity (see Figs. 3.27b and 3.27c). This is the component  $a_{\parallel}$  that we discussed in Section 3.2; here we call this component  $a_{\text{tan}}$  to emphasize that it is *tangent* to the circle. This component, called the **tangential acceleration**  $a_{\text{tan}}$ , is equal to the rate of change of *speed*. Thus

$$a_{\text{rad}} = \frac{v^2}{R} \quad \text{and} \quad a_{\text{tan}} = \frac{d|\vec{v}|}{dt} \quad (\text{nonuniform circular motion}) \quad (3.30)$$


The tangential component is in the same direction as the velocity if the particle is speeding up, and in the opposite direction if the particle is slowing down (**Fig. 3.30**). If the particle's speed is constant,  $a_{\text{tan}} = 0$ .

**CAUTION Uniform vs. nonuniform circular motion** The two quantities

$$\frac{d|\vec{v}|}{dt} \quad \text{and} \quad \left| \frac{d\vec{v}}{dt} \right|$$

are *not* the same. The first, equal to the tangential acceleration, is the rate of change of speed; it is zero whenever a particle moves with constant speed, even when its direction of motion changes (such as in *uniform* circular motion). The second is the magnitude of the vector acceleration; it is zero only when the particle's acceleration *vector* is zero—that is, when the particle moves in a straight line with constant speed. In *uniform* circular motion  $|d\vec{v}/dt| = a_{\text{rad}} = v^2/r$ ; in *nonuniform* circular motion there is also a tangential component of acceleration, so  $|d\vec{v}/dt| = \sqrt{a_{\text{rad}}^2 + a_{\text{tan}}^2}$ . **|**

Figure 3.30 A particle moving in a vertical loop with a varying speed, like a roller coaster car.

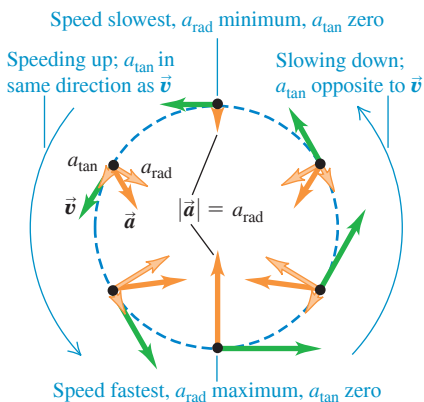

**TEST YOUR UNDERSTANDING OF SECTION 3.4** Suppose that the particle in Fig. 3.30 experiences four times the acceleration at the bottom of the loop as it does at the top of the loop. Compared to its speed at the top of the loop, is its speed at the bottom of the loop (i)  $\sqrt{2}$  times as great; (ii) 2 times as great; (iii)  $2\sqrt{2}$  times as great; (iv) 4 times as great; or (v) 16 times as great?

**ANSWER**

(ii) At both the top and bottom of the loop, the acceleration is purely radial and is given by Eq. (3.27). Radius  $R$  is the same at both points, so the difference in acceleration is due purely to differences in speed. Since  $a_{\text{rad}}$  is proportional to the square of  $v$ , the speed must be twice as great at the bottom of the loop as at the top. **|**

**3.5 RELATIVE VELOCITY**

If you stand next to a one-way highway, all the cars appear to be moving forward. But if you're driving in the fast lane on that highway, slower cars appear to be moving backward. In general, when two observers measure the velocity of the same object, they get different results if one observer is moving relative to the other. The velocity seen by a particular observer is called the velocity *relative* to that observer, or simply **relative velocity**. In many situations relative velocity is extremely important (**Fig. 3.31**).

We'll first consider relative velocity along a straight line and then generalize to relative velocity in a plane.

## Relative Velocity in One Dimension

A passenger walks with a velocity of  $+1.0$  m/s along the aisle of a train that is moving with a velocity of  $+3.0$  m/s (**Fig. 3.32a**). What is the passenger's velocity? It's a simple enough question, but it has no single answer. As seen by a second passenger sitting in the train, she is moving at  $+1.0$  m/s. A person on a bicycle standing beside the train sees the walking passenger moving at  $+1.0$  m/s  $+ 3.0$  m/s  $= +4.0$  m/s. An observer in another train going in the opposite direction would give still another answer. We have to specify which observer we mean, and we speak of the velocity *relative* to a particular observer. The walking passenger's velocity relative to the train is  $+1.0$  m/s, her velocity relative to the cyclist is  $+4.0$  m/s, and so on. Each observer, equipped in principle with a meter stick and a stopwatch, forms what we call a **frame of reference**. Thus a frame of reference is a coordinate system plus a time scale.

Let's use the symbol  $A$  for the cyclist's frame of reference (at rest with respect to the ground) and the symbol  $B$  for the frame of reference of the moving train. In straight-line motion the position of a point  $P$  relative to frame  $A$  is given by  $x_{P/A}$  (the position of  $P$  with respect to  $A$ ), and the position of  $P$  relative to frame  $B$  is given by  $x_{P/B}$  (**Fig. 3.32b**). The position of the origin of  $B$  with respect to the origin of  $A$  is  $x_{B/A}$ . **Figure 3.32b** shows that

$$x_{P/A} = x_{P/B} + x_{B/A} \quad (3.31)$$

In words, the coordinate of  $P$  relative to  $A$  equals the coordinate of  $P$  relative to  $B$  plus the coordinate of  $B$  relative to  $A$ .

The  $x$ -velocity of  $P$  relative to frame  $A$ , denoted by  $v_{P/A-x}$ , is the derivative of  $x_{P/A}$  with respect to time. We can find the other velocities in the same way. So the time derivative of Eq. (3.31) gives us a relationship among the various velocities:

$$\frac{dx_{P/A}}{dt} = \frac{dx_{P/B}}{dt} + \frac{dx_{B/A}}{dt} \quad \text{or}$$

$$\text{Relative velocity along a line: } v_{P/A-x} = v_{P/B-x} + v_{B/A-x} \quad (3.32)$$

$x$ -velocity of  $P$  relative to  $A$        $x$ -velocity of  $P$  relative to  $B$        $x$ -velocity of  $B$  relative to  $A$

Getting back to the passenger on the train in **Fig. 3.32a**, we see that  $A$  is the cyclist's frame of reference,  $B$  is the frame of reference of the train, and point  $P$  represents the passenger. Using the above notation, we have

$$v_{P/B-x} = +1.0 \text{ m/s} \quad v_{B/A-x} = +3.0 \text{ m/s}$$

From Eq. (3.32) the passenger's velocity  $v_{P/A-x}$  relative to the cyclist is

$$v_{P/A-x} = +1.0 \text{ m/s} + 3.0 \text{ m/s} = +4.0 \text{ m/s}$$

as we already knew.

In this example, both velocities are toward the right, and we have taken this as the positive  $x$ -direction. If the passenger walks toward the *left* relative to the train, then  $v_{P/B-x} = -1.0$  m/s, and her  $x$ -velocity relative to the cyclist is  $v_{P/A-x} = -1.0$  m/s  $+ 3.0$  m/s  $= +2.0$  m/s. The sum in Eq. (3.32) is always an algebraic sum, and any or all of the  $x$ -velocities may be negative.


When the passenger looks out the window, the stationary cyclist on the ground appears to her to be moving backward; we call the cyclist's velocity relative to her  $v_{A/P-x}$ . This is just the negative of the *passenger's* velocity relative to the *cyclist*,  $v_{P/A-x}$ . In general, if  $A$  and  $B$  are any two points or frames of reference,

$$v_{A/B-x} = -v_{B/A-x} \quad (3.33)$$

**Figure 3.31** Airshow pilots face a complicated problem involving relative velocities. They must keep track of their motion relative to the air (to maintain enough airflow over the wings to sustain lift), relative to each other (to keep a tight formation without colliding), and relative to their audience (to remain in sight of the spectators).



**Figure 3.32** (a) A passenger walking in a train. (b) The position of the passenger relative to the cyclist's frame of reference and the train's frame of reference.

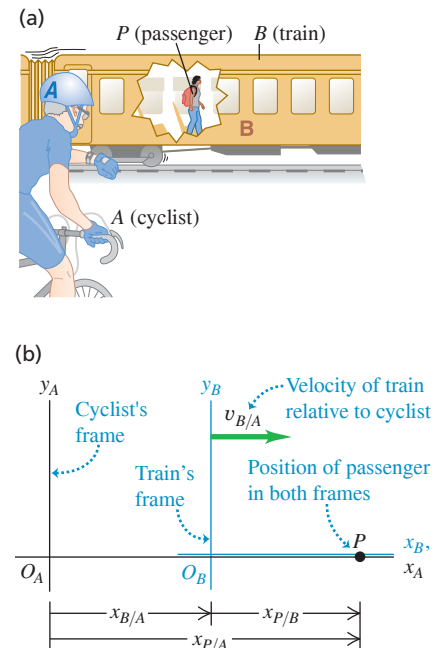

### PROBLEM-SOLVING STRATEGY 3.2 Relative Velocity

**IDENTIFY** *the relevant concepts:* Whenever you see the phrase “velocity relative to” or “velocity with respect to,” it’s likely that the concepts of relative velocity will be helpful.

**SET UP** *the problem:* Sketch and label each frame of reference in the problem. Each moving object has its own frame of reference; in addition, you’ll almost always have to include the frame of reference of the earth’s surface. (Statements such as “The car is traveling north at 90 km/h” implicitly refer to the car’s velocity relative to the surface of the earth.) Use the labels to help identify the target variable. For example, if you want to find the  $x$ -velocity of a car ( $C$ ) with respect to a bus ( $B$ ), your target variable is  $v_{C/B-x}$ .

**EXECUTE** *the solution:* Solve for the target variable using Eq. (3.32). (If the velocities aren’t along the same direction, you’ll need to use the vector form of this equation, derived later in this section.) It’s

important to note the order of the double subscripts in Eq. (3.32):  $v_{B/A-x}$  means “ $x$ -velocity of  $B$  relative to  $A$ .” These subscripts obey a kind of algebra. If we regard each one as a fraction, then the fraction on the left side is the *product* of the fractions on the right side:  $P/A = (P/B)(B/A)$ . You can apply this rule to any number of frames of reference. For example, if there are three frames of reference  $A$ ,  $B$ , and  $C$ , Eq. (3.32) becomes

$$v_{P/A-x} = v_{P/C-x} + v_{C/B-x} + v_{B/A-x}$$

**EVALUATE** *your answer:* Be on the lookout for stray minus signs in your answer. If the target variable is the  $x$ -velocity of a car relative to a bus ( $v_{C/B-x}$ ), make sure that you haven’t accidentally calculated the  $x$ -velocity of the *bus* relative to the *car* ( $v_{B/C-x}$ ). If you’ve made this mistake, you can recover by using Eq. (3.33).

### EXAMPLE 3.13 Relative velocity on a straight road

### WITH VARIATION PROBLEMS

You drive north on a straight two-lane road at a constant 88 km/h. A truck in the other lane approaches you at a constant 104 km/h (Fig. 3.33). Find (a) the truck’s velocity relative to you and (b) your velocity relative to the truck. (c) How do the relative velocities change after you and the truck pass each other? Treat this as a one-dimensional problem.

**IDENTIFY and SET UP** In this problem about relative velocities along a line, there are three reference frames: you ( $Y$ ), the truck ( $T$ ), and the earth’s surface ( $E$ ). Let the positive  $x$ -direction be north (Fig. 3.33). Then your  $x$ -velocity relative to the earth is  $v_{Y/E-x} = +88$  km/h. The truck is initially approaching you, so it is moving south and its  $x$ -velocity with respect to the earth is  $v_{T/E-x} = -104$  km/h. The target variables in parts (a) and (b) are  $v_{T/Y-x}$  and  $v_{Y/T-x}$ , respectively. We’ll use Eq. (3.32) to find the first target variable and Eq. (3.33) to find the second.

**EXECUTE** (a) To find  $v_{T/Y-x}$ , we write Eq. (3.32) for the known  $v_{T/E-x}$  and rearrange:

$$v_{T/E-x} = v_{T/Y-x} + v_{Y/E-x}$$

$$v_{T/Y-x} = v_{T/E-x} - v_{Y/E-x} = -104 \text{ km/h} - 88 \text{ km/h} = -192 \text{ km/h}$$

The truck is moving at 192 km/h in the negative  $x$ -direction (south) relative to you.


(b) From Eq. (3.33),

$$v_{Y/T-x} = -v_{T/Y-x} = -(-192 \text{ km/h}) = +192 \text{ km/h}$$

You are moving at 192 km/h in the positive  $x$ -direction (north) relative to the truck.

(c) The relative velocities *do not* change after you and the truck pass each other. The relative *positions* of the objects don’t matter. After

Figure 3.33 Reference frames for you and the truck.

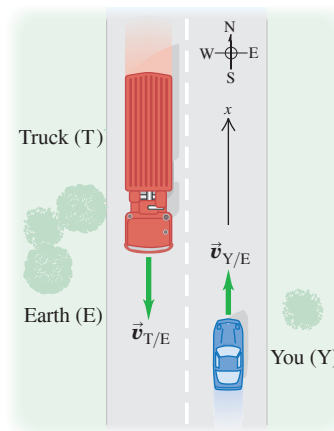

it passes you, the truck is still moving at 192 km/h toward the south relative to you, even though it is now moving away from you instead of toward you.


**EVALUATE** To check your answer in part (b), use Eq. (3.32) directly in the form  $v_{Y/T-x} = v_{Y/E-x} + v_{E/T-x}$ . (The  $x$ -velocity of the earth with respect to the truck is the opposite of the  $x$ -velocity of the truck with respect to the earth:  $v_{E/T-x} = -v_{T/E-x}$ .) Do you get the same result?

**KEYCONCEPT** To solve problems involving relative velocity along a line, use Eq. (3.32) and pay careful attention to the subscripts for the frames of reference in the problem.

### Relative Velocity in Two or Three Dimensions

Let’s extend the concept of relative velocity to include motion in a plane or in space. Suppose that the passenger in Fig. 3.32a is walking not down the aisle of the railroad car but from one side of the car to the other, with a speed of 1.0 m/s (Fig. 3.34a). We can again describe the passenger’s position  $P$  in two frames of reference:  $A$  for the stationary ground observer and  $B$  for the moving train. But instead of coordinates  $x$ , we use position

Figure 3.34 (a) A passenger walking across a railroad car. (b) Position of the passenger relative to the cyclist's frame and the train's frame. (c) Vector diagram for the velocity of the passenger relative to the ground (the cyclist's frame),  $\vec{v}_{P/A}$ .

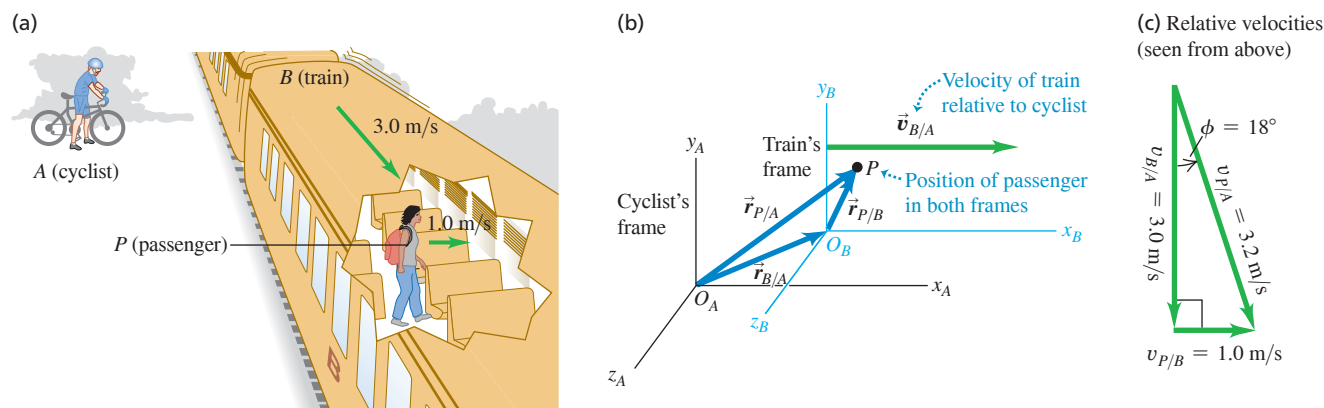

vectors  $\vec{r}$  because the problem is now two-dimensional. Then, as Fig. 3.34b shows,

$$\vec{r}_{P/A} = \vec{r}_{P/B} + \vec{r}_{B/A} \quad (3.34)$$

Just as we did before, we take the time derivative of this equation to get a relationship among the various velocities; the velocity of  $P$  relative to  $A$  is  $\vec{v}_{P/A} = d\vec{r}_{P/A}/dt$  and so on for the other velocities. We get

$$\vec{v}_{P/A} = \vec{v}_{P/B} + \vec{v}_{B/A} \quad (3.35)$$

Relative velocity in space:     
 Velocity of  $P$  relative to  $A$      
 Velocity of  $P$  relative to  $B$      
 Velocity of  $B$  relative to  $A$

Equation (3.35) is known as the *Galilean velocity transformation*. It relates the velocity of an object  $P$  with respect to frame  $A$  and its velocity with respect to frame  $B$  ( $\vec{v}_{P/A}$  and  $\vec{v}_{P/B}$ , respectively) to the velocity of frame  $B$  with respect to frame  $A$  ( $\vec{v}_{B/A}$ ). If all three of these velocities lie along the same line, then Eq. (3.35) reduces to Eq. (3.32) for the components of the velocities along that line.

If the train is moving at  $v_{B/A} = 3.0 \text{ m/s}$  relative to the ground and the passenger is moving at  $v_{P/B} = 1.0 \text{ m/s}$  relative to the train, then the passenger's velocity vector  $\vec{v}_{P/A}$  relative to the ground is as shown in Fig. 3.34c. The Pythagorean theorem then gives us

$$v_{P/A} = \sqrt{(3.0 \text{ m/s})^2 + (1.0 \text{ m/s})^2} = \sqrt{10 \text{ m}^2/\text{s}^2} = 3.2 \text{ m/s}$$

Figure 3.34c also shows that the *direction* of the passenger's velocity vector relative to the ground makes an angle  $\phi$  with the train's velocity vector  $\vec{v}_{B/A}$ , where

$$\tan \phi = \frac{v_{P/B}}{v_{B/A}} = \frac{1.0 \text{ m/s}}{3.0 \text{ m/s}} \quad \text{and} \quad \phi = 18^\circ$$

As in the case of motion along a straight line, we have the general rule that if  $A$  and  $B$  are any two points or frames of reference,


$$\vec{v}_{A/B} = -\vec{v}_{B/A} \quad (3.36)$$

The velocity of the passenger relative to the train is the negative of the velocity of the train relative to the passenger, and so on.

In the early 20th century Albert Einstein showed that Eq. (3.35) has to be modified when speeds approach the speed of light, denoted by  $c$ . It turns out that if the passenger in Fig. 3.32a could walk down the aisle at  $0.30c$  and the train could move at  $0.90c$ , then her speed relative to the ground would be not  $1.20c$  but  $0.94c$ ; nothing can travel faster than light! We'll return to Einstein and his *special theory of relativity* in Chapter 37.

### APPLICATION Relative Velocities near the Speed of Light

This image shows a spray of subatomic particles produced by the head-on collision of two protons moving in opposite directions. Relative to the laboratory, before the collision each proton is moving only 11 m/s slower than the speed of light,  $c = 3.00 \times 10^8 \text{ m/s}$ . According to the Galilean velocity transformation, the velocity of one proton relative to the other should be approximately  $c + c = 2c$ . But Einstein's special theory of relativity shows that the relative velocity of the two protons must be slower than the speed of light: In fact it is equal to  $c$  minus 0.19 millimeter per second.

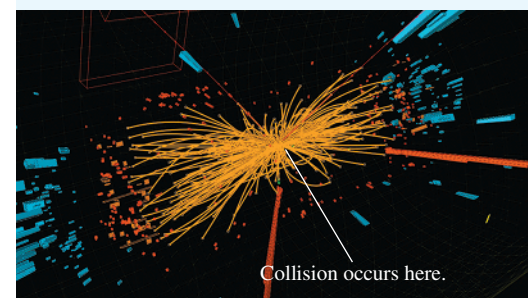

## EXAMPLE 3.14 Flying in a crosswind

WITH **V**ARIATION PROBLEMS

An airplane's compass indicates that it is headed due north, and its airspeed indicator shows that it is moving through the air at 240 km/h. If there is a 100 km/h wind from west to east, what is the velocity of the airplane relative to the earth?

**IDENTIFY and SET UP** This problem involves velocities in two dimensions (northward and eastward), so it is a relative-velocity problem using vectors. We are given the magnitude and direction of the velocity of the plane (P) relative to the air (A). We are also given the magnitude and direction of the wind velocity, which is the velocity of the air A with respect to the earth (E):

$$\vec{v}_{P/A} = 240 \text{ km/h} \quad \text{due north}$$

$$\vec{v}_{A/E} = 100 \text{ km/h} \quad \text{due east}$$

We'll use Eq. (3.35) to find our target variables: the magnitude and direction of velocity  $\vec{v}_{P/E}$  of the plane relative to the earth.

**EXECUTE** From Eq. (3.35) we have


$$\vec{v}_{P/E} = \vec{v}_{P/A} + \vec{v}_{A/E}$$

**Figure 3.35** shows that the three relative velocities constitute a right-triangle vector addition; the unknowns are the speed  $v_{P/E}$  and the angle  $\alpha$ . We find

$$v_{P/E} = \sqrt{(240 \text{ km/h})^2 + (100 \text{ km/h})^2} = 260 \text{ km/h}$$

$$\alpha = \arctan\left(\frac{100 \text{ km/h}}{240 \text{ km/h}}\right) = 23^\circ \text{ E of N}$$

**Figure 3.35** The plane is pointed north, but the wind blows east, giving the resultant velocity  $\vec{v}_{P/E}$  relative to the earth.

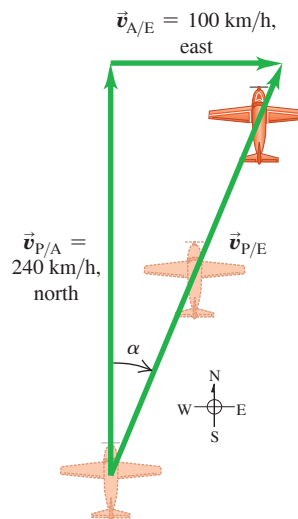

**EVALUATE** You can check the results by taking measurements on the scale drawing in Fig. 3.35. The crosswind increases the speed of the airplane relative to the earth, but pushes the airplane off course.

**KEYCONCEPT** To solve problems involving relative velocity in a plane or in space, use Eq. (3.35). Pay careful attention to the subscripts for the frames of reference in the problem.

## EXAMPLE 3.15 Correcting for a crosswind

WITH **V**ARIATION PROBLEMS

With wind and airspeed as in Example 3.14, in what direction should the pilot head to travel due north? What will be her velocity relative to the earth?

**IDENTIFY and SET UP** Like Example 3.14, this is a relative-velocity problem with vectors. **Figure 3.36** is a scale drawing of the situation. Again the vectors add in accordance with Eq. (3.35) and form a right triangle:

$$\vec{v}_{P/E} = \vec{v}_{P/A} + \vec{v}_{A/E}$$

As Fig. 3.36 shows, the pilot points the nose of the airplane at an angle  $\beta$  into the wind to compensate for the crosswind. This angle, which tells us the direction of the vector  $\vec{v}_{P/A}$  (the velocity of the airplane relative to the air), is one of our target variables. The other target variable is the speed of the airplane over the ground, which is the magnitude of the vector  $\vec{v}_{P/E}$  (the velocity of the airplane relative to the earth). The known and unknown quantities are


$$\vec{v}_{P/E} = \text{magnitude unknown} \quad \text{due north}$$

$$\vec{v}_{P/A} = 240 \text{ km/h} \quad \text{direction unknown}$$

$$\vec{v}_{A/E} = 100 \text{ km/h} \quad \text{due east}$$

We'll solve for the target variables by using Fig. 3.36 and trigonometry.

**Figure 3.36** The pilot must point the plane in the direction of the vector  $\vec{v}_{P/A}$  to travel due north relative to the earth.

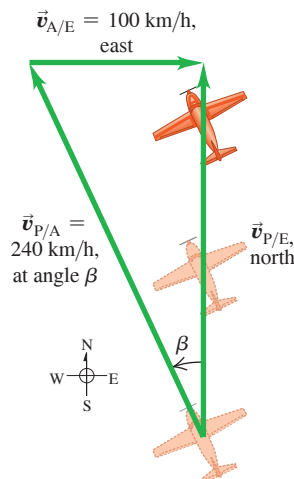

**EXECUTE** From Fig. 3.36 the speed  $v_{P/E}$  and the angle  $\beta$  are

$$v_{P/E} = \sqrt{(240 \text{ km/h})^2 - (100 \text{ km/h})^2} = 218 \text{ km/h}$$

$$\beta = \arcsin\left(\frac{100 \text{ km/h}}{240 \text{ km/h}}\right) = 25^\circ$$

The pilot should point the airplane  $25^\circ$  west of north, and her ground speed is then 218 km/h.

**EVALUATE** There were two target variables—the magnitude of a vector and the direction of a vector—in both this example and Example

3.14. In Example 3.14 the magnitude and direction referred to the *same* vector ( $\vec{v}_{P/E}$ ); here they refer to *different* vectors ( $\vec{v}_{P/E}$  and  $\vec{v}_{P/A}$ ).

While we expect a *headwind* to reduce an airplane's speed relative to the ground, this example shows that a *crosswind* does, too. That's an unfortunate fact of aeronautical life.

**KEYCONCEPT** The vector equation for relative velocity in a plane, Eq. (3.35), allows you to solve for two unknowns, such as an unknown vector magnitude and an unknown direction.

**TEST YOUR UNDERSTANDING OF SECTION 3.5** Suppose the nose of an airplane is pointed due east and the airplane has an airspeed of 150 km/h. Due to the wind, the airplane is moving due *north* relative to the ground and its speed relative to the ground is 150 km/h. What is the velocity of the air relative to the earth? (i) 150 km/h from east to west; (ii) 150 km/h from south to north; (iii) 150 km/h from southeast to northwest; (iv) 212 km/h from east to west; (v) 212 km/h from south to north; (vi) 212 km/h from southeast to northwest; (vii) there is no possible wind velocity that could cause this.

**ANSWER**

(vi) The effect of the wind is to cancel the airplane's eastward motion and give it a northward motion. So the velocity of the air relative to the ground (the wind velocity) must have one 150 km/h component to the west and one 150 km/h component to the north. The combination of these is a vector of magnitude  $\sqrt{(150 \text{ km/h})^2 + (150 \text{ km/h})^2} = 212 \text{ km/h}$  that points to the northwest.

## CHAPTER 3 SUMMARY

**Position, velocity, and acceleration vectors:** The position vector  $\vec{r}$  of a point  $P$  in space is the vector from the origin to  $P$ . Its components are the coordinates  $x$ ,  $y$ , and  $z$ .

The average velocity vector  $\vec{v}_{av}$  during the time interval  $\Delta t$  is the displacement  $\Delta\vec{r}$  (the change in position vector  $\vec{r}$ ) divided by  $\Delta t$ . The instantaneous velocity vector  $\vec{v}$  is the time derivative of  $\vec{r}$ , and its components are the time derivatives of  $x$ ,  $y$ , and  $z$ . The instantaneous speed is the magnitude of  $\vec{v}$ . The velocity  $\vec{v}$  of a particle is always tangent to the particle's path. (See Example 3.1.)

The average acceleration vector  $\vec{a}_{av}$  during the time interval  $\Delta t$  equals  $\Delta\vec{v}$  (the change in velocity vector  $\vec{v}$ ) divided by  $\Delta t$ . The instantaneous acceleration vector  $\vec{a}$  is the time derivative of  $\vec{v}$ , and its components are the time derivatives of  $v_x$ ,  $v_y$ , and  $v_z$ . (See Example 3.2.)

The component of acceleration parallel to the direction of the instantaneous velocity affects the speed, while the component of  $\vec{a}$  perpendicular to  $\vec{v}$  affects the direction of motion. (See Examples 3.3 and 3.4.)

$$\vec{r} = x\hat{i} + y\hat{j} + z\hat{k} \quad (3.1)$$

$$\vec{v}_{av} = \frac{\vec{r}_2 - \vec{r}_1}{t_2 - t_1} = \frac{\Delta\vec{r}}{\Delta t} \quad (3.2)$$

$$\vec{v} = \lim_{\Delta t \rightarrow 0} \frac{\Delta\vec{r}}{\Delta t} = \frac{d\vec{r}}{dt} \quad (3.3)$$

$$v_x = \frac{dx}{dt} \quad v_y = \frac{dy}{dt} \quad v_z = \frac{dz}{dt} \quad (3.4)$$



$$\vec{a}_{av} = \frac{\vec{v}_2 - \vec{v}_1}{t_2 - t_1} = \frac{\Delta\vec{v}}{\Delta t} \quad (3.8)$$

$$\vec{a} = \lim_{\Delta t \rightarrow 0} \frac{\Delta\vec{v}}{\Delta t} = \frac{d\vec{v}}{dt} \quad (3.9)$$

$$a_x = \frac{dv_x}{dt} \quad (3.10)$$

$$a_y = \frac{dv_y}{dt}$$

$$a_z = \frac{dv_z}{dt}$$

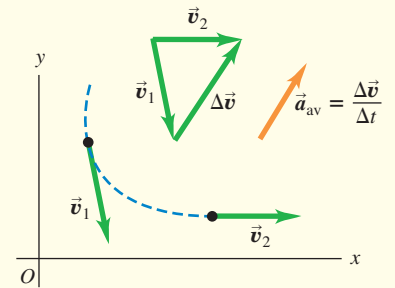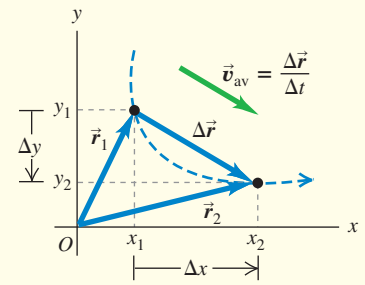


**Projectile motion:** In projectile motion with no air resistance,  $a_x = 0$  and  $a_y = -g$ . The coordinates and velocity components are simple functions of time, and the shape of the path is always a parabola. We usually choose the origin to be at the initial position of the projectile. (See Examples 3.5–3.10.)

$$x = (v_0 \cos \alpha_0)t \quad (3.19)$$

$$y = (v_0 \sin \alpha_0)t - \frac{1}{2}gt^2 \quad (3.20)$$

$$v_x = v_0 \cos \alpha_0 \quad (3.21)$$

$$v_y = v_0 \sin \alpha_0 - gt \quad (3.22)$$




**Uniform and nonuniform circular motion:** When a particle moves in a circular path of radius  $R$  with constant speed  $v$  (uniform circular motion), its acceleration  $\vec{a}$  is directed toward the center of the circle and perpendicular to  $\vec{v}$ . The magnitude  $a_{rad}$  of this radial acceleration can be expressed in terms of  $v$  and  $R$  or in terms of  $R$  and the period  $T$  (the time for one revolution), where  $v = 2\pi R/T$ . (See Examples 3.11 and 3.12.)

If the speed is not constant in circular motion (nonuniform circular motion), there is still a radial component of  $\vec{a}$  given by Eq. (3.27) or (3.29), but there is also a component of  $\vec{a}$  parallel (tangential) to the path. This tangential component is equal to the rate of change of speed,  $dv/dt$ .

$$a_{rad} = \frac{v^2}{R} \quad (3.27)$$

$$a_{rad} = \frac{4\pi^2 R}{T^2} \quad (3.29)$$




**Relative velocity:** When an object  $P$  moves relative to an object (or reference frame)  $B$ , and  $B$  moves relative to an object (or reference frame)  $A$ , we denote the velocity of  $P$  relative to  $B$  by  $\vec{v}_{P/B}$ , the velocity of  $P$  relative to  $A$  by  $\vec{v}_{P/A}$ , and the velocity of  $B$  relative to  $A$  by  $\vec{v}_{B/A}$ . If these velocities are all along the same line, their components along that line are related by Eq. (3.32). More generally, these velocities are related by Eq. (3.35). (See Examples 3.13–3.15.)

$$v_{P/A-x} = v_{P/B-x} + v_{B/A-x} \quad (3.32)$$


(relative velocity along a line)

$$\vec{v}_{P/A} = \vec{v}_{P/B} + \vec{v}_{B/A} \quad (3.35)$$

(relative velocity in space)







## GUIDED PRACTICE

For assigned homework and other learning materials, go to Mastering Physics.

### KEY EXAMPLE **V**ARIATION PROBLEMS

Be sure to review **EXAMPLES 3.6, 3.7, 3.8, and 3.9** (Section 3.3) before attempting these problems. In all problems, ignore air resistance.

**VP3.9.1** You launch a projectile from level ground at a speed of 25.0 m/s and an angle of  $36.9^\circ$  above the horizontal. (a) How long after it is launched does the projectile reach its maximum height above the ground, and what is that maximum height? (b) How long after the projectile is launched does it return to ground level, and how far from its launch point does it land?

**VP3.9.2** You throw a baseball at an angle of  $30.0^\circ$  above the horizontal. It reaches the highest point of its trajectory 1.05 s later. (a) At what speed does the baseball leave your hand? (b) What is the maximum height above the launch point that the baseball reaches?

**VP3.9.3** You toss a walnut at a speed of 15.0 m/s at an angle of  $50.0^\circ$  above the horizontal. The launch point is on the roof of a building that is 20.0 m above the ground. (a) How long after it is launched does the walnut reach the ground? (b) How far does the walnut travel horizontally from launch point to landing point? (c) What are the horizontal and vertical components of the walnut's velocity just before it reaches the ground?

**VP3.9.4** You use a slingshot to launch a potato horizontally from the edge of a cliff with speed  $v_0$ . The acceleration due to gravity is  $g$ . Take the origin at the launch point. (a) How long after you launch the potato has it moved as far horizontally from the launch point as it has moved vertically? What are the coordinates of the potato at this time? (b) How long after you launch the potato is it moving in a direction exactly  $45^\circ$  below the horizontal? What are the coordinates of the potato at this time?

Be sure to review **EXAMPLES 3.11 and 3.12** (Section 3.4) before attempting these problems.

**VP3.12.1** A cyclist going around a circular track at 10.0 m/s has a centripetal acceleration of  $5.00 \text{ m/s}^2$ . What is the radius of the curve?

**VP3.12.2** A race car is moving at 40.0 m/s around a circular racetrack of radius 265 m. Calculate (a) the period of the motion and (b) the car's centripetal acceleration.

**VP3.12.3** The wheel of a stationary exercise bicycle at your gym makes one rotation in 0.670 s. Consider two points on this wheel: Point  $P$  is 10.0 cm from the rotation axis, and point  $Q$  is 20.0 cm from the rotation axis. Find (a) the speed of each point on the spinning wheel and (b) the centripetal acceleration of each point. (c) For points on this spinning wheel, as the distance from the axis increases, does the speed increase or decrease? Does the centripetal acceleration increase or decrease?

**VP3.12.4** The planets Venus, Earth, and Mars all move in approximately circular orbits around the sun. Use the data in the table to find (a) the speed of each planet in its orbit and (b) the centripetal acceleration of each planet. (c) As the size of a planet's orbit increases, does the speed increase or decrease? Does the centripetal acceleration increase or decrease?

Planet	Orbital radius (m)	Orbital period (days)
Venus	$1.08 \times 10^{11}$	225
Earth	$1.50 \times 10^{11}$	365
Mars	$2.28 \times 10^{11}$	687

**VP3.12.5** Object  $A$  is moving at speed  $v$  in a circle of radius  $R$ . Object  $B$  is moving at speed  $2v$  in a circle of radius  $R/2$ . (a) What is the ratio of the period of object  $A$  to the period of object  $B$ ? (b) What is the ratio of the centripetal acceleration of object  $A$  to the centripetal acceleration of object  $B$ ?

Be sure to review **EXAMPLES 3.13, 3.14, and 3.15** (Section 3.5) before attempting these problems.

**VP3.15.1** A police car in a high-speed chase is traveling north on a two-lane highway at 35.0 m/s. In the southbound lane of the same highway, an SUV is moving at 18.0 m/s. Take the positive  $x$ -direction to be toward the north. Find the  $x$ -velocity of (a) the police car relative to the SUV and (b) the SUV relative to the police car.

**VP3.15.2** Race cars  $A$  and  $B$  are driving on the same circular race-track at the same speed of 45.0 m/s. At a given instant car  $A$  is on the north side of the track moving eastward and car  $B$  is on the south side of the track moving westward. Find the velocity vector (magnitude and direction) of (a) car  $A$  relative to car  $B$  and (b) car  $B$  relative to car  $A$ . (c) Does the relative velocity have a component along the line connecting the two cars? Are the two cars approaching each other, moving away from each other, or neither?

**VP3.15.3** Two vehicles approach an intersection: a truck moving eastbound at 16.0 m/s and an SUV moving southbound at 20.0 m/s. Find the velocity vector (magnitude and direction) of (a) the truck relative to the SUV and (b) the SUV relative to the truck.

**VP3.15.4** A jet is flying due north relative to the ground. The speed of the jet relative to the ground is 155 m/s. The wind at the jet's altitude is 40.0 m/s toward the northeast ( $45.0^\circ$  north of east). Find the speed of the jet relative to the air (its airspeed) and the direction in which the pilot of the jet must point the plane so that it travels due north relative to the ground.

### BRIDGING PROBLEM Launching Up an Incline


You fire a ball with an initial speed  $v_0$  at an angle  $\phi$  above the surface of an incline, which is itself inclined at an angle  $\theta$  above the horizontal (**Fig. 3.37**). (a) Find the distance, measured along the incline, from the launch point to the point when the ball strikes the incline. (b) What angle  $\phi$  gives the maximum range, measured along the incline? Ignore air resistance.

#### SOLUTION GUIDE

#### IDENTIFY and SET UP

1. Since there's no air resistance, this is a problem in projectile motion. The goal is to find the point where the ball's parabolic trajectory intersects the incline.

Figure 3.37 Launching a ball from an inclined ramp.



Continued

- Choose the  $x$ - and  $y$ -axes and the position of the origin. When in doubt, use the suggestions given in Problem-Solving Strategy 3.1 in Section 3.3.
- In the projectile equations in Section 3.3, the launch angle  $\alpha_0$  is measured from the horizontal. What is this angle in terms of  $\theta$  and  $\phi$ ? What are the initial  $x$ - and  $y$ -components of the ball's initial velocity?
- You'll need to write an equation that relates  $x$  and  $y$  for points along the incline. What is this equation? (This takes just geometry and trigonometry, not physics.)

**EXECUTE**

- Write the equations for the  $x$ -coordinate and  $y$ -coordinate of the ball as functions of time  $t$ .

- When the ball hits the incline,  $x$  and  $y$  are related by the equation that you found in step 4. Based on this, at what time  $t$  does the ball hit the incline?
- Based on your answer from step 6, at what coordinates  $x$  and  $y$  does the ball land on the incline? How far is this point from the launch point?
- What value of  $\phi$  gives the *maximum* distance from the launch point to the landing point? (Use your knowledge of calculus.)

**EVALUATE**

- Check your answers for the case  $\theta = 0$ , which corresponds to the incline being horizontal rather than tilted. (You already know the answers for this case. Do you know why?)

**PROBLEMS**

•, ••, •••: Difficulty levels. **CP**: Cumulative problems incorporating material from earlier chapters. **CALC**: Problems requiring calculus. **DATA**: Problems involving real data, scientific evidence, experimental design, and/or statistical reasoning. **BIO**: Biosciences problems.

**DISCUSSION QUESTIONS**

**Q3.1** A simple pendulum (a mass swinging at the end of a string) swings back and forth in a circular arc. What is the direction of the acceleration of the mass when it is at the ends of the swing? At the midpoint? In each case, explain how you obtained your answer.

**Q3.2** Redraw Fig. 3.11a if  $\vec{a}$  is antiparallel to  $\vec{v}_1$ . Does the particle move in a straight line? What happens to its speed?

**Q3.3** A projectile moves in a parabolic path without air resistance. Is there any point at which  $\vec{a}$  is parallel to  $\vec{v}$ ? Perpendicular to  $\vec{v}$ ? Explain.

**Q3.4** A book slides off a horizontal tabletop. As it leaves the table's edge, the book has a horizontal velocity of magnitude  $v_0$ . The book strikes the floor in time  $t$ . If the initial velocity of the book is doubled to  $2v_0$ , what happens to (a) the time the book is in the air, (b) the horizontal distance the book travels while it is in the air, and (c) the speed of the book just before it reaches the floor? In particular, does each of these quantities stay the same, double, or change in another way? Explain.

**Q3.5** At the instant that you fire a bullet horizontally from a rifle, you drop a bullet from the height of the gun barrel. If there is no air resistance, which bullet hits the level ground first? Explain.

**Q3.6** A package falls out of an airplane that is flying in a straight line at a constant altitude and speed. If you ignore air resistance, what would be the path of the package as observed by the pilot? As observed by a person on the ground?

**Q3.7** Sketch the six graphs of the  $x$ - and  $y$ -components of position, velocity, and acceleration versus time for projectile motion with  $x_0 = y_0 = 0$  and  $0 < \alpha_0 < 90^\circ$ .

**Q3.8** If a jumping frog can give itself the same initial speed regardless of the direction in which it jumps (forward or straight up), how is the maximum vertical height to which it can jump related to its maximum horizontal range  $R_{\max} = v_0^2/g$ ?

**Q3.9** A projectile is fired upward at an angle  $\theta$  above the horizontal with an initial speed  $v_0$ . At its maximum height, what are its velocity vector, its speed, and its acceleration vector?

**Q3.10** In uniform circular motion, what are the *average* velocity and *average* acceleration for one revolution? Explain.

**Q3.11** In uniform circular motion, how does the acceleration change when the speed is increased by a factor of 3? When the radius is decreased by a factor of 2?

**Q3.12** In uniform circular motion, the acceleration is perpendicular to the velocity at every instant. Is this true when the motion is not uniform—that is, when the speed is not constant?


**Q3.13** Raindrops hitting the side windows of a car in motion often leave diagonal streaks even if there is no wind. Why? Is the explanation the same or different for diagonal streaks on the windshield?

**Q3.14** In a rainstorm with a strong wind, what determines the best position in which to hold an umbrella?

**Q3.15** You are on the west bank of a river that is flowing north with a speed of 1.2 m/s. Your swimming speed relative to the water is 1.5 m/s, and the river is 60 m wide. What is your path relative to the earth that allows you to cross the river in the shortest time? Explain your reasoning.

**Q3.16** A stone is thrown into the air at an angle above the horizontal and feels negligible air resistance. Which graph in Fig. Q3.16 best depicts the stone's *speed*  $v$  as a function of time  $t$  while it is in the air?

Figure Q3.16

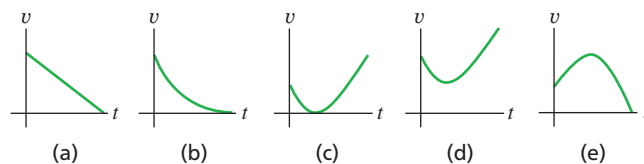**EXERCISES****Section 3.1 Position and Velocity Vectors**

**3.1** • A squirrel has  $x$ - and  $y$ -coordinates (1.5 m, 2.9 m) at time  $t_1 = 0$  and coordinates (5.9 m,  $-0.6$  m) at time  $t_2 = 3.0$  s. For this time interval, find (a) the components of the average velocity, and (b) the magnitude and direction of the average velocity.

**3.2** • A rhinoceros is at the origin of coordinates at time  $t_1 = 0$ . For the time interval from  $t_1 = 0$  to  $t_2 = 12.5$  s, the rhino's average velocity has  $x$ -component  $-4.0$  m/s and  $y$ -component 4.3 m/s. At time  $t_2 = 12.5$  s, (a) what are the  $x$ - and  $y$ -coordinates of the rhino? (b) How far is the rhino from the origin?

**3.3 •• CALC** A web page designer creates an animation in which a dot on a computer screen has position

$$\vec{r} = [4.4 \text{ cm} + (2.8 \text{ cm/s}^2)t^2]\hat{i} + (5.5 \text{ cm/s})t\hat{j}.$$

(a) Find the magnitude and direction of the dot's average velocity between  $t = 0$  and  $t = 2.0$  s. (b) Find the magnitude and direction of the instantaneous velocity at  $t = 0$ ,  $t = 1.0$  s, and  $t = 2.0$  s. (c) Sketch the dot's trajectory from  $t = 0$  to  $t = 2.0$  s, and show the velocities calculated in part (b).

**3.4 • CALC** The position of a squirrel running in a park is given by  $\vec{r} = [(0.280 \text{ m/s})t + (0.0360 \text{ m/s}^2)t^2]\hat{i} + (0.0190 \text{ m/s}^3)t^3\hat{j}$ . (a) What are  $v_x(t)$  and  $v_y(t)$ , the  $x$ - and  $y$ -components of the velocity of the squirrel, as functions of time? (b) At  $t = 5.74$  s, how far is the squirrel from its initial position? (c) At  $t = 5.74$  s, what are the magnitude and direction of the squirrel's velocity?

### Section 3.2 The Acceleration Vector

**3.5 •** A jet plane is flying at a constant altitude. At time  $t_1 = 0$ , it has components of velocity  $v_x = 88 \text{ m/s}$ ,  $v_y = 115 \text{ m/s}$ . At time  $t_2 = 30.0$  s, the components are  $v_x = -175 \text{ m/s}$ ,  $v_y = 35 \text{ m/s}$ . (a) Sketch the velocity vectors at  $t_1$  and  $t_2$ . How do these two vectors differ? For this time interval calculate (b) the components of the average acceleration, and (c) the magnitude and direction of the average acceleration.

**3.6 ••** A dog running in an open field has components of velocity  $v_x = 3.2 \text{ m/s}$  and  $v_y = -1.8 \text{ m/s}$  at  $t_1 = 11.1$  s. For the time interval from  $t_1 = 11.1$  s to  $t_2 = 24.9$  s, the average acceleration of the dog has magnitude  $0.54 \text{ m/s}^2$  and direction  $33.5^\circ$  measured from the  $+x$ -axis toward the  $+y$ -axis. At  $t_2 = 24.9$  s, (a) what are the  $x$ - and  $y$ -components of the dog's velocity? (b) What are the magnitude and direction of the dog's velocity? (c) Sketch the velocity vectors at  $t_1$  and  $t_2$ . How do these two vectors differ?

**3.7 •• CALC** The coordinates of a bird flying in the  $xy$ -plane are given by  $x(t) = at$  and  $y(t) = 3.0 \text{ m} - \beta t^2$ , where  $\alpha = 2.4 \text{ m/s}$  and  $\beta = 1.2 \text{ m/s}^2$ . (a) Sketch the path of the bird between  $t = 0$  and  $t = 2.0$  s. (b) Calculate the velocity and acceleration vectors of the bird as functions of time. (c) Calculate the magnitude and direction of the bird's velocity and acceleration at  $t = 2.0$  s. (d) Sketch the velocity and acceleration vectors at  $t = 2.0$  s. At this instant, is the bird's speed increasing, decreasing, or not changing? Is the bird turning? If so, in what direction?


**3.8 • CALC** A remote-controlled car is moving in a vacant parking lot. The velocity of the car as a function of time is given by  $\vec{v} = [5.00 \text{ m/s} - (0.0180 \text{ m/s}^3)t^2]\hat{i} + [2.00 \text{ m/s} + (0.550 \text{ m/s}^2)t]\hat{j}$ . (a) What are  $a_x(t)$  and  $a_y(t)$ , the  $x$ - and  $y$ -components of the car's velocity as functions of time? (b) What are the magnitude and direction of the car's velocity at  $t = 6.87$  s? (c) What are the magnitude and direction of the car's acceleration at  $t = 6.87$  s?

### SECTION 3.3 Projectile Motion

**3.9 •** A physics book slides off a horizontal tabletop with a speed of  $1.40 \text{ m/s}$ . It strikes the floor in  $0.320$  s. Ignore air resistance. Find (a) the height of the tabletop above the floor; (b) the horizontal distance from the edge of the table to the point where the book strikes the floor; (c) the horizontal and vertical components of the book's velocity, and the magnitude and direction of its velocity, just before the book reaches the floor. (d) Draw  $x$ - $t$ ,  $y$ - $t$ ,  $v_x$ - $t$ , and  $v_y$ - $t$  graphs for the motion.

**3.10 ••** A daring  $510 \text{ N}$  swimmer dives off a cliff with a running horizontal leap, as shown in **Fig. E3.10**. What must her minimum speed be just as she leaves the top of the cliff so that she will miss the ledge at the bottom, which is  $1.75 \text{ m}$  wide and  $9.00 \text{ m}$  below the top of the cliff?

Figure E3.10



**3.11 •** Crickets Chirpy and Milada jump from the top of a vertical cliff. Chirpy drops downward and reaches the ground in  $3.10$  s, while Milada jumps horizontally with an initial speed of  $94.0 \text{ cm/s}$ . How far from the base of the cliff will Milada hit the ground? Ignore air resistance.

**3.12 •** You throw a basketball with an initial upward velocity component of  $8.0 \text{ m/s}$  and a horizontal velocity component of  $12.0 \text{ m/s}$ . Ignore air resistance. (a) How much time is required for the basketball to reach the highest point of the trajectory? (b) How high is this point? (c) How much time (after it is thrown) is required for the basketball to return to its original level? How does this compare with the time calculated in part (a)? (d) How far has the basketball traveled horizontally during this time? (e) Draw  $x$ - $t$ ,  $y$ - $t$ ,  $v_x$ - $t$ , and  $v_y$ - $t$  graphs for the motion.

**3.13 •• Leaping the River I.** During a storm, a car traveling on a level horizontal road comes upon a bridge that has washed out. The driver must get to the other side, so he decides to try leaping the river with his car. The side of the road the car is on is  $21.5 \text{ m}$  above the river, while the opposite side is only  $2.0 \text{ m}$  above the river. The river itself is a raging torrent  $57.0 \text{ m}$  wide. (a) How fast should the car be traveling at the time it leaves the road in order just to clear the river and land safely on the opposite side? (b) What is the speed of the car just before it lands on the other side?

**3.14 • BIO The Champion Jumper of the Insect World.** The frog-hopper, *Philaenus spumarius*, holds the world record for insect jumps. When leaping at an angle of  $58.0^\circ$  above the horizontal, some of the tiny critters have reached a maximum height of  $58.7 \text{ cm}$  above the level ground. (See *Nature*, Vol. 424, July 31, 2003, p. 509.) Neglect air resistance in answering the following. (a) What was the takeoff speed for such a leap? (b) What horizontal distance did the froghopper cover for this world-record leap?

**3.15 ••** Inside a starship at rest on the earth, a ball rolls off the top of a horizontal table and lands a distance  $D$  from the foot of the table. This starship now lands on the unexplored Planet X. The commander, Captain Curious, rolls the same ball off the same table with the same initial speed as on earth and finds that it lands a distance  $2.72D$  from the foot of the table. What is the acceleration due to gravity on Planet X?


**3.16 •** On level ground a shell is fired with an initial velocity of  $71.0 \text{ m/s}$  at  $55.9^\circ$  above the horizontal and feels no appreciable air resistance. (a) Find the horizontal and vertical components of the shell's initial velocity. (b) How long does it take the shell to reach its highest point? (c) Find its maximum height above the ground. (d) How far from its firing point does the shell land? (e) At its highest point, find the horizontal and vertical components of its acceleration and velocity.

**3.17 •** A major leaguer hits a baseball so that it leaves the bat at a speed of  $33.0 \text{ m/s}$  and at an angle of  $38.5^\circ$  above the horizontal. Ignore air resistance. (a) At what *two* times is the baseball at a height of  $10.7 \text{ m}$  above the point at which it left the bat? (b) Calculate the horizontal and vertical components of the baseball's velocity at each of the two times calculated in part (a). (c) What are the magnitude and direction of the baseball's velocity when it returns to the level at which it left the bat?

**3.18 •** A shot putter releases the shot some distance above the level ground with a velocity of 12.0 m/s,  $51.0^\circ$  above the horizontal. The shot hits the ground 2.08 s later. Ignore air resistance. (a) What are the components of the shot's acceleration while in flight? (b) What are the components of the shot's velocity at the beginning and at the end of its trajectory? (c) How far did she throw the shot horizontally? (d) Why does the expression for  $R$  in Example 3.8 *not* give the correct answer for part (c)? (e) How high was the shot above the ground when she released it? (f) Draw  $x-t$ ,  $y-t$ ,  $v_x-t$ , and  $v_y-t$  graphs for the motion.

**3.19 •• Win the Prize.** At a funfair stall, you can win a plush giraffe toy if you toss a coin into a small dish. The dish is on a shelf above the point where the coin leaves your hand and is a horizontal distance of 2.1 m from this point (**Fig. E3.19**). If you toss the coin with a velocity of 6.4 m/s at an angle of  $60^\circ$  above the horizontal, the coin will land in the dish. Ignore air resistance. (a) What is the height of the shelf above the point where the coin leaves your hand? (b) What is the vertical component of the velocity of the coin just before it lands in the dish?

Figure E3.19

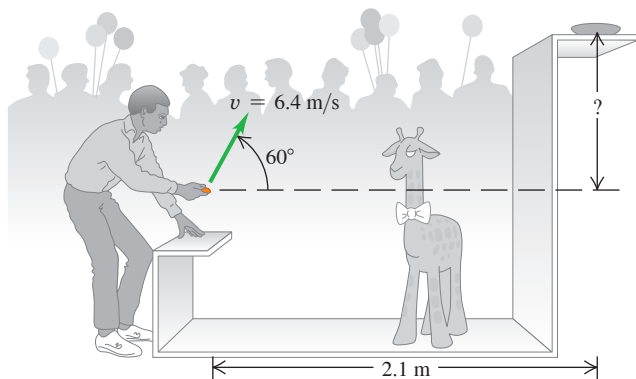

**3.20 •** Firefighters use a high-pressure hose to shoot a stream of water at a burning building. The water has a speed of 25.0 m/s as it leaves the end of the hose and then exhibits projectile motion. The firefighters adjust the angle of elevation  $\alpha$  of the hose until the water takes 3.00 s to reach a building 45.0 m away. Ignore air resistance; assume that the end of the hose is at ground level. (a) Find  $\alpha$ . (b) Find the speed and acceleration of the water at the highest point in its trajectory. (c) How high above the ground does the water strike the building, and how fast is it moving just before it hits the building?

**3.21 ••** A man stands on the roof of a 15.0-m-tall building and throws a rock with a speed of 30.0 m/s at an angle of  $33.0^\circ$  above the horizontal. Ignore air resistance. Calculate (a) the maximum height above the roof that the rock reaches; (b) the speed of the rock just before it strikes the ground; and (c) the horizontal range from the base of the building to the point where the rock strikes the ground. (d) Draw  $x-t$ ,  $y-t$ ,  $v_x-t$ , and  $v_y-t$  graphs for the motion.

**3.22 ••** At  $t = 0$  a rock is projected from ground level with a speed of 15.0 m/s and at an angle of  $53.0^\circ$  above the horizontal. Neglect air resistance. At what two times  $t$  is the rock 5.00 m above the ground? At each of these two times, what are the horizontal and vertical components of the velocity of the rock? Let  $v_{0x}$  and  $v_{0y}$  be in the positive  $x$ - and  $y$ -directions, respectively.

**3.23 •** Estimate the maximum horizontal distance that you can throw a basketball. (a) Based on your estimate, what is the speed of the basketball as it leaves your hand? (b) If you could throw the basketball

straight up at the same speed as in part (a), how high would it go? (c) The value of  $g$  on Mars is  $3.7 \text{ m/s}^2$ . What horizontal distance can you throw a basketball on Mars if you throw it with the same initial speed as in part (a)?

### Section 3.4 Motion in a Circle

**3.24 •** Merry-go-rounds are a common ride in park playgrounds. The ride is a horizontal disk that rotates about a vertical axis at their center. A typical size is a diameter of 3.6 m. A rider sits at the outer edge of the disk and holds onto a metal bar while someone pushes on the ride to make it rotate. Estimate a typical time for one rotation. (a) For your estimated time, what is the speed of the rider, in m/s? (b) What is the rider's radial acceleration, in  $\text{m/s}^2$ ? (c) What is the rider's radial acceleration if the time for one rotation is halved?

**3.25 •** The earth has a radius of 6380 km and turns around once on its axis in 24 h. (a) What is the radial acceleration of an object at the earth's equator? Give your answer in  $\text{m/s}^2$  and as a fraction of  $g$ . (b) If  $a_{\text{rad}}$  at the equator is greater than  $g$ , objects will fly off the earth's surface and into space. (We'll see the reason for this in Chapter 5.) What would the period of the earth's rotation have to be for this to occur?

**3.26 •• BIO Dizziness.** Our balance is maintained, at least in part, by the endolymph fluid in the inner ear. Spinning displaces this fluid, causing dizziness. Suppose that a skater is spinning very fast at 2.8 revolutions per second about a vertical axis through the center of his head. Take the inner ear to be approximately 7.0 cm from the axis of spin. (The distance varies from person to person.) What is the radial acceleration (in  $\text{m/s}^2$  and in  $g$ 's) of the endolymph fluid?


**3.27 •** A small ball is attached to the lower end of a 0.800-m-long string, and the other end of the string is tied to a horizontal rod. The string makes a constant angle of  $37.0^\circ$  with the vertical as the ball moves at a constant speed in a horizontal circle. If it takes the ball 0.600 s to complete one revolution, what is the magnitude of the radial acceleration of the ball?

**3.28 ••** A model of a helicopter rotor has four blades, each 3.00 m long from the central shaft to the blade tip. The model is rotated in a wind tunnel at 470 rev/min. (a) What is the linear speed of the blade tip, in m/s? (b) What is the radial acceleration of the blade tip expressed as a multiple of  $g$ ?

**3.29 • BIO Pilot Blackout in a Power Dive.** A jet plane comes in for a downward dive as shown in **Fig. E3.29**. The bottom part of the path is a quarter circle with a radius of curvature of 280 m. According to medical tests, pilots will lose consciousness when they pull out of a dive at an upward acceleration greater than  $5.5g$ . At what minimum speed (in m/s and in km/h) will the pilot blackout during this dive?


**3.30 •** An object moves in a horizontal circle at constant speed  $v$  (in units of m/s). It takes the object  $T$  seconds to complete one revolution. Derive an expression that gives the radial acceleration of the ball in terms of  $v$  and  $T$ , but not  $r$ . (a) If the speed doubles, by what factor must the period  $T$  change if  $a_{\text{rad}}$  is to remain unchanged? (b) If the radius doubles, by what factor must the period change to keep  $a_{\text{rad}}$  the same?

Figure E3.29



**3.31 •** A Ferris wheel with radius 14.0 m is turning about a horizontal axis through its center (Fig. E3.31). The linear speed of a passenger on the rim is constant and equal to 7.13 m/s. What are the magnitude and direction of the passenger's acceleration as she passes through (a) the lowest point in her circular motion and (b) the highest point in her circular motion? (c) How much time does it take the Ferris wheel to make one revolution?

Figure E3.31



**3.32 •** A roller coaster car moves in a vertical circle of radius  $R$ . At the top of the circle the car has speed  $v_1$ , and at the bottom of the circle it has speed  $v_2$ , where  $v_2 > v_1$ . (a) When the car is at the top of its circular path, what is the direction of its radial acceleration,  $a_{\text{rad, top}}$ ? (b) When the car is at the bottom of its circular path, what is the direction of its radial acceleration,  $a_{\text{rad, bottom}}$ ? (c) In terms of  $v_1$  and  $v_2$ , what is the ratio  $a_{\text{rad, bottom}}/a_{\text{rad, top}}$ ?

**3.33 •• BIO Hypergravity.** TsF-18 at the Yuri Gagarin Cosmonaut Training Centre, Star City, Russia, is the world's largest centrifuge. It is used to test the effects of very large accelerations ("hypergravity") on test pilots, cosmonauts, and astronauts. In this device, an arm 18.00 m long rotates about one end in a horizontal plane, and an astronaut is strapped in a seat at the other end, with their back parallel to the floor, is aligned along the centrifuge's arm. The device can reach up to 30g, but a typical acceleration to which humans are subjected in it is between 4g and 9g. (a) How fast must the astronaut's head be moving to experience a 9g acceleration (suppose that it is at the outermost end of the centrifuge's arm)? (b) What is the difference between the acceleration of their head and feet (suppose that the horizontal distance between the top of the head and the feet is 1.40 m; remember that the astronaut is seated during the process!)? (c) How fast in rpm (rev/min) is the arm turning to produce a 9g acceleration?

**3.34 •** The radius of the earth's orbit around the sun (assumed to be circular) is  $1.50 \times 10^8$  km, and the earth travels around this orbit in 365 days. (a) What is the magnitude of the orbital velocity of the earth, in m/s? (b) What is the magnitude of the radial acceleration of the earth toward the sun, in  $\text{m/s}^2$ ? (c) Repeat parts (a) and (b) for the motion of the planet Mercury (orbit radius =  $5.79 \times 10^7$  km, orbital period = 88.0 days).


### Section 3.5 Relative Velocity

**3.35 •** A travelator in an airport terminal moves at 1.4 m/s and is 32.0 m long. If a woman steps on at one end and walks at 1.7 m/s relative to the travelator how much time does it take her to reach the opposite end if she walks (a) in the same direction the travelator is moving? (b) In the opposite direction?

**3.36 •** A flat wagon is traveling to the right at a speed of 13.0 m/s relative to an observer standing on the ground. Someone is riding a motor scooter on the flat wagon (Fig. E3.36). What is the velocity (magnitude and direction) of the scooter relative to the wagon if the scooter's velocity relative to the observer on the ground is (a) 18.0 m/s to the right? (b) 3.0 m/s to the left? (c) zero?


**3.37 ••** A canoe has a velocity of 0.41 m/s southeast relative to the earth. The canoe is on a river that is flowing 0.60 m/s east relative to the earth. Find the velocity (magnitude and direction) of the canoe relative to the river.

Figure E3.36

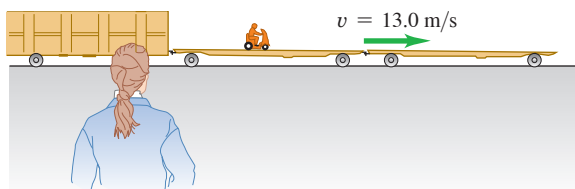

**3.38 •** Two piers, A and B, are located on a river; B is 1500 m downstream from A (Fig. E3.38). Two friends must make round trips from pier A to pier B and return. One rows a boat at a constant speed of 4.00 km/h relative to the water; the other walks on the shore at a constant speed of 4.00 km/h. The velocity of the river is 2.80 km/h in the direction from A to B. How much time does it take each person to make the round trip?

Figure E3.38

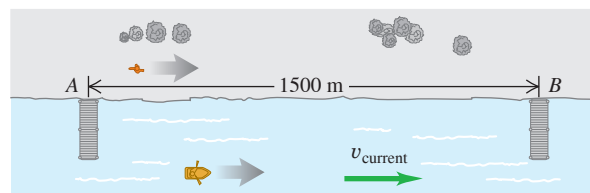

**3.39 •• BIO Bird Migration.** Canada geese migrate essentially along a north–south direction for well over a thousand kilometers in some cases, traveling at speeds up to about 100 km/h. If one goose is flying at 100 km/h relative to the air but a 50 km/h wind is blowing from west to east, (a) at what angle relative to the north–south direction should this bird head to travel directly southward relative to the ground? (b) How long will it take the goose to cover a ground distance of 550 km from north to south? (Note: Even on cloudy nights, many birds can navigate by using the earth's magnetic field to fix the north–south direction.)

**3.40 ••** The nose of an ultralight plane is pointed due south, and its airspeed indicator shows 35 m/s. The plane is in a 10 m/s wind blowing toward the southwest relative to the earth. (a) In a vector-addition diagram, show the relationship of  $\vec{v}_{P/E}$  (the velocity of the plane relative to the earth) to the two given vectors. (b) Let  $x$  be east and  $y$  be north, and find the components of  $\vec{v}_{P/E}$ . (c) Find the magnitude and direction of  $\vec{v}_{P/E}$ .

**3.41 • Crossing the River I.** A river flows due south with a speed of 2.0 m/s. You steer a motorboat across the river; your velocity relative to the water is 4.2 m/s due east. The river is 500 m wide. (a) What is your velocity (magnitude and direction) relative to the earth? (b) How much time is required to cross the river? (c) How far south of your starting point will you reach the opposite bank?

**3.42 • Crossing the River II.** (a) In which direction should the motorboat in Exercise 3.41 head to reach a point on the opposite bank directly east from your starting point? (The boat's speed relative to the water remains 4.2 m/s.) (b) What is the velocity of the boat relative to the earth? (c) How much time is required to cross the river?

**3.43 ••** An airplane pilot wishes to fly due west. A wind of 80.0 km/h is blowing toward the south. (a) If the airspeed of the plane (its speed in still air) is 320.0 km/h, in which direction should the pilot head? (b) What is the speed of the plane over the ground? Draw a vector diagram.

### PROBLEMS


**3.44 •• CPCALC** A dog in an open field is at rest under a tree at time  $t = 0$  and then runs with acceleration  $\vec{a}(t) = (0.400 \text{ m/s}^2)\hat{i} - (0.180 \text{ m/s}^3)t\hat{j}$ . How far is the dog from the tree 8.00 s after it starts to run?

**3.45 •• CALC** If  $\vec{r} = bt^2\hat{i} + ct^3\hat{j}$ , where  $b$  and  $c$  are positive constants, when does the velocity vector make an angle of  $45.0^\circ$  with the  $x$ - and  $y$ -axes?

**3.46 ••• CALC** A faulty model rocket moves in the  $xy$ -plane (the positive  $y$ -direction is vertically upward). The rocket's acceleration has components  $a_x(t) = \alpha t^2$  and  $a_y(t) = \beta - \gamma t$ , where  $\alpha = 2.50 \text{ m/s}^4$ ,  $\beta = 9.00 \text{ m/s}^2$ , and  $\gamma = 1.40 \text{ m/s}^3$ . At  $t = 0$  the rocket is at the origin and has velocity  $\vec{v}_0 = v_{0x}\hat{i} + v_{0y}\hat{j}$  with  $v_{0x} = 1.00 \text{ m/s}$  and  $v_{0y} = 7.00 \text{ m/s}$ . (a) Calculate the velocity and position vectors as functions of time. (b) What is the maximum height reached by the rocket? (c) What is the horizontal displacement of the rocket when it returns to  $y = 0$ ?

**3.47 ••• CP** A test rocket starting from rest at point  $A$  is launched by accelerating it along a  $200.0\text{-m}$  incline at  $1.48 \text{ m/s}^2$  (Fig. P3.47). The incline rises at  $35.0^\circ$  above the horizontal, and at the instant the rocket leaves it, the engines turn off and the rocket is subject to gravity only (ignore air resistance). Find (a) the maximum height above the ground that the rocket reaches, and (b) the rocket's greatest horizontal range beyond point  $A$ .

Figure P3.47



**3.48 •• CALC** The position of a dragonfly that is flying parallel to the ground is given as a function of time by  $\vec{r} = [2.90 \text{ m} + (0.0900 \text{ m/s}^2)t^2]\hat{i} - (0.0150 \text{ m/s}^3)t^3\hat{j}$ . (a) At what value of  $t$  does the velocity vector of the dragonfly make an angle of  $32.0^\circ$  clockwise from the  $+x$ -axis? (b) At the time calculated in part (a), what are the magnitude and direction of the dragonfly's acceleration vector?

**3.49 ••** In fighting forest fires, airplanes work in support of ground crews by dropping water on the fires. For practice, a pilot drops a canister of red dye, hoping to hit a target on the ground below. If the plane is flying in a horizontal path  $90.0 \text{ m}$  above the ground and has a speed of  $62.0 \text{ m/s}$  at what horizontal distance from the target should the pilot release the canister? Ignore air resistance.

**3.50 •• CALC** A bird flies in the  $xy$ -plane with a velocity vector given by  $\vec{v} = (\alpha - \beta t^2)\hat{i} + \gamma t\hat{j}$ , with  $\alpha = 2.4 \text{ m/s}$ ,  $\beta = 1.6 \text{ m/s}^3$ , and  $\gamma = 4.0 \text{ m/s}^2$ . The positive  $y$ -direction is vertically upward. At  $t = 0$  the bird is at the origin. (a) Calculate the position and acceleration vectors of the bird as functions of time. (b) What is the bird's altitude ( $y$ -coordinate) as it flies over  $x = 0$  for the first time after  $t = 0$ ?


**3.51 •••** A movie stuntwoman drops from a helicopter that is  $30.0 \text{ m}$  above the ground and moving with a constant velocity whose components are  $10.0 \text{ m/s}$  upward and  $15.0 \text{ m/s}$  horizontal and toward the south. Ignore air resistance. (a) Where on the ground (relative to the position of the helicopter when she drops) should the stuntwoman have placed foam mats to break her fall? (b) Draw  $x$ - $t$ ,  $y$ - $t$ ,  $v_x$ - $t$ , and  $v_y$ - $t$  graphs of her motion.

**3.52 ••** A cannon, located  $60.0 \text{ m}$  from the base of a vertical  $25.0\text{-m}$ -tall cliff, shoots a  $15 \text{ kg}$  shell at  $43.0^\circ$  above the horizontal toward the cliff. (a) What must the minimum muzzle velocity be for the shell to clear the top of the cliff? (b) The ground at the top of the cliff is level, with a constant elevation of  $25.0 \text{ m}$  above the cannon. Under the conditions of part (a), how far does the shell land past the edge of the cliff?

**3.53 • CP CALC** A toy rocket is launched with an initial velocity of  $15.0 \text{ m/s}$  in the horizontal direction from the roof of a  $39.0\text{-m}$ -tall building. The rocket's engine produces a horizontal acceleration of  $(1.60 \text{ m/s}^3)t$ , in the same direction as the initial velocity, but in the vertical direction the acceleration is  $g$ , downward. Ignore air resistance. What horizontal distance does the rocket travel before reaching the ground?

**3.54 •••** An important piece of landing equipment must be thrown to a ship, which is moving at  $45.0 \text{ cm/s}$ , before the ship can dock. This equipment is thrown at  $15.0 \text{ m/s}$  at  $60.0^\circ$  above the horizontal from the top of a tower at the edge of the water,  $8.75 \text{ m}$  above the ship's deck (Fig. P3.54). For this equipment to land at the front of the ship, at what distance  $D$  from the dock should the ship be when the equipment is thrown? Ignore air resistance.

Figure P3.54

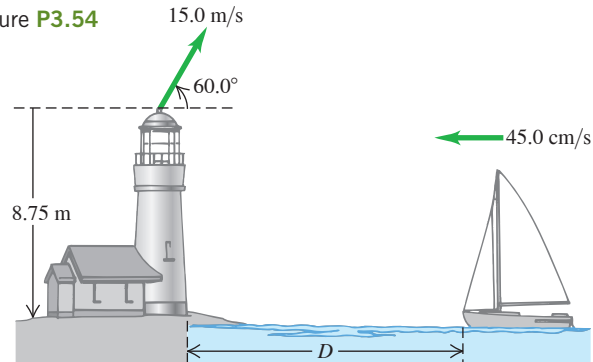


**3.55 ••** A cricket ball thrown at an angle of  $60.0^\circ$  above the horizontal strikes a building  $18.0 \text{ m}$  away at a point  $8.00 \text{ m}$  above the point from which it is thrown. Ignore air resistance. (a) Find the magnitude of the ball's initial velocity (the velocity with which the ball is thrown). (b) Find the magnitude and direction of the velocity of the ball just before it strikes the building.

**3.56 •• An Errand of Mercy.** An airplane is dropping bales of hay to cattle stranded in a blizzard on the Great Plains. The pilot releases the bales at  $180 \text{ m}$  above the level ground when the plane is flying at  $80 \text{ m/s}$  in a direction  $60^\circ$  above the horizontal. How far in front of the cattle should the pilot release the hay so that the bales land at the point where the cattle are stranded?


**3.57 ••** A grasshopper leaps into the air from the edge of a vertical cliff, as shown in Fig. P3.57. Find (a) the initial speed of the grasshopper and (b) the height of the cliff.

Figure P3.57



**3.58 •••** A water hose is used to fill a large cylindrical storage tank of diameter  $D$  and height  $2D$ . The hose shoots the water at  $45^\circ$  above the horizontal from the same level as the base of the tank and is a distance  $6D$  away (Fig. P3.58). For what range of launch speeds ( $v_0$ ) will the water enter the tank? Ignore air resistance, and express your answer in terms of  $D$  and  $g$ .


Figure P3.58

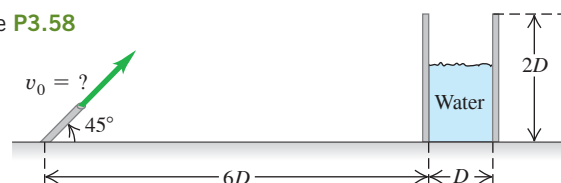

**3.59 ••** An object is projected with initial speed  $v_0$  from the edge of the roof of a building that has height  $H$ . The initial velocity of the object makes an angle  $\alpha_0$  with the horizontal. Neglect air resistance. (a) If  $\alpha_0$  is  $90^\circ$ , so that the object is thrown straight up (but misses the roof on the way down), what is the speed  $v$  of the object just before it strikes the ground? (b) If  $\alpha_0 = -90^\circ$ , so that the object is thrown straight down, what is its speed just before it strikes the ground? (c) Derive an expression for the speed  $v$  of the object just before it strikes the ground for general  $\alpha_0$ . (d) The final speed  $v$  equals  $v_1$  when  $\alpha_0$  equals  $\alpha_1$ . If  $\alpha_0$  is increased, does  $v$  increase, decrease, or stay the same?


**3.60 •• Kicking an Extra Point.** In Canadian football, after a touchdown the team has the opportunity to earn one more point by kicking the ball over the bar between the goal posts. Football regulations are stated in British units (see Appendix C): the bar is 10 feet (3.05 m) above the ground, and the ball is kicked from ground level, 32 yards (29.26 m) horizontally from the bar (Fig. P3.60). (a) There is a minimum angle above the ground such that if the ball is launched below this angle, it can never clear the bar, no matter how fast it is kicked. What is this angle? (b) If the ball is kicked at  $45.0^\circ$  above the horizontal, what must its initial speed be if it is just to clear the bar? Express your answer in m/s and in km/h.

Figure P3.60

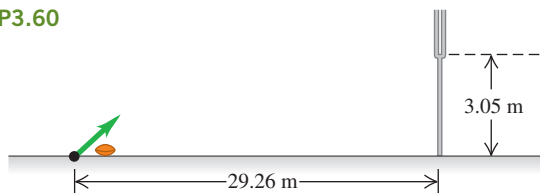

**3.61 ••• Look Out!** A snowball rolls off a barn roof that slopes downward at an angle of  $40^\circ$  (Fig. P3.61). The edge of the roof is 14.0 m above the ground, and the snowball has a speed of 7.00 m/s as it rolls off the roof. Ignore air resistance. (a) How far from the edge of the barn does the snowball strike the ground if it doesn't strike anything else while falling? (b) Draw  $x-t$ ,  $y-t$ ,  $v_x-t$ , and  $v_y-t$  graphs for the motion in part (a). (c) A man 1.9 m tall is standing 4.0 m from the edge of the barn. Will the snowball hit him?


Figure P3.61

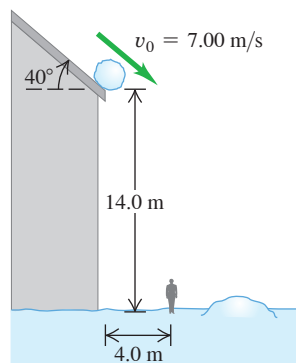

**3.62 •** A 2.7 kg ball is thrown upward with an initial speed of 20.0 m/s from the edge of a 45.0-m-high cliff. At the instant the ball is thrown, a woman starts running away from the base of the cliff with a constant speed of 6.00 m/s. The woman runs in a straight line on level ground. Ignore air resistance on the ball. (a) At what angle above the horizontal should the ball be thrown so that the runner will catch it just before it hits the ground, and how far does she run before she catches the ball? (b) Carefully sketch the ball's trajectory as viewed by (i) a person at rest on the ground and (ii) the runner.

**3.63 •• Leaping the River II.** A physics professor did daredevil stunts in his spare time. His last stunt was an attempt to jump across a river on a motorcycle (Fig. P3.63). The takeoff ramp was inclined at  $53.0^\circ$ , the river was 40.0 m wide, and the far bank was 15.0 m lower than the top of the ramp. The river itself was 100 m below the ramp. Ignore air resistance. (a) What should his speed have been at the top of the ramp to have just made it to the edge of the far bank? (b) If his speed was only half the value found in part (a), where did he land?


Figure P3.63

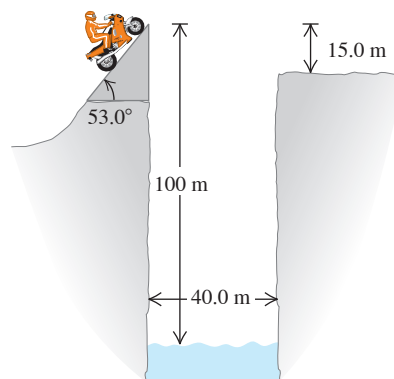

**3.64 •• Tossing Your Lunch.** Henrietta is jogging along the pavement at 3.0 m/s on the way to her physics class. Bruce realizes that she forgot her bag of bagels, so he runs to the window, which is 43.8 m above the street level and directly above the pavement, to throw the bag to her. He throws it horizontally 9.00 s after she has passed below the window, and she catches it on the run. Ignore air resistance. (a) With what initial speed must Bruce throw the bagels so that Henrietta can catch the bag just before it hits the ground? (b) Where is Henrietta when she catches the bagels?

**3.65 •** A 76.0 kg rock is rolling horizontally at the top of a vertical cliff that is 20 m above the surface of a lake (Fig. P3.65). The top of the vertical face of a dam is located 100 m from the foot of the cliff, with the top of the dam level with the surface of the water in the lake. A level plain is 25 m below the top of the dam. (a) What must be the minimum speed of the rock just as it leaves the cliff so that it will reach the plain without striking the dam? (b) How far from the foot of the dam does the rock hit the plain?

Figure P3.65

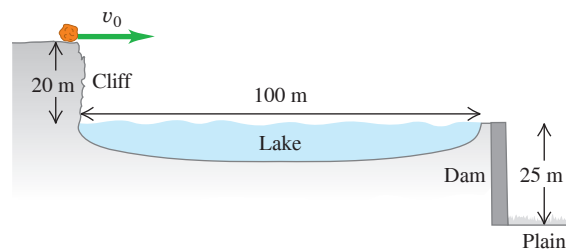

**3.66 ••** A firefighting crew uses a water cannon that shoots water at 25.0 m/s at a fixed angle of  $53.0^\circ$  above the horizontal. The firefighters want to direct the water at a blaze that is 10.0 m above ground level. How far from the building should they position their cannon? There are *two* possibilities; can you get them both? (Hint: Start with a sketch showing the trajectory of the water.)

**3.67 ••** On a level football pitch a football is projected from ground level. It has speed 8.0 m/s when it is at its maximum height. It travels a horizontal distance of 50.0 m. Neglect air resistance. How long is the ball in the air?

**3.68 •••** You are standing on a loading dock at the top of a flat ramp that is at a constant angle  $\alpha_0$  below the horizontal. You slide a small box horizontally off the loading dock with speed  $v_0$  in a direction so that it lands on the ramp. How far vertically downward does the box travel before it strikes the ramp?

**3.69 •••** In the middle of the night you are standing a horizontal distance of 14.0 m from the high fence that surrounds the estate of your rich uncle. The top of the fence is 5.00 m above the ground. You have taped an important message to a rock that you want to throw over the fence. The ground is level, and the width of the fence is small enough to be ignored. You throw the rock from a height of 1.60 m above the ground and at an angle of  $56.0^\circ$  above the horizontal. (a) What minimum initial speed must the rock have as it leaves your hand to clear the top of the fence? (b) For the initial velocity calculated in part (a), what horizontal distance beyond the fence will the rock land on the ground?

**3.70 •••** A small object is projected from level ground with an initial velocity of magnitude 16.0 m/s and directed at an angle of  $60.0^\circ$  above the horizontal. (a) What is the horizontal displacement of the object when it is at its maximum height? How does your result compare to the horizontal range  $R$  of the object? (b) What is the vertical displacement of the object when its horizontal displacement is 80.0% of its horizontal range  $R$ ? How does your result compare to the maximum height  $h_{\max}$  reached by the object? (c) For when the object has horizontal displacement  $x - x_0 = \alpha R$ , where  $\alpha$  is a positive constant, derive an expression (in terms of  $\alpha$ ) for  $(y - y_0)/h_{\max}$ . Your result should not depend on the initial velocity or the angle of projection. Show that your expression gives the correct result when  $\alpha = 0.80$ , as is the case in part (b). Also show that your expression gives the correct result for  $\alpha = 0$ ,  $\alpha = 0.50$ , and  $\alpha = 1.0$ .

**3.71 ••** An airplane pilot sets a compass course due west and maintains an airspeed of 214 km/h. After flying for 0.470 h, she finds herself over a town 123 km west and 12 km south of her starting point. (a) Find the wind velocity (magnitude and direction). (b) If the wind velocity is 40 km/h due south, in what direction should the pilot set her course to travel due west? Use the same airspeed of 214 km/h.

**3.72 •• Raindrops.** When a train's velocity is 12.0 m/s eastward, raindrops that are falling vertically with respect to the earth make traces that are inclined  $30.0^\circ$  to the vertical on the windows of the train. (a) What is the horizontal component of a drop's velocity with respect to the earth? With respect to the train? (b) What is the magnitude of the velocity of the raindrop with respect to the earth? With respect to the train?


**3.73 •••** In a World Cup football match, Juan is running due north toward the goal with a speed of 7.30 m/s relative to the ground. A teammate passes the ball to him. The ball has a speed of 13.3 m/s and is moving in a direction  $30.6^\circ$  east of north, relative to the ground. What are the magnitude and direction of the ball's velocity relative to Juan?

**3.74 ••** A shortstop is running due east as he throws a baseball to the catcher, who is standing at home plate. The velocity of the baseball relative to the shortstop is 6.00 m/s in the direction due south, and the speed of the baseball relative to the catcher is 9.00 m/s. What is the speed of the shortstop relative to the ground when he throws the ball?

**3.75 ••** Two football players, Mia and Alice, are running as Alice passes the ball to Mia. Mia is running due north with a speed of 6.30 m/s. The velocity of the ball relative to Mia is 6.80 m/s in a direction  $30.0^\circ$  east of south. What are the magnitude and direction of the velocity of the ball relative to the ground?

**3.76 •• DATA** A spring-gun projects a small rock from the ground with speed  $v_0$  at an angle  $\theta_0$  above the ground. You have been asked to determine  $v_0$ . From the way the spring-gun is constructed, you know that to a good approximation  $v_0$  is independent of the launch angle. You go to a level, open field, select a launch angle, and measure the horizontal distance the rock travels. You use  $g = 9.80 \text{ m/s}^2$  and ignore the small height of the end of the spring-gun's barrel above the ground. Since your measurement includes some uncertainty in values measured for the launch angle and for the horizontal range, you repeat the measurement for several launch angles and obtain the results given in **Fig. 3.76**. You ignore air resistance because there is no wind and the rock is small and heavy. (a) Select a way to represent the data well as a straight line. (b) Use the slope of the best straight-line fit to your data from part (a) to calculate  $v_0$ . (c) When the launch angle is  $36.9^\circ$ , what maximum height above the ground does the rock reach?

Figure P3.76

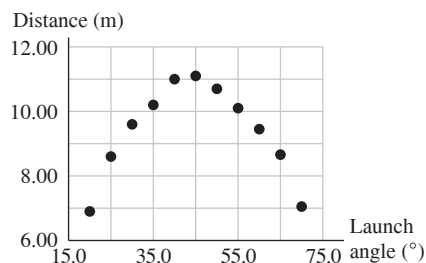

**3.77 •• DATA** You have constructed a hair-spray-powered potato gun and want to find the muzzle speed  $v_0$  of the potatoes, the speed they have as they leave the end of the gun barrel. You use the same amount of hair spray each time you fire the gun, and you have confirmed by repeated firings at the same height that the muzzle speed is approximately the same for each firing. You climb on a microwave relay tower (with permission, of course) to launch the potatoes horizontally from different heights above the ground. Your friend measures the height of the gun barrel above the ground and the range  $R$  of each potato. You obtain the data in the table.

Launch height $h$	Horizontal range $R$
2.00 m	10.4 m
6.00 m	17.1 m
9.00 m	21.3 m
12.00 m	25.8 m

Each of the values of  $h$  and  $R$  has some measurement error: The muzzle speed is not precisely the same each time, and the barrel isn't precisely horizontal. So you use all of the measurements to get the best estimate of  $v_0$ . No wind is blowing, so you decide to ignore air resistance. You use  $g = 9.80 \text{ m/s}^2$  in your analysis. (a) Select a way to represent the data well as a straight line. (b) Use the slope of the best-fit line from part (a) to calculate the average value of  $v_0$ . (c) What would be the horizontal range of a potato that is fired from ground level at an angle of  $30.0^\circ$  above the horizontal? Use the value of  $v_0$  that you calculated in part (b).

**3.78 ••• DATA** You are a member of a geological team in Central Africa. Your team comes upon a wide river that is flowing east. You must determine the width of the river and the current speed (the speed of the water relative to the earth). You have a small boat with an outboard motor. By measuring the time it takes to cross a pond where the water isn't flowing, you have calibrated the throttle settings to the speed of the boat in still water. You set the throttle so that the speed of the boat relative to the river is a constant 6.00 m/s. Traveling due north across the river, you reach the opposite bank in 20.1 s. For the return trip, you change the throttle setting so that the speed of the boat relative to the water is 9.00 m/s. You travel due south from one bank to the other and cross the river in 11.2 s. (a) How wide is the river, and what is the current speed? (b) With the throttle set so that the speed of the boat relative to the water is 6.00 m/s, what is the shortest time in which you could cross the river, and where on the far bank would you land?



## CHALLENGE PROBLEMS

**3.79** ●●● **CALC** A projectile thrown from a point  $P$  moves in such a way that its distance from  $P$  is always increasing. Find the maximum angle above the horizontal with which the projectile could have been thrown. Ignore air resistance.

**3.80** ●●● Two students are canoeing on a river. While heading upstream, they accidentally drop an empty bottle overboard. They then continue paddling for 60 minutes, reaching a point 2.0 km farther upstream. At this point they realize that the bottle is missing and, driven by ecological awareness, they turn around and head downstream. They catch up with and retrieve the bottle (which has been moving along with the current) 5.0 km downstream from the turnaround point. (a) Assuming a constant paddling effort throughout, how fast is the river flowing? (b) What would the canoe speed in a still lake be for the same paddling effort?

**3.81** ●●● **CP** A rocket designed to place small payloads into orbit is carried to an altitude of 12.0 km above sea level by a converted airliner. When the airliner is flying in a straight line at a constant speed of 850 km/h, the rocket is dropped. After the drop, the airliner maintains the same altitude and speed and continues to fly in a straight line. The rocket falls for a brief time, after which its rocket motor turns on. Once that motor is on, the combined effects of thrust and gravity give the rocket a constant acceleration of magnitude  $3.00g$  directed at an angle of  $30.0^\circ$  above the horizontal. For safety, the rocket should be at least 1.00 km in front of the airliner when it climbs through the airliner's altitude. Your job is to determine the minimum time that the rocket must fall before its engine starts. Ignore air resistance. Your answer should include (i) a diagram showing the flight paths of both the rocket and the airliner, labeled at several points with vectors for their velocities and accelerations; (ii) an  $x$ - $t$  graph showing the motions of both the rocket and the airliner; and (iii) a  $y$ - $t$  graph showing the motions of both the rocket and the airliner. In the diagram and the graphs, indicate when the rocket is dropped, when the rocket motor turns on, and when the rocket climbs through the altitude of the airliner.

## MCAT-STYLE PASSAGE PROBLEMS

**BIO Ballistic Seed Dispersal.** Some plants disperse their seeds when the fruit splits and contracts, propelling the seeds through the air. The trajectory of these seeds can be determined with a high-speed camera. In an experiment on one type of plant, seeds are projected at 20 cm above ground level with initial speeds between 2.3 m/s and 4.6 m/s. The launch angle is measured from the horizontal, with  $+90^\circ$  corresponding to an initial velocity straight up and  $-90^\circ$  straight down.

**3.82** The experiment is designed so that the seeds move no more than 0.20 mm between photographic frames. What minimum frame rate for the high-speed camera is needed to achieve this? (a) 250 frames/s; (b) 2500 frames/s; (c) 25,000 frames/s; (d) 250,000 frames/s.

**3.83** About how long does it take a seed launched at  $90^\circ$  at the highest possible initial speed to reach its maximum height? Ignore air resistance. (a) 0.23 s; (b) 0.47 s; (c) 1.0 s; (d) 2.3 s.

**3.84** If a seed is launched at an angle of  $0^\circ$  with the maximum initial speed, how far from the plant will it land? Ignore air resistance, and assume that the ground is flat. (a) 20 cm; (b) 93 cm; (c) 2.2 m; (d) 4.6 m.

**3.85** A large number of seeds are observed, and their initial launch angles are recorded. The range of projection angles is found to be  $-51^\circ$  to  $75^\circ$ , with a mean of  $31^\circ$ . Approximately 65% of the seeds are launched between  $6^\circ$  and  $56^\circ$ . (See W. J. Garrison et al., "Ballistic seed projection in two herbaceous species," *Amer. J. Bot.*, Sept. 2000, 87:9, 1257–64.) Which of these hypotheses is best supported by the data? Seeds are preferentially launched (a) at angles that maximize the height they travel above the plant; (b) at angles below the horizontal in order to drive the seeds into the ground with more force; (c) at angles that maximize the horizontal distance the seeds travel from the plant; (d) at angles that minimize the time the seeds spend exposed to the air.

## ANSWERS

### Chapter Opening Question ?

(iii) A cyclist going around a curve at constant speed has an acceleration directed toward the inside of the curve (see Section 3.2, especially Fig. 3.12a).

### Key Example VARIATION Problems

**VP3.9.1** (a) 1.53 s, 11.5 m (b) 3.06 s, 61.2 m

**VP3.9.2** (a) 20.6 m/s (b) 5.40 m

**VP3.9.3** (a) 3.51 s (b) 33.8 m (c)  $v_x = 9.64$  m/s,  $v_y = -22.9$  m/s

**VP3.9.4** (a)  $t = 2v_0/g$ ,  $x = 2v_0^2/g$ ,  $y = -2v_0^2/g$  (b)  $t = v_0/g$ ,  $x = v_0^2/g$ ,  $y = -v_0^2/2g$

**VP3.12.1** 20.0 m

**VP3.12.2** (a) 41.6 s (b) 6.04 m/s<sup>2</sup>

**VP3.12.3** (a)  $P$ : 0.938 m/s,  $Q$ : 1.88 m/s (b)  $P$ : 8.79 m/s<sup>2</sup>,  $Q$ : 17.6 m/s<sup>2</sup> (c) increase, increase

**VP3.12.4** (a) Venus:  $3.49 \times 10^4$  m/s, Earth:  $2.99 \times 10^4$  m/s, Mars:  $2.41 \times 10^4$  m/s (b) Venus:  $1.13 \times 10^{-2}$  m/s<sup>2</sup>, Earth:  $5.95 \times 10^{-3}$  m/s<sup>2</sup>, Mars:  $2.55 \times 10^{-3}$  m/s<sup>2</sup> (c) decrease, decrease

**VP3.12.5** (a)  $T_A/T_B = 4$  (b)  $a_{\text{rad},A}/a_{\text{rad},B} = 1/8$

**VP3.15.1** (a) +53.0 m/s (b) -53.0 m/s

**VP3.15.2** (a) 90.0 m/s eastward (b) 90.0 m/s westward (c) neither

**VP3.15.3** (a) 25.6 m/s,  $51.3^\circ$  north of east (b) 25.6 m/s,  $51.3^\circ$  south of west

**VP3.15.4** 130 m/s,  $12.6^\circ$  west of north

### Bridging Problem

$$(a) R = \frac{2v_0^2 \cos(\theta + \phi) \sin \phi}{g \cos^2 \theta} \quad (b) \phi = 45^\circ - \frac{\theta}{2}$$

? Under what circumstances does the barbell push on the weightlifter just as hard as she pushes on the barbell? (i) When she holds the barbell stationary; (ii) when she raises the barbell; (iii) when she lowers the barbell; (iv) two of (i), (ii), and (iii); (v) all of (i), (ii), and (iii); (vi) none of these.



# 4 Newton's Laws of Motion

## LEARNING OUTCOMES

*In this chapter, you'll learn...*

- 4.1 What the concept of force means in physics, why forces are vectors, and the significance of the net force on an object.
- 4.2 What happens when the net external force on an object is zero, and the significance of inertial frames of reference.
- 4.3 How the acceleration of an object is determined by the net external force on the object and the object's mass.
- 4.4 The difference between the mass of an object and its weight.
- 4.5 How the forces that two objects exert on each other are related.
- 4.6 How to use a free-body diagram to help analyze the forces on an object.

*You'll need to review...*

- 1.7 Vectors and vector addition.
- 1.8 Vector components.
- 2.4 Straight-line motion with constant acceleration.
- 2.5 The motion of freely falling objects.
- 3.2 Acceleration as a vector.
- 3.4 Uniform circular motion.
- 3.5 Relative velocity.

We've seen in the last two chapters how to use *kinematics* to describe motion in one, two, or three dimensions. But what *causes* objects to move the way that they do? For example, why does a dropped feather fall more slowly than a dropped bowling ball? Why do you feel pushed backward in a car that accelerates forward? The answers to such questions take us into the subject of **dynamics**, the relationship of motion to the forces that cause it.

The principles of dynamics were clearly stated for the first time by Sir Isaac Newton (1642–1727); today we call them **Newton's laws of motion**. Newton did not *derive* the laws of motion, but rather *deduced* them from a multitude of experiments performed by other scientists, especially Galileo Galilei (who died the year Newton was born). Newton's laws are the foundation of **classical mechanics** (also called **Newtonian mechanics**); using them, we can understand most familiar kinds of motion. Newton's laws need modification only for situations involving extremely high speeds (near the speed of light) or very small sizes (such as within the atom).

Newton's laws are very simple to state, yet many students find these laws difficult to grasp and to work with. The reason is that before studying physics, you've spent years walking, throwing balls, pushing boxes, and doing dozens of things that involve motion. Along the way, you've developed a set of "common sense" ideas about motion and its causes. But many of these "common sense" ideas don't stand up to logical analysis. A big part of the job of this chapter—and of the rest of our study of physics—is helping you recognize how "common sense" ideas can sometimes lead you astray, and how to adjust your understanding of the physical world to make it consistent with what experiments tell us.

## 4.1 FORCE AND INTERACTIONS

A **force** is a push or a pull. More precisely, a force is an *interaction* between two objects or between an object and its environment (**Fig. 4.1**). That's why we always refer to the force that one object *exerts* on a second object. When you push on a car that is stuck in the snow, you exert a force on the car; a steel cable exerts a force on the beam it is hoisting at a construction site; and so on. As Fig. 4.1 shows, force is a *vector* quantity; you can push or pull an object in different directions.

When a force involves direct contact between two objects, such as a push or pull that you exert on an object with your hand, we call it a **contact force**. **Figures 4.2a, 4.2b, and 4.2c** show three common types of contact forces. The **normal force** (Fig. 4.2a) is exerted on an object by any surface with which it is in contact. The adjective “normal” means that the force always acts *perpendicular* to the surface of contact, no matter what the angle of that surface. By contrast, the **friction force** (Fig. 4.2b) exerted on an object by a surface acts *parallel* to the surface, in the direction that opposes sliding. The pulling force exerted by a stretched rope or cord on an object to which it's attached is called a **tension force** (Fig. 4.2c). When you tug on your dog's leash, the force that pulls on her collar is a tension force.

In addition to contact forces, there are **long-range forces** that act even when the objects are separated by empty space. The force between two magnets is an example of a long-range force, as is the force of gravity (Fig. 4.2d); the earth pulls a dropped object toward it even though there is no direct contact between the object and the earth. The gravitational force that the earth exerts on your body is called your **weight**.

To describe a force vector  $\vec{F}$ , we need to describe the *direction* in which it acts as well as its *magnitude*, the quantity that describes “how much” or “how hard” the force pushes or pulls. The SI unit of the magnitude of force is the *newton*, abbreviated N. (We'll give a precise definition of the newton in Section 4.3.) **Table 4.1** lists some typical force magnitudes.

A common instrument for measuring force magnitudes is the *spring balance*. It consists of a coil spring enclosed in a case with a pointer attached to one end. When forces are applied to the ends of the spring, it stretches by an amount that depends on the force. We can make a scale for the pointer by using a number of identical objects with weights of exactly 1 N each. When one, two, or more of these are suspended simultaneously from the balance, the total force stretching the spring is 1 N, 2 N, and so on, and we can label the corresponding positions of the pointer 1 N, 2 N, and so on. Then we can use this instrument to measure the magnitude of an unknown force. We can also make a similar instrument that measures pushes instead of pulls.

**Figure 4.3** (next page) shows a spring balance being used to measure a pull or push that we apply to a box. In each case we draw a vector to represent the applied force. The length of the vector shows the magnitude; the longer the vector, the greater the force magnitude.

## Superposition of Forces

When you hold a ball in your hand to throw it, at least two forces act on it: the push of your hand and the downward pull of gravity. Experiment shows that when two forces  $\vec{F}_1$  and  $\vec{F}_2$  act at the same time at the same point on an object (**Fig. 4.4**, next page), the effect on the object's motion is the same as if a single force  $\vec{R}$  were acting equal to the vector sum, or resultant, of the original forces:  $\vec{R} = \vec{F}_1 + \vec{F}_2$ . More generally, *any number of*

Figure 4.1 Some properties of forces.

- A force is a push or a pull.
- A force is an interaction between two objects or between an object and its environment.
- A force is a vector quantity, with magnitude and direction.



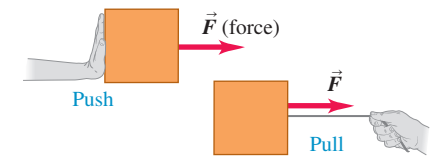


Figure 4.2 Four common types of forces.


(a) **Normal force  $\vec{n}$** : When an object rests or pushes on a surface, the surface exerts a push on it that is directed perpendicular to the surface.

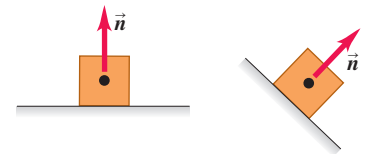

(b) **Friction force  $\vec{f}$** : In addition to the normal force, a surface may exert a friction force on an object, directed parallel to the surface.



(c) **Tension force  $\vec{T}$** : A pulling force exerted on an object by a rope, cord, etc.



(d) **Weight  $\vec{w}$** : The pull of gravity on an object is a long-range force (a force that acts over a distance).



**TABLE 4.1** Typical Force Magnitudes

Sun's gravitational force on the earth	$3.5 \times 10^{22}$ N
Weight of a large blue whale	$1.9 \times 10^6$ N
Maximum pulling force of a locomotive	$8.9 \times 10^5$ N
Average weight of a sumo wrestler	$1.45 \times 10^3$ N
Weight of a medium apple	1 N
Weight of the smallest insect eggs	$2 \times 10^{-6}$ N
Electric attraction between the proton and the electron in a hydrogen atom	$8.2 \times 10^{-8}$ N
Weight of a very small bacterium	$1 \times 10^{-18}$ N
Weight of a hydrogen atom	$1.6 \times 10^{-26}$ N
Weight of an electron	$8.9 \times 10^{-30}$ N
Gravitational attraction between the proton and the electron in a hydrogen atom	$3.6 \times 10^{-47}$ N

Figure 4.4 Superposition of forces.

Two forces  $\vec{F}_1$  and  $\vec{F}_2$  acting on an object at point  $O$  have the same effect as a single force  $\vec{R}$  equal to their vector sum.


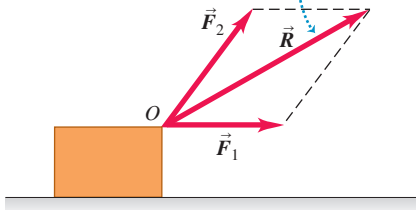



Figure 4.5  $F_x$  and  $F_y$  are the components of  $\vec{F}$  parallel and perpendicular to the sloping surface of the inclined plane.

We cross out a vector when we replace it by its components.



The  $x$ - and  $y$ -axes can have any orientation, just so they're mutually perpendicular.

Figure 4.3 Using a vector arrow to denote the force that we exert when (a) pulling a block with a string or (b) pushing a block with a stick.

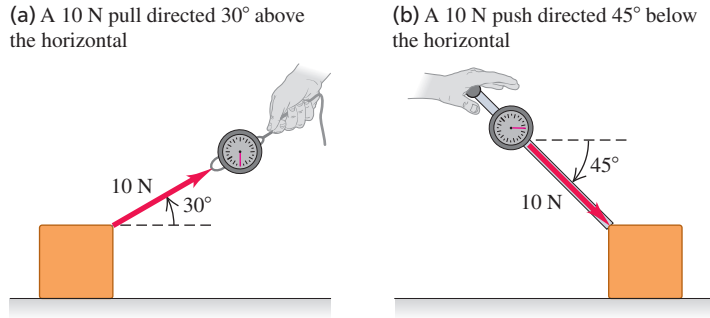

forces applied at a point on an object have the same effect as a single force equal to the vector sum of the forces. This important principle is called **superposition of forces**.

Since forces are vector quantities and add like vectors, we can use all of the rules of vector mathematics that we learned in Chapter 1 to solve problems that involve vectors. This would be a good time to review the rules for vector addition presented in Sections 1.7 and 1.8.

We learned in Section 1.8 that it's easiest to add vectors by using components. That's why we often describe a force  $\vec{F}$  in terms of its  $x$ - and  $y$ -components  $F_x$  and  $F_y$ . Note that the  $x$ - and  $y$ -coordinate axes do *not* have to be horizontal and vertical, respectively. As an example, **Fig. 4.5** shows a crate being pulled up a ramp by a force  $\vec{F}$ . In this situation it's most convenient to choose one axis to be parallel to the ramp and the other to be perpendicular to the ramp. For the case shown in Fig. 4.5, both  $F_x$  and  $F_y$  are positive; in other situations, depending on your choice of axes and the orientation of the force  $\vec{F}$ , either  $F_x$  or  $F_y$  may be negative or zero.

**CAUTION Using a wiggly line in force diagrams** In Fig. 4.5 we draw a wiggly line through the force vector  $\vec{F}$  to show that we have replaced it by its  $x$ - and  $y$ -components. Otherwise, the diagram would include the same force twice. We'll draw such a wiggly line in any force diagram where a force is replaced by its components. We encourage you to do the same in your own diagrams! ■


We'll often need to find the vector sum (resultant) of *all* forces acting on an object. We call this the **net force** acting on the object. We'll use the Greek letter  $\Sigma$  (capital sigma, equivalent to the Roman  $S$ ) as a shorthand notation for a sum. If the forces are labeled  $\vec{F}_1$ ,  $\vec{F}_2$ ,  $\vec{F}_3$ , and so on, we can write

$$\text{The net force acting on an object ... } \vec{R} = \Sigma \vec{F} = \vec{F}_1 + \vec{F}_2 + \vec{F}_3 + \dots \quad (4.1)$$

... is the vector sum, or resultant, of all individual forces acting on that object.

Figure 4.6 Finding the components of the vector sum (resultant)  $\vec{R}$  of two forces  $\vec{F}_1$  and  $\vec{F}_2$ .

The  $y$ -component of  $\vec{R}$  equals the sum of the  $y$ -components of  $\vec{F}_1$  and  $\vec{F}_2$ . The same is true for the  $x$ -components.

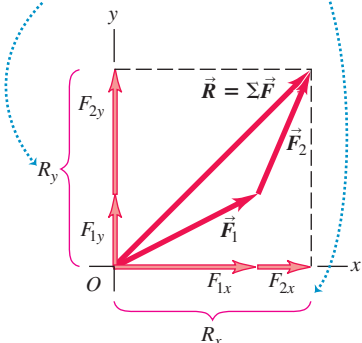

We read  $\Sigma \vec{F}$  as “the vector sum of the forces” or “the net force.” The  $x$ -component of the net force is the sum of the  $x$ -components of the individual forces, and likewise for the  $y$ -component (**Fig. 4.6**):

$$R_x = \Sigma F_x \quad R_y = \Sigma F_y \quad (4.2)$$

Each component may be positive or negative, so be careful with signs when you evaluate these sums.

Once we have  $R_x$  and  $R_y$  we can find the magnitude and direction of the net force  $\vec{R} = \Sigma \vec{F}$  acting on the object. The magnitude is

$$R = \sqrt{R_x^2 + R_y^2}$$

and the angle  $\theta$  between  $\vec{R}$  and the  $+x$ -axis can be found from the relationship  $\tan \theta = R_y/R_x$ . The components  $R_x$  and  $R_y$  may be positive, negative, or zero, and the angle  $\theta$  may be in any of the four quadrants.

In three-dimensional problems, forces may also have  $z$ -components; then we add the equation  $R_z = \sum F_z$  to Eqs. (4.2). The magnitude of the net force is then

$$R = \sqrt{R_x^2 + R_y^2 + R_z^2}$$

### EXAMPLE 4.1 Superposition of forces: Finding the net force

WITH **VARIATION** PROBLEMS

Three professional wrestlers are fighting over a champion's belt. **Figure 4.7a** shows the horizontal force each wrestler applies to the belt, as viewed from above. The forces have magnitudes  $F_1 = 50$  N,  $F_2 = 120$  N, and  $F_3 = 250$  N. Find the  $x$ - and  $y$ -components of the net force on the belt, and find its magnitude and direction.

**IDENTIFY and SET UP** This is a problem in vector addition in which the vectors happen to represent forces. To find the  $x$ - and  $y$ -components of the net force  $\vec{R}$ , we'll use the component method of vector addition expressed by Eqs. (4.2). Once we know the components of  $\vec{R}$ , we can find its magnitude and direction.

**EXECUTE** Figure 4.7a shows that force  $\vec{F}_1$  (magnitude 50 N) points in the positive  $x$ -direction. Hence it has a positive  $x$ -component and zero  $y$ -component:

$$F_{1x} = 50 \text{ N} \quad F_{1y} = 0 \text{ N}$$

Force  $\vec{F}_2$  points in the negative  $y$ -direction and so has zero  $x$ -component and a negative  $y$ -component:

$$F_{2x} = 0 \text{ N} \quad F_{2y} = -120 \text{ N}$$

Force  $\vec{F}_3$  doesn't point along either the  $x$ -direction or the  $y$ -direction: Figure 4.7a shows that its  $x$ -component is negative and its  $y$ -component

is positive. The angle between  $\vec{F}_3$  and the negative  $x$ -axis is  $53^\circ$ , so the absolute value of its  $x$ -component is equal to the magnitude of  $\vec{F}_3$  times the cosine of  $53^\circ$ . The absolute value of the  $y$ -component is therefore the magnitude of  $\vec{F}_3$  times the sine of  $53^\circ$ . Keeping track of the signs, we find the components of  $\vec{F}_3$  are

$$F_{3x} = -(250 \text{ N}) \cos 53^\circ = -150 \text{ N} \quad F_{3y} = (250 \text{ N}) \sin 53^\circ = 200 \text{ N}$$

From Eqs. (4.2) the components of the net force  $\vec{R} = \sum \vec{F}$  are

$$R_x = F_{1x} + F_{2x} + F_{3x} = 50 \text{ N} + 0 \text{ N} + (-150 \text{ N}) = -100 \text{ N}$$

$$R_y = F_{1y} + F_{2y} + F_{3y} = 0 \text{ N} + (-120 \text{ N}) + 200 \text{ N} = 80 \text{ N}$$

The net force has a negative  $x$ -component and a positive  $y$ -component, as Fig. 4.7b shows.

The magnitude of  $\vec{R}$  is

$$R = \sqrt{R_x^2 + R_y^2} = \sqrt{(-100 \text{ N})^2 + (80 \text{ N})^2} = 128 \text{ N}$$

To find the angle between the net force and the  $+x$ -axis, we use Eq. (1.7):

$$\theta = \arctan \frac{R_y}{R_x} = \arctan \left( \frac{80 \text{ N}}{-100 \text{ N}} \right) = \arctan(-0.80)$$


The arctangent of  $-0.80$  is  $-39^\circ$ , but Fig. 4.7b shows that the net force lies in the second quadrant. Hence the correct solution is  $\theta = -39^\circ + 180^\circ = 141^\circ$ .

**EVALUATE** The net force is *not* zero. Wrestler 3 exerts the greatest force on the belt,  $F_3 = 250$  N, and will walk away with it when the struggle ends.

You should check the direction of  $\vec{R}$  by adding the vectors  $\vec{F}_1$ ,  $\vec{F}_2$ , and  $\vec{F}_3$  graphically. Does your drawing show that  $\vec{R} = \vec{F}_1 + \vec{F}_2 + \vec{F}_3$  points in the second quadrant as we found?

**KEYCONCEPT** The net force is the vector sum of all of the individual forces that act on the object. It can be specified by its components or by its magnitude and direction.

Figure 4.7 (a) Three forces acting on a belt. (b) The net force  $\vec{R} = \sum \vec{F}$  and its components.

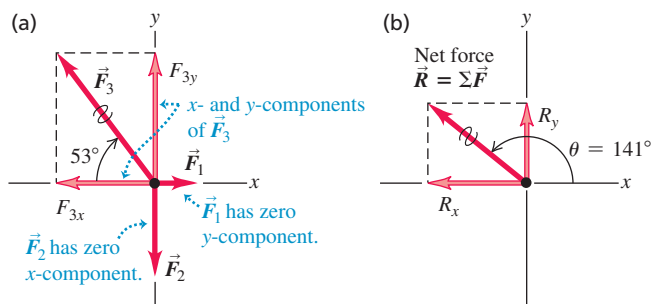

**TEST YOUR UNDERSTANDING OF SECTION 4.1** Figure 4.5 shows a force  $\vec{F}$  acting on a crate. (a) With the  $x$ - and  $y$ -axes shown in the figure, is the  $x$ -component of the gravitational force that the earth exerts on the crate (the crate's weight) positive, negative, or zero? (b) What about the  $y$ -component?


**ANSWER** (a) negative. (b) negative. The gravitational force on the crate points straight downward. In Fig. 4.5 the  $x$ -axis points up and to the right, and the  $y$ -axis points up and to the left. With this choice of axes, the gravitational force has both an  $x$ -component and a  $y$ -component, and both are negative.

## 4.2 NEWTON'S FIRST LAW


How do the forces acting on an object affect that object's motion? Let's first note that it's impossible for an object to affect its own motion by exerting a force on itself. If that were possible, you could lift yourself to the ceiling by pulling up on your belt! The forces that affect an object's motion are **external forces**, those forces exerted on the object by other

Figure 4.8 The slicker the surface, the farther a puck slides after being given an initial velocity. On an air-hockey table (c) the friction force is practically zero, so the puck continues with almost constant velocity.


(a) Table: puck stops short.



(b) Ice: puck slides farther.



(c) Air-hockey table: puck slides even farther.



objects in its environment. So the question we must answer is this: How do the external forces that act on an object affect its motion?

To begin to answer this question, let's first consider what happens when the net external force on an object is *zero*. You would almost certainly agree that if an object is at rest, and if no net external force acts on it (that is, no net push or pull from other objects), that object will remain at rest. But what if there is zero net external force acting on an object *in motion*?

To see what happens in this case, suppose you slide a hockey puck along a horizontal tabletop, applying a horizontal force to it with your hand (Fig. 4.8a). After you stop pushing, the puck does *not* continue to move indefinitely; it slows down and stops. To keep it moving, you have to keep pushing (that is, applying a force). You might come to the “common sense” conclusion that objects in motion naturally come to rest and that a force is required to sustain motion.

But now imagine pushing the puck across a smooth surface of ice (Fig. 4.8b). After you quit pushing, the puck will slide a lot farther before it stops. Put it on an air-hockey table, where it floats on a thin cushion of air, and it moves still farther (Fig. 4.8c). In each case, what slows the puck down is *friction*, an interaction between the lower surface of the puck and the surface on which it slides. Each surface exerts a friction force on the puck that resists the puck's motion; the difference in the three cases is the magnitude of the friction force. The ice exerts less friction than the tabletop, so the puck travels farther. The gas molecules of the air-hockey table exert the least friction of all. If we could eliminate friction completely, the puck would never slow down, and we would need no force at all to keep the puck moving once it had been started. Thus the “common sense” idea that a force is required to sustain motion is *incorrect*.

Experiments like the ones we've just described show that when *no* net external force acts on an object, the object either remains at rest *or* moves with constant velocity in a straight line. Once an object has been set in motion, no net external force is needed to keep it moving. We call this observation *Newton's first law of motion*:


**NEWTON'S FIRST LAW OF MOTION** An object acted on by no net external force has a constant velocity (which may be zero) and zero acceleration.

The tendency of an object to keep moving once it is set in motion is called **inertia**. You use inertia when you try to get ketchup out of a bottle by shaking it. First you start the bottle (and the ketchup inside) moving forward; when you jerk the bottle back, the ketchup tends to keep moving forward and, you hope, ends up on your burger. Inertia is also the tendency of an object at rest to remain at rest. You may have seen a tablecloth yanked out from under a table setting without breaking anything. The force on the table setting isn't great enough to make it move appreciably during the short time it takes to pull the tablecloth away.


It's important to note that the *net* external force is what matters in Newton's first law. For example, a physics book at rest on a horizontal tabletop has two forces acting on it: an upward supporting force, or normal force, exerted by the tabletop (see Fig. 4.2a) and the downward force of the earth's gravity (see Fig. 4.2d). The upward push of the surface is just as great as the downward pull of gravity, so the *net* external force acting on the book (that is, the vector sum of the two forces) is zero. In agreement with Newton's first law, if the book is at rest on the tabletop, it remains at rest. The same principle applies to a hockey puck sliding on a horizontal, frictionless surface: The vector sum of the upward push of the surface and the downward pull of gravity is zero. Once the puck is in motion, it continues to move with constant velocity because the *net* external force acting on it is zero.

Here's another example. Suppose a hockey puck rests on a horizontal surface with negligible friction, such as an air-hockey table or a slab of wet ice. If the puck is initially at rest and a single horizontal force  $\vec{F}_1$  acts on it (Fig. 4.9a), the puck starts to move. If the puck is in motion to begin with, the force changes its speed, its direction, or both, depending on the direction of the force. In this case the net external force is equal to  $\vec{F}_1$ , which is *not* zero. (There are also two vertical forces: the earth's gravitational attraction and the upward normal force exerted by the surface. But as we mentioned earlier, these two forces cancel.)

(a) A puck on a frictionless surface accelerates when acted on by a single horizontal force.



(b) This puck is acted on by two horizontal forces whose vector sum is zero. The puck behaves as though no external forces act on it.



Now suppose we apply a second force,  $\vec{F}_2$  (Fig. 4.9b), equal in magnitude to  $\vec{F}_1$  but opposite in direction. The two forces are negatives of each other,  $\vec{F}_2 = -\vec{F}_1$ , and their vector sum is zero:

$$\Sigma \vec{F} = \vec{F}_1 + \vec{F}_2 = \vec{F}_1 + (-\vec{F}_1) = \mathbf{0}$$

Again, we find that if the object is at rest at the start, it remains at rest; if it is initially moving, it continues to move in the same direction with constant speed. These results show that in Newton's first law, *zero net external force is equivalent to no external force at all*. This is just the principle of superposition of forces that we saw in Section 4.1.

When an object is either at rest or moving with constant velocity (in a straight line with constant speed), we say that the object is in **equilibrium**. For an object to be in equilibrium, it must be acted on by no forces, or by several forces such that their vector sum—that is, the net external force—is zero:

**Newton's first law:** Net external force on an object ...  $\rightarrow \Sigma \vec{F} = \mathbf{0} \leftarrow$  ... must be zero if the object is in **equilibrium**. (4.3)

We're assuming that the object can be represented adequately as a point particle. When the object has finite size, we also have to consider *where* on the object the forces are applied. We'll return to this point in Chapter 11.

### CONCEPTUAL EXAMPLE 4.2 Using Newton's first law I

In the classic 1950 science-fiction film *Rocketship X-M*, a spaceship is moving in the vacuum of outer space, far from any star or planet, when its engine dies. As a result, the spaceship slows down and stops. What does Newton's first law say about this scene?

**SOLUTION** No external forces act on the spaceship after the engine dies, so according to Newton's first law it will *not* stop but will continue

to move in a straight line with constant speed. Some science-fiction movies are based on accurate science; this is not one of them.

**KEYCONCEPT** If the net external force on an object is zero, the object either remains at rest or keeps moving at a constant velocity.

### CONCEPTUAL EXAMPLE 4.3 Using Newton's first law II

You are driving a Porsche 918 Spyder on a straight testing track at a constant speed of 250 km/h. You pass a 1971 Volkswagen Beetle doing a constant 75 km/h. On which car is the net external force greater?

**SOLUTION** The key word in this question is “net.” Both cars are in equilibrium because their velocities are constant; Newton's first law therefore says that the *net* external force on each car is *zero*.

This seems to contradict the “common sense” idea that the faster car must have a greater force pushing it. Thanks to your Porsche's high-power engine, it's true that the track exerts a greater forward force on

your Porsche than it does on the Volkswagen. But a *backward* force also acts on each car due to road friction and air resistance. When the car is traveling with constant velocity, the vector sum of the forward and backward forces is zero. There is a greater backward force on the fast-moving Porsche than on the slow-moving Volkswagen, which is why the Porsche's engine must be more powerful than that of the Volkswagen.

**KEYCONCEPT** If an object either remains at rest or keeps moving at a constant velocity, the net external force on the object is zero.

Figure 4.9 (a) A hockey puck accelerates in the direction of a net applied force  $\vec{F}_1$ . (b) When the net external force is zero, the acceleration is zero, and the puck is in equilibrium.

### APPLICATION Sledding with

**Newton's First Law** The downward force of gravity acting on the child and sled is balanced by an upward normal force exerted by the ground. The adult's foot exerts a forward force that balances the backward force of friction on the sled. Hence there is no net external force on the child and sled, and they slide with a constant velocity.



## Inertial Frames of Reference


In discussing relative velocity in Section 3.5, we introduced the concept of *frame of reference*. This concept is central to Newton's laws of motion. Suppose you are in a bus that is traveling on a straight road and speeding up. If you could stand in the aisle on roller skates, you would start moving *backward* relative to the bus as the bus gains speed. If instead the bus was slowing to a stop, you would start moving *forward* down the aisle. In either case, it looks as though Newton's first law is not obeyed; there is no net external force acting on you, yet your velocity changes. What's wrong?

The point is that the bus is accelerating with respect to the earth and is *not* a suitable frame of reference for Newton's first law. This law is valid in some frames of reference and not valid in others. A frame of reference in which Newton's first law *is* valid is called an **inertial frame of reference**. The earth is at least approximately an inertial frame of reference, but the bus is not. (The earth is not a completely inertial frame, owing to the acceleration associated with its rotation and its motion around the sun. These effects are quite small, however; see Exercises 3.25 and 3.34.) Because Newton's first law is used to define what we mean by an inertial frame of reference, it is sometimes called the *law of inertia*.

**Figure 4.10** helps us understand what you experience when riding in a vehicle that's accelerating. In Fig. 4.10a, a vehicle is initially at rest and then begins to accelerate to the right. A passenger standing on roller skates (which nearly eliminate the effects of friction) has virtually no net external force acting on her, so she tends to remain at rest relative to the inertial frame of the earth. As the vehicle accelerates around her, she moves backward relative to the vehicle. In the same way, a passenger in a vehicle that is slowing down tends to continue moving with constant velocity relative to the earth, and so moves forward relative to the vehicle (Fig. 4.10b). A vehicle is also accelerating if it moves at a constant speed but is turning (Fig. 4.10c). In this case a passenger tends to continue moving relative to the earth at constant speed in a straight line; relative to the vehicle, the passenger moves to the side of the vehicle on the outside of the turn.

In each case shown in Fig. 4.10, an observer in the vehicle's frame of reference might be tempted to conclude that there *is* a net external force acting on the passenger, since the passenger's velocity *relative to the vehicle* changes in each case. This conclusion is simply

Figure 4.10 Riding in an accelerating vehicle.

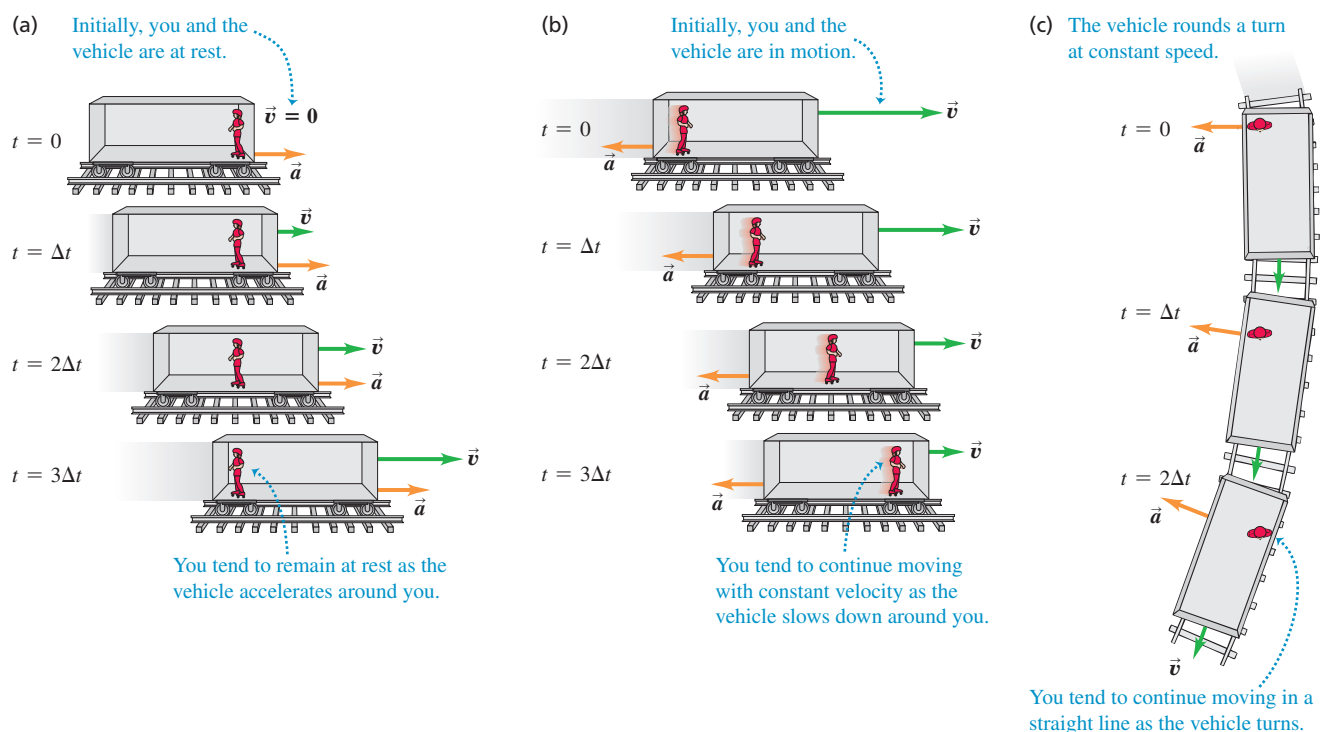



wrong; the net external force on the passenger is indeed zero. The vehicle observer's mistake is in trying to apply Newton's first law in the vehicle's frame of reference, which is *not* an inertial frame and in which Newton's first law isn't valid (**Fig. 4.11**). In this book we'll use *only* inertial frames of reference.

We've mentioned only one (approximately) inertial frame of reference: the earth's surface. But there are many inertial frames. If we have an inertial frame of reference  $A$ , in which Newton's first law is obeyed, then *any* second frame of reference  $B$  will also be inertial if it moves relative to  $A$  with constant velocity  $\vec{v}_{B/A}$ . We can prove this by using the relative-velocity relationship Eq. (3.35) from Section 3.5:

$$\vec{v}_{P/A} = \vec{v}_{P/B} + \vec{v}_{B/A}$$

Suppose that  $P$  is an object that moves with constant velocity  $\vec{v}_{P/A}$  with respect to an inertial frame  $A$ . By Newton's first law the net external force on this object is zero. The velocity of  $P$  relative to another frame  $B$  has a different value,  $\vec{v}_{P/B} = \vec{v}_{P/A} - \vec{v}_{B/A}$ . But if the relative velocity  $\vec{v}_{B/A}$  of the two frames is constant, then  $\vec{v}_{P/B}$  is constant as well. Thus  $B$  is also an inertial frame; the velocity of  $P$  in this frame is constant, and the net external force on  $P$  is zero, so Newton's first law is obeyed in  $B$ . Observers in frames  $A$  and  $B$  will disagree about the velocity of  $P$ , but they will agree that  $P$  has a constant velocity (zero acceleration) and has zero net external force acting on it.

There is no single inertial frame of reference that is preferred over all others for formulating Newton's laws. If one frame is inertial, then every other frame moving relative to it with constant velocity is also inertial. Viewed in this light, the state of rest and the state of motion with constant velocity are not very different; both occur when the vector sum of forces acting on the object is zero.

**TEST YOUR UNDERSTANDING OF SECTION 4.2** In which of the following situations is there zero net external force on the object? (i) An airplane flying due north at a steady 120 m/s and at a constant altitude; (ii) a car driving straight up a hill with a  $3^\circ$  slope at a constant 90 km/h; (iii) a hawk circling at a constant 20 km/h at a constant height of 15 m above an open field; (iv) a box with slick, frictionless surfaces in the back of a truck as the truck accelerates forward on a level road at  $5 \text{ m/s}^2$ .

**ANSWER** In (i), (ii), and (iv) the object is not accelerating, so the net external force on the object is zero. [In (iv), if the truck starts from rest, the box remains stationary as seen in the reference frame of the ground as the truck accelerates forward, like the person on skates in Fig. 4.10a.] In (iii), the hawk is moving in a circle; hence it is accelerating and is *not* in equilibrium.

### 4.3 NEWTON'S SECOND LAW

Newton's first law tells us that when an object is acted on by zero net external force, the object moves with constant velocity and zero acceleration. In **Fig. 4.12a** (next page), a hockey puck is sliding to the right on wet ice. There is negligible friction, so there are no horizontal forces acting on the puck; the downward force of gravity and the upward normal force exerted by the ice surface sum to zero. So the net external force  $\sum \vec{F}$  acting on the puck is zero, the puck has zero acceleration, and its velocity is constant.

But what happens when the net external force is *not* zero? In Fig. 4.12b we apply a constant horizontal force to a sliding puck in the same direction that the puck is moving. Then  $\sum \vec{F}$  is constant and in the same horizontal direction as  $\vec{v}$ . We find that during the time the force is acting, the velocity of the puck changes at a constant rate; that is, the puck moves with constant acceleration. The speed of the puck increases, so the acceleration  $\vec{a}$  is in the same direction as  $\vec{v}$  and  $\sum \vec{F}$ .

In Fig. 4.12c we reverse the direction of the force on the puck so that  $\sum \vec{F}$  acts opposite to  $\vec{v}$ . In this case as well, the puck has an acceleration; the puck moves more and more slowly to the right. The acceleration  $\vec{a}$  in this case is to the left, in the same direction as  $\sum \vec{F}$ . As in the previous case, experiment shows that the acceleration is constant if  $\sum \vec{F}$  is constant.

We conclude that *a net external force acting on an object causes the object to accelerate in the same direction as the net external force*. If the magnitude of the net external force is constant, as in Fig. 4.12b and Fig. 4.12c, then so is the magnitude of the acceleration.

**Figure 4.11** From the frame of reference of the car, it seems as though a force is pushing the crash test dummies forward as the car comes to a sudden stop. But there is really no such force: As the car stops, the dummies keep moving forward as a consequence of Newton's first law.

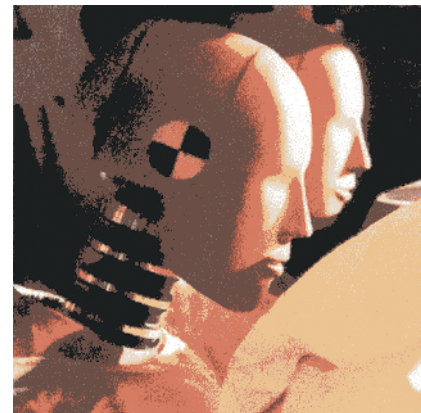


Figure 4.12 Using a hockey puck on a frictionless surface to explore the relationship between the net external force  $\Sigma \vec{F}$  on an object and the resulting acceleration  $\vec{a}$  of the object.

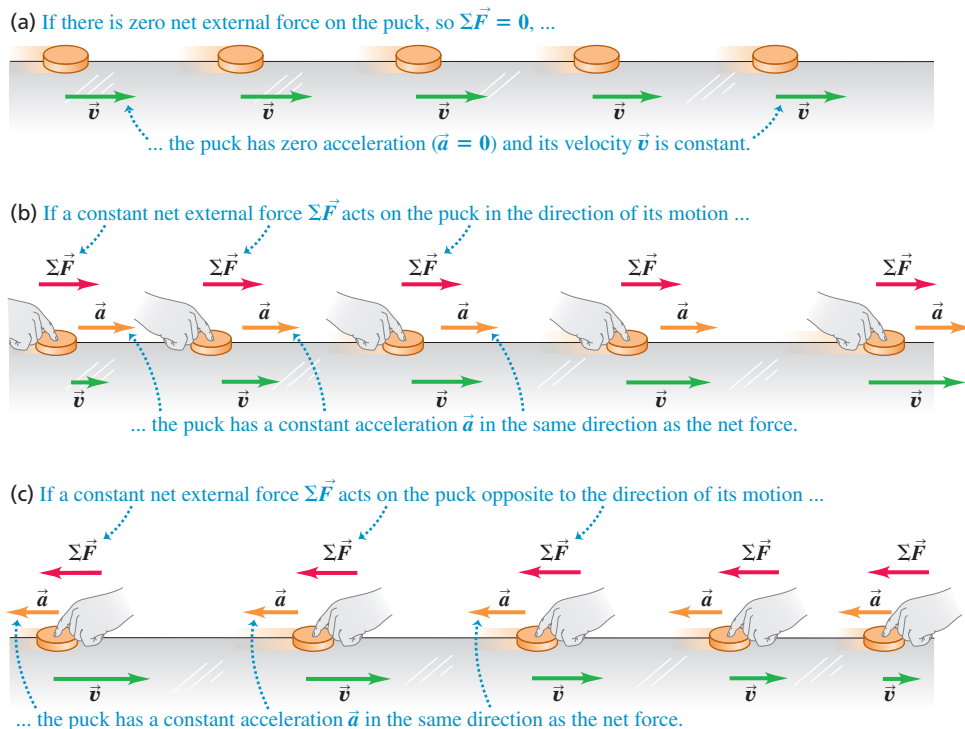


Figure 4.13 A top view of a hockey puck in uniform circular motion on a frictionless horizontal surface.


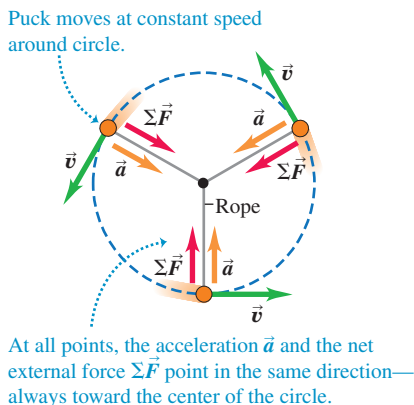


Figure 4.14 The magnitude of an object's acceleration  $\vec{a}$  is directly proportional to the magnitude of the net external force  $\Sigma \vec{F}$  acting on the object of mass  $m$ .

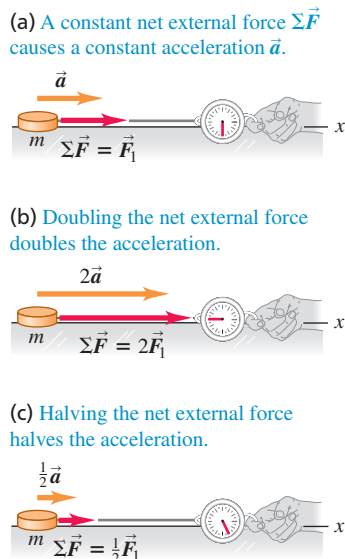

These conclusions about net external force and acceleration also apply to an object moving along a curved path. For example, **Fig. 4.13** shows a hockey puck moving in a horizontal circle on an ice surface of negligible friction. A rope is attached to the puck and to a stick in the ice, and this rope exerts an inward tension force of constant magnitude on the puck. The net external force and acceleration are both constant in magnitude and directed toward the center of the circle. The speed of the puck is constant, so this is uniform circular motion (see Section 3.4).

**Figure 4.14a** shows another experiment involving acceleration and net external force. We apply a constant horizontal force to a puck on a frictionless horizontal surface, using the spring balance described in Section 4.1 with the spring stretched a constant amount. As in Figs. 4.12b and Figs. 4.12c, this horizontal force equals the net external force on the puck. If we change the magnitude of the net external force, the acceleration changes in the same proportion. Doubling the net external force doubles the acceleration (Fig. 4.14b), halving the net external force halves the acceleration (Fig. 4.14c), and so on. Many such experiments show that *for any given object, the magnitude of the acceleration is directly proportional to the magnitude of the net external force acting on the object.*

### Mass and Force

Our results mean that for a given object, the *ratio* of the magnitude  $|\Sigma \vec{F}|$  of the net external force to the magnitude  $a = |\vec{a}|$  of the acceleration is constant, regardless of the magnitude of the net external force. We call this ratio the *inertial mass*, or simply the **mass**, of the object and denote it by  $m$ . That is,

$$m = \frac{|\Sigma \vec{F}|}{a} \quad \text{or} \quad |\Sigma \vec{F}| = ma \quad \text{or} \quad a = \frac{|\Sigma \vec{F}|}{m} \quad (4.4)$$

Mass is a quantitative measure of inertia, which we discussed in Section 4.2. The last of the equations in Eqs. (4.4) says that the greater an object's mass, the more the object "resists" being accelerated. When you hold a piece of fruit in your hand at the supermarket and move it slightly up and down to estimate its heft, you're applying a force and seeing how much the fruit accelerates up and down in response. If a force causes a large acceleration, the fruit has a small mass; if the same force causes only a small acceleration, the fruit has a large mass. In the same way, if you hit a table-tennis ball and then a basketball with

the same force, the basketball has much smaller acceleration because it has much greater mass.

The SI unit of mass is the **kilogram**. We mentioned in Section 1.3 that the kilogram is officially defined in terms of the definitions of the second and the meter, as well as the value of a fundamental quantity called Planck's constant. We can use this definition:

**One newton is the amount of net external force that gives an acceleration of 1 meter per second squared to an object with a mass of 1 kilogram.**

This definition allows us to calibrate the spring balances and other instruments used to measure forces. Because of the way we have defined the newton, it is related to the units of mass, length, and time. For Eqs. (4.4) to be dimensionally consistent, it must be true that

$$1 \text{ newton} = (1 \text{ kilogram})(1 \text{ meter per second squared})$$

or

$$1 \text{ N} = 1 \text{ kg} \cdot \text{m/s}^2$$

We'll use this relationship many times in the next few chapters, so keep it in mind.

Here's an application of Eqs. (4.4). Suppose we apply a constant net external force  $\Sigma \vec{F}$  to an object of known mass  $m_1$  and we find an acceleration of magnitude  $a_1$  (Fig. 4.15a). We then apply the same force to another object of unknown mass  $m_2$ , and we find an acceleration of magnitude  $a_2$  (Fig. 4.15b). Then, according to Eqs. (4.4),

$$\begin{aligned} m_1 a_1 &= m_2 a_2 \\ \frac{m_2}{m_1} &= \frac{a_1}{a_2} \quad (\text{same net external force}) \end{aligned} \quad (4.5)$$

For the same net external force, the ratio of the masses of two objects is the inverse of the ratio of their accelerations. In principle we could use Eq. (4.5) to measure an unknown mass  $m_2$ , but it is usually easier to determine mass indirectly by measuring the object's weight. We'll return to this point in Section 4.4.

When two objects with masses  $m_1$  and  $m_2$  are fastened together, we find that the mass of the composite object is always  $m_1 + m_2$  (Fig. 4.15c). This additive property of mass may seem obvious, but it has to be verified experimentally. Ultimately, the mass of an object is related to the number of protons, electrons, and neutrons it contains. This wouldn't be a good way to *define* mass because there is no practical way to count these particles. But the concept of mass is the most fundamental way to characterize the quantity of matter in an object.

## Stating Newton's Second Law


Experiment shows that the *net* external force on an object is what causes that object to accelerate. If a combination of forces  $\vec{F}_1$ ,  $\vec{F}_2$ ,  $\vec{F}_3$ , and so on is applied to an object, the object will have the same acceleration vector  $\vec{a}$  as when only a single force is applied, if that single force is equal to the vector sum  $\vec{F}_1 + \vec{F}_2 + \vec{F}_3 + \dots$ . In other words, the principle of superposition of forces (see Fig. 4.4) also holds true when the net external force is not zero and the object is accelerating.

Equations (4.4) relate the magnitude of the net external force on an object to the magnitude of the acceleration that it produces. We have also seen that the direction of the net external force is the same as the direction of the acceleration, whether the object's path is straight or curved. Finally, we've seen that the forces that affect an object's motion are *external* forces, those exerted on the object by other objects in its environment. Newton wrapped up all these results into a single concise statement that we now call *Newton's second law of motion*:

**NEWTON'S SECOND LAW OF MOTION** If a net external force acts on an object, the object accelerates. The direction of acceleration is the same as the direction of the net external force. The mass of the object times the acceleration vector of the object equals the net external force vector.

Figure 4.15 For a given net external force  $\Sigma \vec{F}$  acting on an object, the acceleration is inversely proportional to the mass of the object. Masses add like ordinary scalars.

(a) A known net external force  $\Sigma \vec{F}$  causes an object with mass  $m_1$  to have an acceleration  $\vec{a}_1$ .



(b) Applying the same net external force  $\Sigma \vec{F}$  to a second object and noting the acceleration allow us to measure the mass.



(c) When the two objects are fastened together, the same method shows that their composite mass is the sum of their individual masses.




Figure 4.16 The design of high-performance motorcycles depends fundamentally on Newton's second law. To maximize the forward acceleration, the designer makes the motorcycle as light as possible (that is, minimizes the mass) and uses the most powerful engine possible (thus maximizing the forward force).



In symbols,

**Newton's second law:** If there is a net external force on an object ...  $\Sigma \vec{F} = m\vec{a}$  ... the object accelerates in the same direction as the net external force. (4.6)

Mass of object

An alternative statement is that the acceleration of an object is equal to the net external force acting on the object divided by the object's mass:

$$\vec{a} = \frac{\Sigma \vec{F}}{m}$$

Newton's second law is a fundamental law of nature, the basic relationship between force and motion. Most of the remainder of this chapter and all of the next are devoted to learning how to apply this principle in various situations.

Equation (4.6) has many practical applications (**Fig. 4.16**). You've actually been using it all your life to measure your body's acceleration. In your inner ear, microscopic hair cells are attached to a gelatinous substance that holds tiny crystals of calcium carbonate called *otoliths*. When your body accelerates, the hair cells pull the otoliths along with the rest of your body and sense the magnitude and direction of the force that they exert. By Newton's second law, the acceleration of the otoliths—and hence that of your body as a whole—is proportional to this force and has the same direction. In this way, you can sense the magnitude and direction of your acceleration even with your eyes closed!

### Using Newton's Second Law

At least four aspects of Newton's second law deserve special attention. First, Eq. (4.6) is a *vector* equation. Usually we'll use it in component form, with a separate equation for each component of force and the corresponding component of acceleration:

**Newton's second law:** Each component of the net external force on an object ...

$$\Sigma F_x = ma_x \quad \Sigma F_y = ma_y \quad \Sigma F_z = ma_z \quad (4.7)$$

... equals the object's mass times the corresponding acceleration component.

This set of component equations is equivalent to the single vector Eq. (4.6).

Second, the statement of Newton's second law refers to *external* forces. As an example, how a kicked football moves isn't affected by the *internal* forces that hold the pieces of the ball together. That's why only external forces are included in the sum  $\Sigma \vec{F}$  in Eqs. (4.6) and (4.7).

Third, Eqs. (4.6) and (4.7) are valid only when the mass  $m$  is *constant*. It's easy to think of systems whose masses change, such as a leaking tank truck or a moving railroad car being loaded with coal. Such systems are better handled by using the concept of momentum; we'll get to that in Chapter 8.

Finally, Newton's second law is valid in inertial frames of reference *only*, just like the first law. It's not valid in the reference frame of any of the accelerating vehicles in Fig. 4.10; relative to any of these frames, the passenger accelerates even though the net external force on the passenger is zero. We'll usually treat the earth as an adequate approximation to an inertial frame, although because of its rotation and orbital motion it is not precisely inertial.

**CAUTION**  $m\vec{a}$  is not a force Even though the vector  $m\vec{a}$  is equal to the vector sum  $\Sigma \vec{F}$  of all the forces acting on the object, the vector  $m\vec{a}$  is *not* a force. Acceleration is the *result* of the net external force; it is not a force itself. It's "common sense" to think that a "force of acceleration" pushes you back into your seat when your car accelerates forward from rest. But *there is no such force*; instead, your inertia causes you to tend to stay at rest relative to the earth, and the car accelerates around you (see Fig. 4.10a). The "common sense" confusion arises from trying to apply Newton's second law where it isn't valid—in the noninertial reference frame of an accelerating car. We'll always examine motion relative to *inertial* frames of reference only, and we strongly recommend that you do the same in solving problems. |

In learning how to use Newton's second law, we'll begin in this chapter with examples of straight-line motion. Then in Chapter 5 we'll consider more general kinds of motion and develop more detailed problem-solving strategies.

### EXAMPLE 4.4 Newton's second law I: Determining acceleration from force

WITH **VARIATION** PROBLEMS


A worker applies a constant horizontal force with magnitude 20 N to a box with mass 40 kg resting on a level, freshly waxed floor with negligible friction. What is the acceleration of the box?

**IDENTIFY and SET UP** This problem involves force and acceleration, so we'll use Newton's second law. That means we'll have to find the net external force acting on the box and set it equal to the mass of the box multiplied by its acceleration. In this example, the acceleration is our target variable.

In *any* problem involving forces, to find the *net* external force we must first identify all of the *individual* external forces that act on the object in question. (Remember that the net external force is the vector sum of these individual forces.) To identify these forces, we'll use the idea that two broad categories of forces act on an object like the box in **Fig. 4.17**: the *weight* of the object  $\vec{w}$ —that is, the downward gravitational force exerted by the earth—and *contact forces*, which are forces exerted by other objects that the object in question is touching. Two objects are touching the box—the worker's hands and the floor—and both exert contact forces on the box. The worker's hands exert a horizontal force  $\vec{F}$  of magnitude 20 N. The floor exerts an upward supporting force; as in Section 4.1, we call this a *normal* force  $\vec{n}$  because it acts perpendicular to the surface of contact. (Remember that “normal” is a synonym for “perpendicular.” It does not mean the opposite of “abnormal”!) If friction were present, the floor would also exert a friction force on the box; we'll ignore this here, since we're told that friction is negligible. Figure 4.17 shows these three external forces that act on the box.

Figure 4.17 Our sketch for this problem.

The vertical components of the external forces on the box sum to zero, and the box has no vertical acceleration.

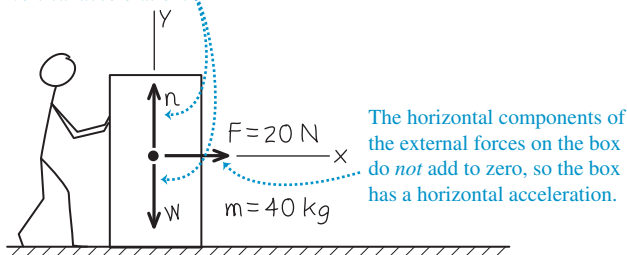

Just as we did for the forces in Example 4.1 (Section 4.1), we'll find the vector sum of these external forces using components. That's why the second step in any problem involving forces is choosing a coordinate system for finding vector components. It's usually convenient to take one axis either along or opposite the direction of the object's acceleration, which in this case is horizontal. Hence we take the  $+x$ -axis to be in the direction of the applied horizontal force (which is the direction in which the box accelerates) and the  $+y$ -axis to be upward. In most force problems that you'll encounter (including this one), the force vectors all lie in a plane, so the  $z$ -axis isn't used.

The box doesn't move vertically, so the  $y$ -acceleration is zero:  $a_y = 0$ . Our target variable is the  $x$ -acceleration,  $a_x$ . We'll find it by using Newton's second law in component form, Eqs. (4.7).

**EXECUTE** The force  $\vec{F}$  exerted by the worker has a positive  $x$ -component and zero  $y$ -component (so  $F_x = F = 20$  N,  $F_y = 0$ ); the normal force  $\vec{n}$  has zero  $x$ -component and an upward, positive  $y$ -component (so  $n_x = 0$ ,  $n_y = n$ ); and the weight  $\vec{w}$  has zero  $x$ -component and a downward, negative  $y$ -component (so  $w_x = 0$ ,  $w_y = -w$ ). From Newton's second law, Eqs. (4.7),

$$\sum F_x = F + 0 + 0 = F = 20 \text{ N} = ma_x$$

$$\sum F_y = 0 + n - w = ma_y = 0$$

From the first equation, the  $x$ -component of acceleration is

$$a_x = \frac{\sum F_x}{m} = \frac{20 \text{ N}}{40 \text{ kg}} = \frac{20 \text{ kg} \cdot \text{m/s}^2}{40 \text{ kg}} = 0.50 \text{ m/s}^2$$

**EVALUATE** The net external force is constant, so the acceleration in the  $+x$ -direction is also constant. If we know the initial position and velocity of the box, we can find its position and velocity at any later time from the constant-acceleration equations of Chapter 2.

To determine  $a_x$ , we didn't need the  $y$ -component of Newton's second law from Eqs. (4.7),  $\sum F_y = ma_y$ . Can you use this equation to show that the magnitude  $n$  of the normal force in this situation is equal to the weight of the box?

**KEYCONCEPT** In problems involving forces and acceleration, first identify all of the external forces acting on an object, then choose a coordinate system. Find the vector sum of the external forces, and then set it equal to the mass of the object times the acceleration.

### EXAMPLE 4.5 Newton's second law II: Determining force from acceleration


WITH **VARIATION** PROBLEMS

A waitress shoves a ketchup bottle with mass 0.45 kg to her right along a smooth, level lunch counter. The bottle leaves her hand moving at 2.0 m/s, then slows down as it slides because of a constant horizontal friction force exerted on it by the countertop. It slides for 1.0 m before coming to rest. What are the magnitude and direction of the friction force acting on the bottle?

**IDENTIFY and SET UP** This problem involves forces and acceleration (the slowing of the ketchup bottle), so we'll use Newton's second law to solve it. As in Example 4.4, we identify the external forces acting on the bottle and choose a coordinate system (**Fig. 4.18**). And as in

Figure 4.18 Our sketch for this problem.

We draw one diagram showing the forces on the bottle and another one showing the bottle's motion.

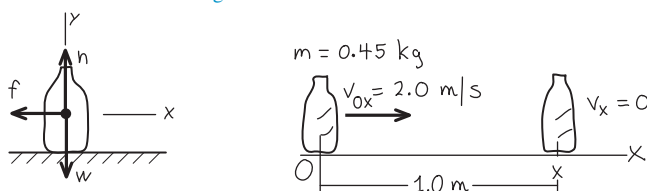

Example 4.4, we have a downward gravitational force  $\vec{w}$  and an upward normal force  $\vec{n}$  exerted by the countertop. The countertop also exerts a friction force  $\vec{f}$ ; this slows the bottle down, so its direction must be opposite the direction of the bottle's velocity (see Fig. 4.12c). We choose the  $+x$ -axis to be in the direction that the bottle slides, and take the origin to be where the bottle leaves the waitress's hand.

Our target variable is the magnitude  $f$  of the friction force. We'll find it by using the  $x$ -component of Newton's second law from Eqs. (4.7). We aren't told the  $x$ -component of the bottle's acceleration,  $a_x$ , but we know that it's constant because the friction force that causes the acceleration is constant. Hence we can use a constant-acceleration formula from Section 2.4 to calculate  $a_x$ . We know the bottle's initial and final  $x$ -coordinates ( $x_0 = 0$  and  $x = 1.0$  m) and its initial and final  $x$ -velocity ( $v_{0x} = 2.0$  m/s and  $v_x = 0$ ), so the easiest equation to use is Eq. (2.13),  $v_x^2 = v_{0x}^2 + 2a_x(x - x_0)$ .

**EXECUTE** We solve Eq. (2.13) for  $a_x$ :

$$a_x = \frac{v_x^2 - v_{0x}^2}{2(x - x_0)} = \frac{(0 \text{ m/s})^2 - (2.0 \text{ m/s})^2}{2(1.0 \text{ m} - 0 \text{ m})} = -2.0 \text{ m/s}^2$$

The negative sign means that the bottle's acceleration is toward the *left* in Fig. 4.18, opposite to its velocity; this makes sense because the bottle is slowing down. As in Example 4.4, neither the normal force nor the weight has an  $x$ -component. That means the net external force in the  $x$ -direction is just the  $x$ -component  $-f$  of the friction force:

$$\begin{aligned} \Sigma F_x &= -f = ma_x = (0.45 \text{ kg})(-2.0 \text{ m/s}^2) \\ &= -0.90 \text{ kg} \cdot \text{m/s}^2 = -0.90 \text{ N} \end{aligned}$$

The negative sign shows that the net external force on the bottle is toward the left. The *magnitude* of the friction force is  $f = 0.90$  N.

**EVALUATE** As a check on the result, try repeating the calculation with the  $+x$ -axis to the *left* in Fig. 4.18. You'll find that  $\Sigma F_x$  is equal to  $+f = +0.90$  N (because the friction force is now in the  $+x$ -direction), and again you'll find  $f = 0.90$  N. The answers for the *magnitudes* of forces don't depend on the choice of coordinate axes!

We didn't write the  $y$ -component of Newton's second law in this example. You should do this and show that it's the same as in Example 4.4, so again the normal force and the weight have the same magnitude.

**CAUTION Normal force and weight don't always have the same magnitude** Be careful that you *never* assume automatically that the normal force  $\vec{n}$  and the weight  $\vec{w}$  have the same magnitude! Although that is the case in this example and the preceding one, we'll see many examples in Chapter 5 and later where the magnitude of the normal force is *not* equal to the weight. █

**KEYCONCEPT** In problems involving forces in which you're given velocity, time, and/or displacement data, you'll need to use the equations for motion with constant acceleration as well as Newton's second law.

**TEST YOUR UNDERSTANDING OF SECTION 4.3** Rank the following situations in order of the magnitude of the object's acceleration, from lowest to highest. Are there any cases that have the same magnitude of acceleration? (i) A 2.0 kg object acted on by a 2.0 N net force; (ii) a 2.0 kg object acted on by an 8.0 N net force; (iii) an 8.0 kg object acted on by a 2.0 N net force; (iv) an 8.0 kg object acted on by a 8.0 N net force.

**ANSWER** (i)  $a = 1.0 \text{ m/s}^2$ ; (ii)  $a = 4.0 \text{ m/s}^2$ ; (iii)  $a = 0.25 \text{ m/s}^2$ ; (iv)  $a = 1.0 \text{ m/s}^2$ . The magnitude of the acceleration in each situation is equal to the net force divided by the mass. Hence **(i) and (iv), (ii), (iii)** █

## 4.4 MASS AND WEIGHT

The *weight* of an object is the gravitational force that the earth exerts on the object. (If you are on another planet, your weight is the gravitational force that planet exerts on you.) Unfortunately, the terms "mass" and "weight" are often misused and interchanged in everyday conversation. It's absolutely essential for you to understand clearly the distinctions between these two physical quantities.

Mass characterizes the *inertial* properties of an object. Mass is what keeps the table setting on the table when you yank the tablecloth out from under it. The greater the mass, the greater the force needed to cause a given acceleration; this is reflected in Newton's second law,  $\Sigma \vec{F} = m\vec{a}$ .

Weight, on the other hand, is a *force* exerted on an object by the pull of the earth. Mass and weight are related: Objects that have large mass also have large weight. A large stone is hard to throw because of its large *mass*, and hard to lift off the ground because of its large *weight*.

To understand the relationship between mass and weight, note that a freely falling object has an acceleration of magnitude  $g$  (see Section 2.5). Newton's second law tells us that a force must act to produce this acceleration. If a 1 kg object falls with an acceleration of  $9.8 \text{ m/s}^2$ , the required force has magnitude

$$F = ma = (1 \text{ kg})(9.8 \text{ m/s}^2) = 9.8 \text{ kg} \cdot \text{m/s}^2 = 9.8 \text{ N}$$

The force that makes the object accelerate downward is its weight. Any object near the surface of the earth that has a mass of 1 kg *must* have a weight of 9.8 N to give it the acceleration we observe when it is in free fall. More generally,

$$\text{Magnitude of weight of an object} = w = mg \quad \text{Mass of object} \quad \text{Magnitude of acceleration due to gravity} \quad (4.8)$$


Hence the magnitude  $w$  of an object's weight is directly proportional to its mass  $m$ . The weight of an object is a force, a vector quantity, and we can write Eq. (4.8) as a vector equation (Fig. 4.19):

$$\vec{w} = m\vec{g} \quad (4.9)$$

Remember that  $g$  is the *magnitude* of  $\vec{g}$ , the acceleration due to gravity, so  $g$  is always a positive number, by definition. Thus  $w$ , given by Eq. (4.8), is the *magnitude* of the weight and is also always positive.

**CAUTION** An object's weight acts at all times When keeping track of the external forces on an object, remember that the weight is present *all the time*, whether the object is in free fall or not. If we suspend an object from a rope, it is in equilibrium and its acceleration is zero. But its weight, given by Eq. (4.9), is still pulling down on it (Fig. 4.19). In this case the rope pulls up on the object, applying an upward force. The *vector sum* of the external forces is zero, but the weight still acts. **|**

Figure 4.19 Relating the mass and weight of an object.

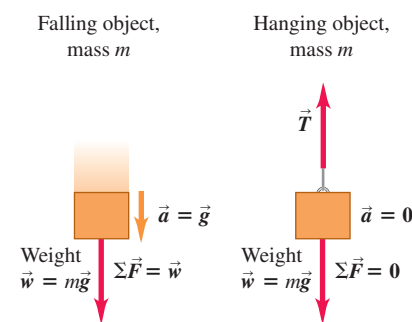

- The relationship of mass to weight:  $\vec{w} = m\vec{g}$ .
- This relationship is the same whether an object is falling or stationary.


### CONCEPTUAL EXAMPLE 4.6 Net external force and acceleration in free fall

In Example 2.6 of Section 2.5, a one-euro coin was dropped from rest from the Leaning Tower of Pisa. If the coin falls freely, so that the effects of the air are negligible, how does the net external force on the coin vary as it falls?

**SOLUTION** In free fall, the acceleration  $\vec{a}$  of the coin is constant and equal to  $\vec{g}$ . Hence by Newton's second law the net external force  $\Sigma\vec{F} = m\vec{a}$  is also constant and equal to  $m\vec{g}$ , which is the coin's weight  $\vec{w}$  (Fig. 4.20). The coin's velocity changes as it falls, but the net external force acting on it is constant.

The net external force on a freely falling coin is constant even if you initially toss it upward. The force that your hand exerts on the coin to toss it is a contact force, and it disappears the instant the coin leaves your hand. From then on, the only force acting on the coin is its weight  $\vec{w}$ .

Figure 4.20 The acceleration of a freely falling object is constant, and so is the net external force acting on the object.



**KEYCONCEPT** The gravitational force on an object (its weight) does not depend on how the object is moving.

### Variation of $g$ with Location

We'll use  $g = 9.80 \text{ m/s}^2$  for problems set on the earth (or, if the other data in the problem are given to only two significant figures,  $g = 9.8 \text{ m/s}^2$ ). In fact, the value of  $g$  varies somewhat from point to point on the earth's surface—from about  $9.78$  to  $9.82 \text{ m/s}^2$ —because the earth is not perfectly spherical and because of effects due to its rotation. At a point where  $g = 9.80 \text{ m/s}^2$ , the weight of a standard kilogram is  $w = 9.80 \text{ N}$ .

Figure 4.21 The weight of a 1 kilogram mass (a) on earth and (b) on the moon.


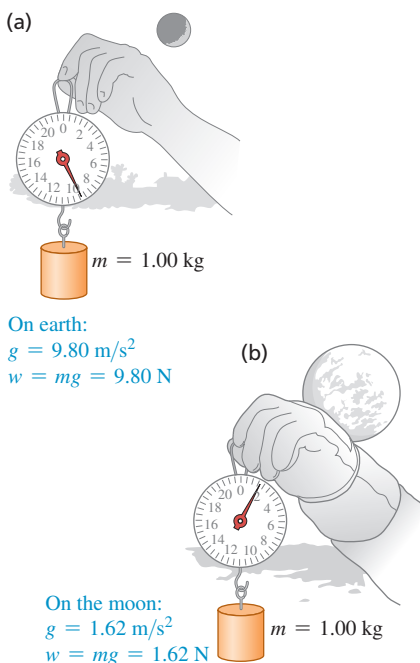


Figure 4.22 An equal-arm balance determines the mass of an object (such as an apple) by comparing its weight to a known weight.

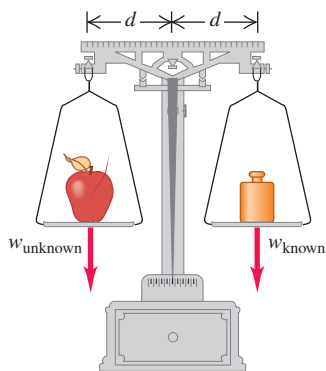

### EXAMPLE 4.7 Mass and weight

A  $2.45 \times 10^4 \text{ N}$  truck traveling in the  $+x$ -direction makes an emergency stop; the  $x$ -component of the net external force acting on it is  $-1.83 \times 10^4 \text{ N}$ . What is its acceleration?

**IDENTIFY and SET UP** Our target variable is the  $x$ -component of the truck's acceleration,  $a_x$ . We use the  $x$ -component portion of Newton's second law, Eqs. (4.7), to relate force and acceleration. To do this, we need to know the truck's mass. The newton is a unit for force, however, so  $2.49 \times 10^4 \text{ N}$  is the truck's *weight*, not its mass. Hence we'll first use Eq. (4.8) to determine the truck's mass from its weight. The truck has a positive  $x$ -velocity and is slowing down, so its  $x$ -acceleration will be negative.

**EXECUTE** The mass of the truck is

$$m = \frac{w}{g} = \frac{2.45 \times 10^4 \text{ N}}{9.80 \text{ m/s}^2} = \frac{2.45 \times 10^4 \text{ kg} \cdot \text{m/s}^2}{9.80 \text{ m/s}^2} = 2540 \text{ kg}$$

At a different point, where  $g = 9.78 \text{ m/s}^2$ , the weight is  $w = 9.78 \text{ N}$  but the mass is still  $1 \text{ kg}$ . The weight of an object varies from one location to another; the mass does not.

If we take a standard kilogram to the surface of the moon, where the value of  $g$  is  $1.62 \text{ m/s}^2$ , its weight is  $1.62 \text{ N}$  but its mass is still  $1 \text{ kg}$  (**Fig. 4.21**). An  $80.0 \text{ kg}$  astronaut has a weight on earth of  $(80.0 \text{ kg})(9.80 \text{ m/s}^2) = 784 \text{ N}$ , but on the moon the astronaut's weight would be only  $(80.0 \text{ kg})(1.62 \text{ m/s}^2) = 130 \text{ N}$ . In Chapter 13 we'll see how to calculate the value of  $g$  at the surface of the moon or on other worlds.

### Measuring Mass and Weight

In Section 4.3 we described a way to compare masses by comparing their accelerations when they are subjected to the same net external force. Usually, however, the easiest way to measure the mass of an object is to measure its weight, often by comparing with a standard. Equation (4.8) says that two objects that have the same weight at a particular location also have the same mass. We can compare weights very precisely; the familiar equal-arm balance (**Fig. 4.22**) can determine with great precision (up to 1 part in  $10^6$ ) when the weights of two objects are equal and hence when their masses are equal.

The concept of mass plays two rather different roles in mechanics. The weight of an object (the gravitational force acting on it) is proportional to its mass as stated in the equation  $w = mg$ ; we call the property related to gravitational interactions *gravitational mass*. On the other hand, we call the inertial property that appears in Newton's second law ( $\Sigma \vec{F} = m\vec{a}$ ) the *inertial mass*. If these two quantities were different, the acceleration due to gravity might well be different for different objects. However, extraordinarily precise experiments have established that in fact the two *are* the same to a precision of better than one part in  $10^{12}$ .

**CAUTION Don't confuse mass and weight** The SI units for mass and weight are often misused in everyday life. For example, it's incorrect to say "This box weighs  $6 \text{ kg}$ ." What this really means is that the *mass* of the box, probably determined indirectly by *weighing*, is  $6 \text{ kg}$ . Avoid this sloppy usage in your own work! In SI units, weight (a force) is measured in newtons, while mass is measured in kilograms. **|**

Then  $\Sigma F_x = ma_x$  gives

$$a_x = \frac{\Sigma F_x}{m} = \frac{-1.83 \times 10^4 \text{ N}}{2540 \text{ kg}} = \frac{-1.83 \times 10^4 \text{ kg} \cdot \text{m/s}^2}{2540 \text{ kg}} = -7.20 \text{ m/s}^2$$

**EVALUATE** The negative sign means that the acceleration vector points in the negative  $x$ -direction, as we expected. The magnitude of this acceleration is pretty high; passengers in this truck will experience a lot of rearward force from their seat belts.

**KEYCONCEPT** In problems involving Newton's second law, make sure that for  $m$  you use the mass of the object, *not* its weight.



**TEST YOUR UNDERSTANDING OF SECTION 4.4** Suppose an astronaut landed on a planet where  $g = 19.6 \text{ m/s}^2$ . Compared to earth, would it be easier, harder, or just as easy for her to walk around? Would it be easier, harder, or just as easy for her to catch a ball that is moving horizontally at  $12 \text{ m/s}$ ? (Assume that the astronaut's spacesuit is a lightweight model that doesn't impede her movements in any way.)

**ANSWER**

It would take twice the effort for the astronaut to walk around because her weight on the planet would be twice as much as on the earth. But it would be just as easy to catch a ball moving horizontally. The ball's *mass* is the same as on earth, so the horizontal force the astronaut would have to exert to bring it to a stop (i.e., to give it the same acceleration) would also be the same as on earth.

## 4.5 NEWTON'S THIRD LAW

A force acting on an object is always the result of its interaction with another object, so forces always come in pairs. You can't pull on a doorknob without the doorknob pulling back on you. When you kick a football, your foot exerts a forward force on the ball, but you also feel the force the ball exerts back on your foot.

In each of these cases, the force that you exert on the other object is in the opposite direction to the force that object exerts on you. Experiments show that whenever two objects interact, the two forces that they exert on each other are always *equal in magnitude* and *opposite in direction*. This fact is called *Newton's third law of motion*:

**NEWTON'S THIRD LAW OF MOTION** If object *A* exerts a force on object *B* (an “action”), then object *B* exerts a force on object *A* (a “reaction”). These two forces have the same magnitude but are opposite in direction. These two forces act on *different* objects.

For example, in **Fig. 4.23**  $\vec{F}_{A \text{ on } B}$  is the force applied by object *A* (first subscript) on object *B* (second subscript), and  $\vec{F}_{B \text{ on } A}$  is the force applied by object *B* (first subscript) on object *A* (second subscript). In equation form,

**Newton's third law:** When two objects *A* and *B* exert forces on each other ...

$$\vec{F}_{A \text{ on } B} = -\vec{F}_{B \text{ on } A} \quad (4.10)$$

... the two forces have the same magnitude but opposite directions.

*Note:* The two forces act on *different* objects.


It doesn't matter whether one object is inanimate (like the football in Fig. 4.23) and the other is not (like the kicker's foot): They necessarily exert forces on each other that obey Eq. (4.10). **?**

In the statement of Newton's third law, “action” and “reaction” are the two opposite forces (in Fig. 4.23,  $\vec{F}_{A \text{ on } B}$  and  $\vec{F}_{B \text{ on } A}$ ); we sometimes refer to them as an **action–reaction pair**. This is *not* meant to imply any cause-and-effect relationship; we can consider either force as the “action” and the other as the “reaction.” We often say simply that the forces are “equal and opposite,” meaning that they have equal magnitudes and opposite directions.

**CAUTION** **The two forces in an action–reaction pair act on different objects** We stress that the two forces described in Newton's third law act on *different* objects. This is important when you solve problems involving Newton's first or second law, which involve the forces that act *on* an object. For instance, the net external force on the football in Fig. 4.23 is the vector sum of the weight of the ball and the force  $\vec{F}_{A \text{ on } B}$  exerted by kicker *A* on the ball *B*. You wouldn't include the force  $\vec{F}_{B \text{ on } A}$  because this force acts on the kicker *A*, *not* on the ball. **|**

Figure 4.23 Newton's third law of motion.

If object *A* exerts force  $\vec{F}_{A \text{ on } B}$  on object *B* (for example, a foot kicks a ball) ...



... then object *B* necessarily exerts force  $\vec{F}_{B \text{ on } A}$  on object *A* (ball kicks back on foot).

The two forces have the same magnitude but opposite directions:  $\vec{F}_{A \text{ on } B} = -\vec{F}_{B \text{ on } A}$ .

**APPLICATION Blame Newton's**

**Laws** This car stopped because of Newton's second and third laws. During the impact, the car exerted a force on the tree; in accordance with the third law, the tree exerted an equally strong force back on the car. In accordance with the second law, the force of the tree on the car gave the car an acceleration that changed its velocity to zero.



In Fig. 4.23 the action and reaction forces are *contact* forces that are present only when the two objects are touching. But Newton's third law also applies to *long-range* forces that do not require physical contact, such as the force of gravitational attraction. A table-tennis ball exerts an upward gravitational force on the earth that's equal in magnitude to the downward gravitational force the earth exerts on the ball. When you drop the ball, both the ball and the earth accelerate toward each other. The net force on each object has the same magnitude, but the earth's acceleration is microscopically small because its mass is so great. Nevertheless, it does move!

**CAUTION Contact forces need contact** If your fingers push on an object, the force you exert acts only when your fingers and the object are in contact. Once contact is broken, the force is no longer present even if the object is still moving. |

**CONCEPTUAL EXAMPLE 4.8 Which force is greater?**

After your sports car breaks down, you start to push it to the nearest repair shop. While the car is starting to move, how does the force you exert on the car compare to the force the car exerts on you? How do these forces compare when you are pushing the car along at a constant speed?

**SOLUTION** Newton's third law says that in *both* cases, the force you exert on the car is equal in magnitude and opposite in direction to the force the car exerts on you. It's true that you have to push harder to get the car going than to keep it going. But no matter how hard you push on the car, the car pushes just as hard back on you. Newton's third law gives the same result whether the two objects are at rest, moving with constant velocity, or accelerating.

You may wonder how the car “knows” to push back on you with the same magnitude of force that you exert on it. It may help to visualize the forces you and the car exert on each other as interactions between the atoms at the surface of your hand and the atoms at the surface of the car. These interactions are analogous to miniature springs between adjacent atoms, and a compressed spring exerts equally strong forces on both of its ends.

**KEYCONCEPT** No matter how two interacting objects are moving, the forces that they exert on each other always have the same magnitude and point in opposite directions.

**CONCEPTUAL EXAMPLE 4.9 Newton's third law I: Objects at rest**

An apple sits at rest on a table, in equilibrium. What forces act on the apple? What is the reaction force to each of the forces acting on the apple? What are the action–reaction pairs?

**SOLUTION** Figure 4.24a shows the forces acting on the apple.  $\vec{F}_{\text{earth on apple}}$  is the weight of the apple—that is, the downward gravitational force exerted *by* the earth *on* the apple. Similarly,  $\vec{F}_{\text{table on apple}}$  is the upward normal force exerted *by* the table *on* the apple.

Figure 4.24b shows one of the action–reaction pairs involving the apple. As the earth pulls down on the apple, with force  $\vec{F}_{\text{earth on apple}}$ , the apple exerts an equally strong upward pull on the earth  $\vec{F}_{\text{apple on earth}}$ . By Newton's third law (Eq. 4.10) we have

$$\vec{F}_{\text{apple on earth}} = -\vec{F}_{\text{earth on apple}}$$


Figure 4.24c shows the other action–reaction pair involving the apple. The table pushes up on the apple with force  $\vec{F}_{\text{table on apple}}$ ; the corresponding reaction is the downward force  $\vec{F}_{\text{apple on table}}$  exerted by the apple on the table. For this action–reaction pair we have

$$\vec{F}_{\text{apple on table}} = -\vec{F}_{\text{table on apple}}$$

The two forces acting on the apple in Fig. 4.24a,  $\vec{F}_{\text{table on apple}}$  and  $\vec{F}_{\text{earth on apple}}$ , are *not* an action–reaction pair, despite being equal in magnitude and opposite in direction. They do not represent the mutual interaction of two objects; they are two different forces acting on the *same* object. Figure 4.24d shows another way to see this. If we suddenly yank the table out from under the apple, the forces  $\vec{F}_{\text{apple on table}}$  and  $\vec{F}_{\text{table on apple}}$  suddenly become zero, but  $\vec{F}_{\text{apple on earth}}$  and  $\vec{F}_{\text{earth on apple}}$  are unchanged (the gravitational interaction is still present). Because  $\vec{F}_{\text{table on apple}}$  is now zero, it can't be the negative of the nonzero  $\vec{F}_{\text{earth on apple}}$ , and these two forces can't be an action–reaction pair. *The two forces in an action–reaction pair never act on the same object.*

**KEYCONCEPT** The two forces in an action–reaction pair always act on two different objects.

Figure 4.24 Identifying action–reaction pairs.

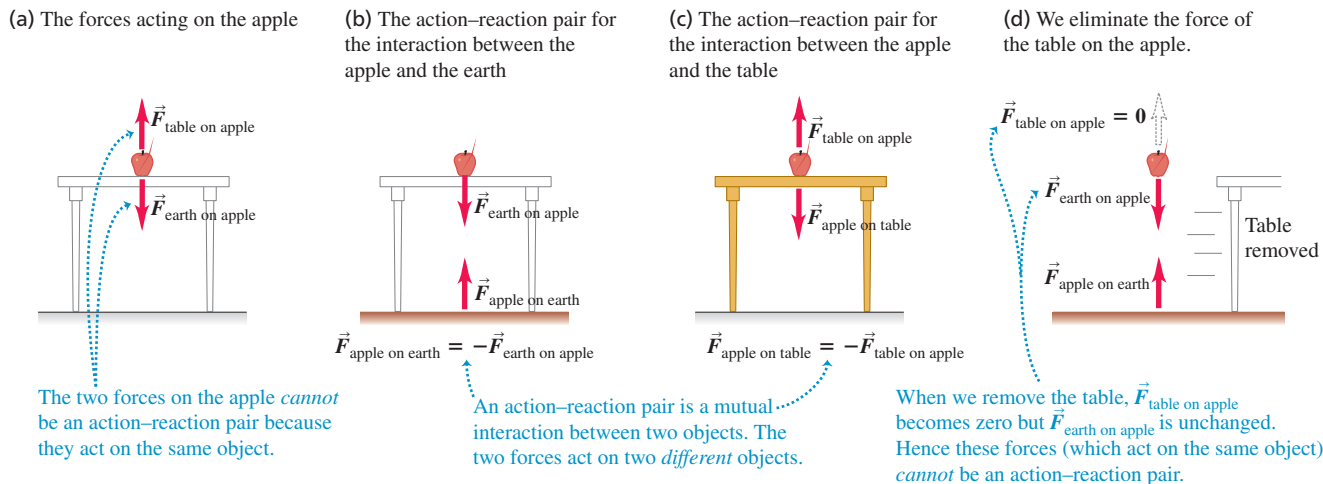

### CONCEPTUAL EXAMPLE 4.10 Newton's third law II: Objects in motion

A stonemason drags a marble block across a floor by pulling on a rope attached to the block (Fig. 4.25a). The block is not necessarily in equilibrium. What are the forces that correspond to the interactions between the block, rope, and mason? What are the action–reaction pairs?

**SOLUTION** We'll use the subscripts B for the block, R for the rope, and M for the mason. In Fig. 4.25b  $\vec{F}_{\text{M on R}}$  is the force exerted by the *mason* on the *rope*, and the corresponding reaction is the force  $\vec{F}_{\text{R on M}}$  exerted by the *rope* on the *mason*. Similarly,  $\vec{F}_{\text{R on B}}$  is the force exerted by the *rope* on the *block*, and the corresponding reaction is the force  $\vec{F}_{\text{B on R}}$  exerted by the *block* on the *rope*. The forces in each action–reaction pair are equal and opposite:


$$\vec{F}_{\text{R on M}} = -\vec{F}_{\text{M on R}} \quad \text{and} \quad \vec{F}_{\text{B on R}} = -\vec{F}_{\text{R on B}}$$

Forces  $\vec{F}_{\text{M on R}}$  and  $\vec{F}_{\text{B on R}}$  (Fig. 4.25c) are *not* an action–reaction pair because both of these forces act on the *same* object (the rope); an action and its reaction *must* always act on *different* objects. Furthermore, the forces  $\vec{F}_{\text{M on R}}$  and  $\vec{F}_{\text{B on R}}$  are not necessarily equal in magnitude. Applying Newton's second law to the rope, we get

$$\Sigma \vec{F} = \vec{F}_{\text{M on R}} + \vec{F}_{\text{B on R}} = m_{\text{R}} \vec{a}_{\text{R}}$$

If the block and rope are accelerating (speeding up or slowing down), the rope is not in equilibrium, and  $\vec{F}_{\text{M on R}}$  must have a different magnitude than  $\vec{F}_{\text{B on R}}$ . By contrast, the action–reaction forces  $\vec{F}_{\text{M on R}}$  and  $\vec{F}_{\text{R on M}}$  are always equal in magnitude, as are  $\vec{F}_{\text{R on B}}$  and  $\vec{F}_{\text{B on R}}$ . Newton's third law holds whether or not the objects are accelerating.

Figure 4.25 Identifying the interaction forces when a mason pulls on a rope attached to a block.

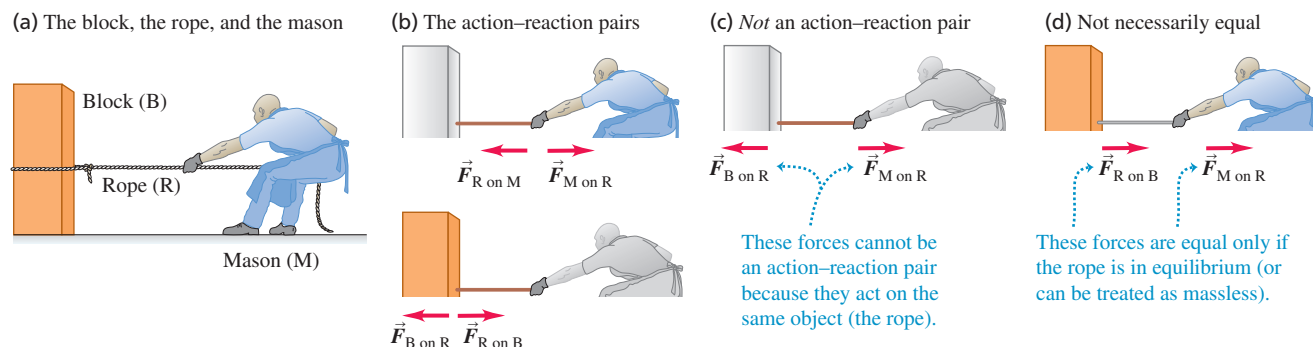

In the special case in which the rope is in equilibrium, the forces  $\vec{F}_{\text{M on R}}$  and  $\vec{F}_{\text{B on R}}$  are equal in magnitude and opposite in direction. But this is an example of Newton's *first* law, not his third; these are two forces on the same object, not forces of two objects on each other. Another way to look at this is that in equilibrium,  $\vec{a}_{\text{R}} = \mathbf{0}$  in the previous equation. Then  $\vec{F}_{\text{B on R}} = -\vec{F}_{\text{M on R}}$  because of Newton's first law.

Another special case is if the rope is accelerating but has negligibly small mass compared to that of the block or the mason. In this case,  $m_{\text{R}} = 0$  in the previous equation, so again  $\vec{F}_{\text{B on R}} = -\vec{F}_{\text{M on R}}$ . Since Newton's third law says that  $\vec{F}_{\text{B on R}}$  *always* equals  $-\vec{F}_{\text{R on B}}$  (they are an action–reaction pair), in this “massless-rope” case  $\vec{F}_{\text{R on B}}$  also equals  $\vec{F}_{\text{M on R}}$ .

For both the “massless-rope” case and a rope in equilibrium, the rope exerts the same force on the block as the mason exerts on the rope (Fig. 4.25d). Hence we can think of the rope as “transmitting” to the block the force the mason exerts on the rope. But remember that this is true *only* when the rope has negligibly small mass or is in equilibrium.

**KEYCONCEPT** In problems that involve more than one object, use Newton's third law to relate the forces that the objects exert on each other.

### CONCEPTUAL EXAMPLE 4.11 A Newton's third law paradox?


We saw in Conceptual Example 4.10 that the stonemason pulls as hard on the rope–block combination as that combination pulls back on him. Why, then, does the block move while the stonemason remains stationary?

**SOLUTION** To resolve this seeming paradox, keep in mind the difference between Newton's *second* and *third* laws. The only forces involved in Newton's second law are those that act *on* a given object. The vector sum of these forces determines the object's acceleration, if any. By contrast, Newton's third law relates the forces that two *different* objects exert on *each other*. The third law alone tells you nothing about the motion of either object.

If the rope–block combination is initially at rest, it begins to slide if the stonemason exerts a force on the rope  $\vec{F}_{M \text{ on } R}$  that is *greater* in magnitude than the friction force that the floor exerts on the block (**Fig. 4.26**). Then there is a net external force to the right on the rope–block combination, and it accelerates to the right. By contrast, the stonemason *doesn't* move because the net external force acting on him is *zero*. His shoes have nonskid soles that don't slip on the floor, so the friction force that the floor exerts on him is strong enough to balance the pull of the rope on him,  $\vec{F}_{R \text{ on } M}$ . (Both the block and the stonemason also experience a downward force of gravity and an upward normal force exerted by the floor. These forces balance each other, and so don't affect the motion of the block or the mason.)

Once the block is moving, the stonemason doesn't need to pull as hard; he must exert only enough force to balance the friction force on the block. Then the net external force on the moving block is zero, and by Newton's first law the block continues to move toward the mason at a constant velocity.

Figure 4.26 The horizontal forces acting on the block–rope combination (left) and the mason (right). (The vertical forces are not shown.)

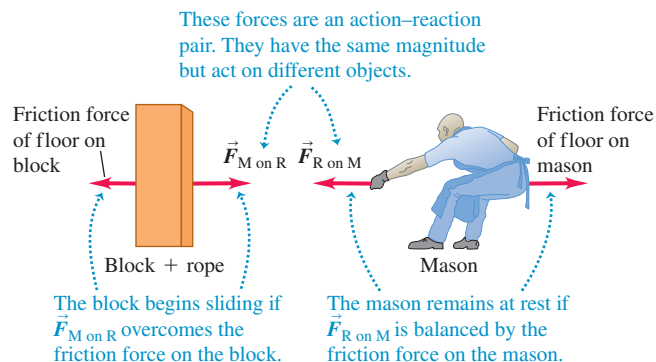

So the block accelerates but the stonemason doesn't because different amounts of friction act on them. If the floor were freshly waxed, so that there was little friction between the floor and the stonemason's shoes, pulling on the rope might start the block sliding to the right *and* start him sliding to the left.

Here's the moral: When analyzing the motion of an object, remember that only the forces acting *on* an object determine its motion. From this perspective, Newton's third law is merely a tool that can help you determine what those forces are.

**KEYCONCEPT** The motion of an object depends on the forces that are exerted on it, not the forces that it exerts on other objects.

An object that has pulling forces applied at its ends, such as the rope in Fig. 4.25, is said to be in *tension*. The **tension** at any point along the rope is the magnitude of the force acting at that point (see Fig. 4.2c). In Fig. 4.25b the tension at the right end of the rope is the magnitude of  $\vec{F}_{M \text{ on } R}$  (or of  $\vec{F}_{R \text{ on } M}$ ), and the tension at the left end is the magnitude of  $\vec{F}_{B \text{ on } R}$  (or of  $\vec{F}_{R \text{ on } B}$ ). If the rope is in equilibrium and if no forces act except at its ends, the net external force on the rope is zero and the tension is the *same* at both ends and throughout the rope. Thus, if the magnitudes of  $\vec{F}_{B \text{ on } R}$  and  $\vec{F}_{M \text{ on } R}$  are 50 N each, the tension in the rope is 50 N (*not* 100 N). The same is true if we can regard the rope as “massless” (that is, if its mass is small compared to that of the objects to which it's attached).

We emphasize once again that the two forces in an action–reaction pair *never* act on the same object. Remembering this fact can help you avoid confusion about action–reaction pairs and Newton's third law.

**TEST YOUR UNDERSTANDING OF SECTION 4.5** You are driving a car on a country road when a mosquito splatters on the windshield. Which has the greater magnitude: the force that the car exerted on the mosquito or the force that the mosquito exerted on the car? Or are the magnitudes the same? If they are different, how can you reconcile this fact with Newton's third law? If they are equal, why is the mosquito splattered while the car is undamaged?

#### ANSWER

By Newton's third law, the two forces have equal magnitude. Because the car has much greater mass than the mosquito, it undergoes only a tiny, imperceptible acceleration in response to the force of the impact. By contrast, the mosquito, with its minuscule mass, undergoes a catastrophically large acceleration.

## 4.6 FREE-BODY DIAGRAMS

Newton's three laws of motion contain all the basic principles we need to solve a wide variety of problems in mechanics. These laws are very simple in form, but the process of applying them to specific situations can pose real challenges. In this brief section we'll point out three key ideas and techniques to use in any problems involving Newton's laws. You'll learn others in Chapter 5, which also extends the use of Newton's laws to cover more complex situations.

1. *Newton's first and second laws apply to a specific object.* Whenever you use Newton's first law,  $\sum \vec{F} = \mathbf{0}$ , for an equilibrium situation or Newton's second law,  $\sum \vec{F} = m\vec{a}$ , for a nonequilibrium situation, you must decide at the beginning to which object you are referring. This decision may sound trivial, but it isn't.
2. *Only forces acting on the object matter.* The sum  $\sum \vec{F}$  includes all the forces that act on the object in question. Hence, once you've chosen the object to analyze, you have to identify all the forces acting on it. Don't confuse the forces acting on a object with the forces exerted by that object on some other object. For example, to analyze a person walking, you would include in  $\sum \vec{F}$  the force that the ground exerts on the person as he walks, but *not* the force that the person exerts on the ground (Fig. 4.27). These forces form an action–reaction pair and are related by Newton's third law, but only the member of the pair that acts on the object you're working with goes into  $\sum \vec{F}$ .
3. *Free-body diagrams are essential to help identify the relevant forces.* A **free-body diagram** shows the chosen object by itself, “free” of its surroundings, with vectors drawn to show the magnitudes and directions of all the forces that act on the object. (Here “body” is another word for “object.”) We've shown free-body diagrams in Figs. 4.17, 4.18, 4.19, and 4.24a. Be careful to include all the forces acting *on* the object, but be equally careful *not* to include any forces that the object exerts on any other object. In particular, the two forces in an action–reaction pair must *never* appear in the same free-body diagram because they never act on the same object. Furthermore, never include forces that a object exerts on itself, since these can't affect the object's motion.

When a problem involves more than one object, you have to take the problem apart and draw a separate free-body diagram for each object. For example, Fig. 4.25c shows a separate free-body diagram for the rope in the case in which the rope is considered massless (so that no gravitational force acts on it). Figure 4.26 also shows diagrams for the block and the mason, but these are *not* complete free-body diagrams because they don't show all the forces acting on each object. (We left out the vertical forces—the weight force exerted by the earth and the upward normal force exerted by the floor.)

In Fig. 4.28 (next page) we present three real-life situations and the corresponding complete free-body diagrams. Note that in each situation a person exerts a force on something in his or her surroundings, but the force that shows up in the person's free-body diagram is the surroundings pushing back *on* the person.

**CAUTION Forces in free-body diagrams** For a free-body diagram to be complete, you *must* be able to answer this question for each force: What other object is applying this force? If you can't answer that question, you may be dealing with a nonexistent force. Avoid nonexistent forces such as “the force of acceleration” or “the  $m\vec{a}$  force,” discussed in Section 4.3. **|**

**TEST YOUR UNDERSTANDING OF SECTION 4.6** The buoyancy force shown in Fig. 4.28c is one half of an action–reaction pair. What force is the other half of this pair? (i) The weight of the swimmer; (ii) the forward thrust force; (iii) the backward drag force; (iv) the downward force that the swimmer exerts on the water; (v) the backward force that the swimmer exerts on the water by kicking.


### ANSWER

(iv) The buoyancy force is an *upward* force that the water exerts on the swimmer. By Newton's third law, the other half of the action–reaction pair is a *downward* force that the swimmer exerts on the water and has the same magnitude as the buoyancy force. It's true that the weight of the swimmer is also downward and has the same magnitude as the buoyancy force; however, the weight acts on the same object (the swimmer) as the buoyancy force, and so these forces aren't an action–reaction pair.

Figure 4.27 The simple act of walking depends crucially on Newton's third law. To start moving forward, you push backward on the ground with your foot. As a reaction, the ground pushes forward on your foot (and hence on your body as a whole) with a force of the same magnitude. This *external* force provided by the ground is what accelerates your body forward.




Figure 4.28 Examples of free-body diagrams. Each free-body diagram shows all of the external forces that act on the object in question.

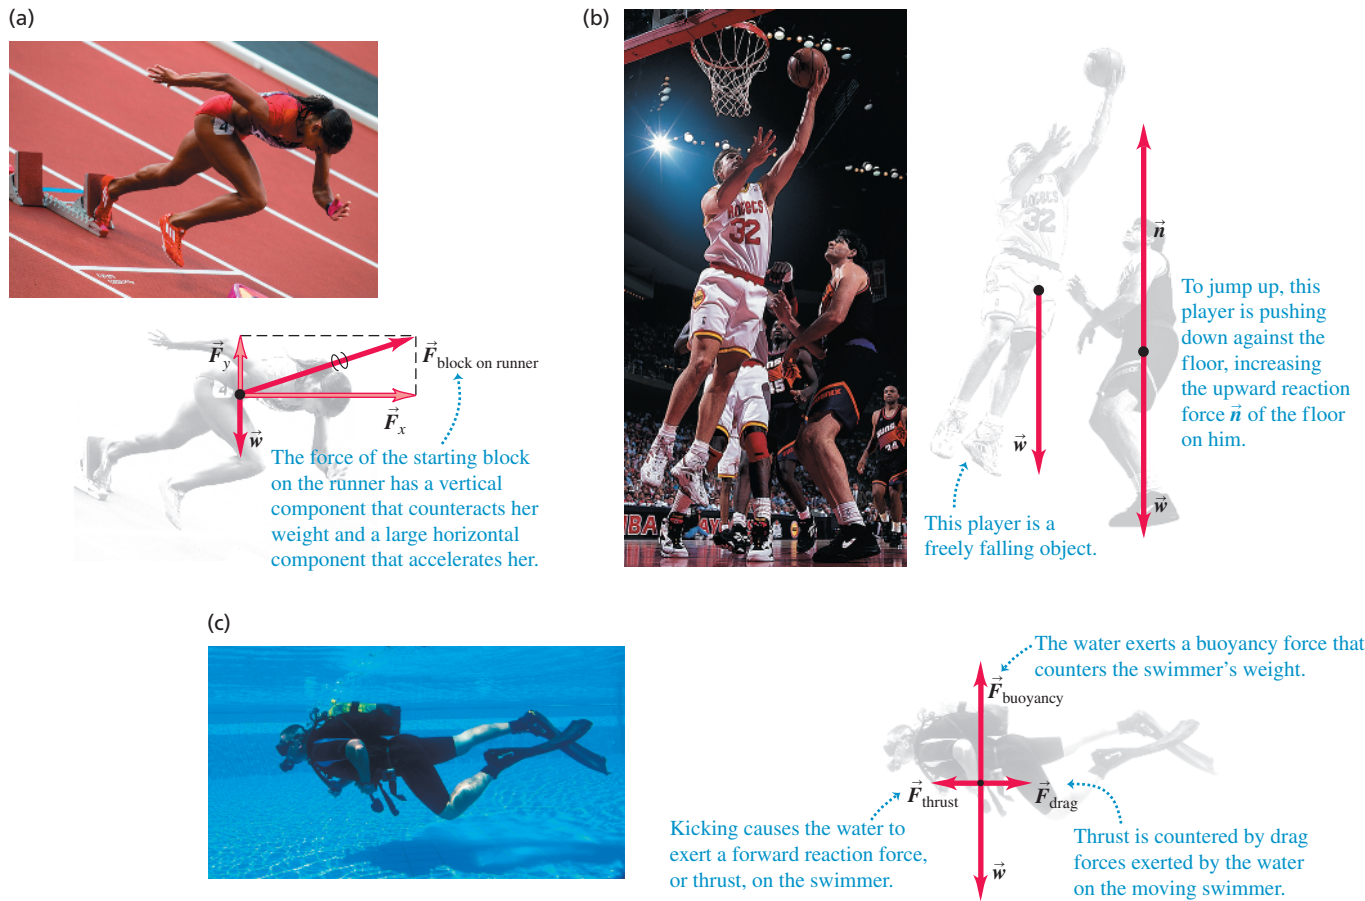

## CHAPTER 4 SUMMARY


**Force as a vector:** Force is a quantitative measure of the interaction between two objects. It is a vector quantity. When several external forces act on an object, the effect on its motion is the same as if a single force, equal to the vector sum (resultant) of the forces, acts on the object. (See Example 4.1.)

$$\vec{R} = \sum \vec{F} = \vec{F}_1 + \vec{F}_2 + \vec{F}_3 + \dots \quad (4.1)$$



**The net external force on an object and Newton's first law:** Newton's first law states that when the vector sum of all external forces acting on an object (the *net external force*) is zero, the object is in equilibrium and has zero acceleration. If the object is initially at rest, it remains at rest; if it is initially in motion, it continues to move with constant velocity. This law is valid in inertial frames of reference only. (See Examples 4.2 and 4.3.)


$$\sum \vec{F} = 0 \quad (4.3)$$



**Mass, acceleration, and Newton's second law:** The inertial properties of an object are characterized by its *mass*. Newton's second law states that the acceleration of an object under the action of a given set of external forces is directly proportional to the vector sum of the forces (the *net force*) and inversely proportional to the mass of the object. Like Newton's first law, this law is valid in inertial frames of reference only. In SI units, the unit of force is the newton (N), equal to  $1 \text{ kg} \cdot \text{m}/\text{s}^2$ . (See Examples 4.4 and 4.5.)


$$\Sigma \vec{F} = m\vec{a} \quad (4.6)$$

$$\begin{aligned} \Sigma F_x &= ma_x \\ \Sigma F_y &= ma_y \\ \Sigma F_z &= ma_z \end{aligned} \quad (4.7)$$




**Weight:** The weight  $\vec{w}$  of an object is the gravitational force exerted on it by the earth. Weight is a vector quantity. The magnitude of the weight of an object at any specific location is equal to the product of its mass  $m$  and the magnitude of the acceleration due to gravity  $g$  at that location. The weight of an object depends on its location; its mass does not. (See Examples 4.6 and 4.7.)

$$w = mg \quad (4.8)$$



**Newton's third law and action–reaction pairs:** Newton's third law states that when two objects interact, they exert forces on each other that are equal in magnitude and opposite in direction. These forces are called action and reaction forces. Each of these two forces acts on only one of the two objects; they never act on the same object. (See Examples 4.8–4.11.)

$$\vec{F}_{A \text{ on } B} = -\vec{F}_{B \text{ on } A} \quad (4.10)$$



Chapter 4 Media Assets



## GUIDED PRACTICE

For assigned homework and other learning materials, go to Mastering Physics.

### KEY EXAMPLE VARIATION PROBLEMS

Be sure to review **EXAMPLE 4.1** (Section 4.1) before attempting these problems.

**VP4.1.1** Three professional wrestlers are fighting over a champion's belt, and each exerts a force on the belt. Wrestler 1 exerts a force  $F_1 = 40.0 \text{ N}$  in the  $+x$ -direction, wrestler 2 exerts a force  $F_2 = 80.0 \text{ N}$  in the  $-y$ -direction, and wrestler 3 exerts a force  $F_3 = 60.0 \text{ N}$  at an angle of  $36.9^\circ$  counterclockwise from the  $+x$ -direction. Find the  $x$ - and  $y$ -components of the net external force on the belt, and find the force's magnitude and direction.

**VP4.1.2** Three forces act on a statue. Force  $\vec{F}_1$  (magnitude  $45.0 \text{ N}$ ) points in the  $+x$ -direction, force  $\vec{F}_2$  (magnitude  $105 \text{ N}$ ) points in the  $+y$ -direction, and force  $\vec{F}_3$  (magnitude  $235 \text{ N}$ ) is at an angle of  $36.9^\circ$  from the  $-x$ -direction and  $53.1^\circ$  from the  $+y$ -direction. Find the  $x$ - and  $y$ -components of the net external force on the statue, and find the force's magnitude and direction.

**VP4.1.3** An eagle descends steeply onto its prey. Its weight (the gravitational force on the eagle), of magnitude  $60.0 \text{ N}$ , points downward in the  $-y$ -direction. The lift force exerted on the eagle's wings by the air, also of magnitude  $60.0 \text{ N}$ , is at an angle of  $20.0^\circ$  from

the vertical (the  $+y$ -direction) and  $70.0^\circ$  from the  $+x$ -direction. The drag force (air resistance) exerted on the eagle by the air has magnitude  $15.0 \text{ N}$  and is at an angle of  $20.0^\circ$  from the  $-x$ -direction and  $70.0^\circ$  from the  $+y$ -direction. Find the  $x$ - and  $y$ -components of the net external force on the eagle, and find the force's magnitude and direction.

**VP4.1.4** A box containing pizza sits on a table. Ernesto, who sits due east of the pizza box, pulls the box toward him with a force of  $35.0 \text{ N}$ . Kamala, who sits due north of the pizza box, pulls the box toward her with a  $50.0 \text{ N}$  force. Tsuroku also sits at the table and pulls the box toward her so that the net external force on the box is  $24.0 \text{ N}$  in a direction  $30.0^\circ$  south of west. Take the  $+x$ -direction to be due east and the  $+y$ -direction to be due north. Find the  $x$ - and  $y$ -components of the force that Tsuroku exerts, and find the force's magnitude and direction.

Be sure to review **EXAMPLE 4.4** (Section 4.3) before attempting these problems.

**VP4.4.1** A box of books with mass  $55 \text{ kg}$  rests on the level floor of the campus bookstore. The floor is freshly waxed and has negligible friction.

A bookstore worker applies a constant horizontal force with magnitude 25 N to the box. What is the magnitude of the acceleration of the box?

**VP4.4.2** A block of cheese of mass 2.0 kg sits on a freshly waxed, essentially frictionless table. You apply a constant horizontal force of 0.50 N to the cheese. (a) Name the three external forces that act on the cheese and what exerts each force. (b) What is the magnitude of the acceleration of the cheese?

**VP4.4.3** In a game of ice hockey, you use a hockey stick to hit a puck of mass 0.16 kg that slides on essentially frictionless ice. During the hit you exert a constant horizontal force on the puck that gives it an acceleration of  $75 \text{ m/s}^2$  for a fraction of a second. (a) During the hit, what is the magnitude of the horizontal force that you exert on the puck? (b) How does the magnitude of the normal force due to the ice compare to the weight of the puck?

**VP4.4.4** A plate of cafeteria food is on a horizontal table. You push it away from you with a constant horizontal force of 14.0 N. The plate has a mass of 0.800 kg, and during the push it has an acceleration of  $12.0 \text{ m/s}^2$  in the direction you are pushing it. (a) What is the magnitude of the net external force on the plate during the push? (b) What are the magnitude and direction of the friction force that the table exerts on the plate during the push?

**Be sure to review EXAMPLE 4.5 (Section 4.3) before attempting these problems.**

**VP4.5.1** On a winter day a child of mass 20.0 kg slides on a horizontal footpath covered in ice. Initially she is moving at 3.00 m/s, but due to

friction she comes to a halt in 2.25 m. What is the magnitude of the constant friction force that acts on her as she slides?

**VP4.5.2** An airliner of mass  $1.70 \times 10^5 \text{ kg}$  lands at a speed of 75.0 m/s. As it travels along the runway, the combined effects of air resistance, friction from the tires, and reverse thrust from the engines produce a constant force of  $2.90 \times 10^5 \text{ N}$  opposite to the airliner's motion. What distance along the runway does the airliner travel before coming to a halt?

**VP4.5.3** A truck of mass  $2.40 \times 10^3 \text{ kg}$  is moving at 25.0 m/s. When the driver applies the brakes, the truck comes to a stop after traveling 48.0 m. (a) How much time is required for the truck to stop? (b) What is the magnitude of the truck's constant acceleration as it slows down? (c) What is the magnitude of the constant braking force that acts on the truck as it slows down?

**VP4.5.4** A car of mass  $1.15 \times 10^3 \text{ kg}$  is stalled on a horizontal road. You and your friends give the car a constant, forward, horizontal push. There is friction between the car and the road. (a) Name the four external forces that act on the car as you and your friends push it and what exerts each force. (You can regard the combined push from you and your friends as a single force.) (b) The combined force that you and your friends exert has magnitude  $8.00 \times 10^2 \text{ N}$ , and starting from rest the car reaches a speed of 1.40 m/s after you have pushed it 5.00 m. Find the magnitude of the constant friction force that acts on the car.

## BRIDGING PROBLEM Links in a Chain

A student suspends a chain consisting of three links, each of mass  $m = 0.250 \text{ kg}$ , from a light rope. The rope is attached to the top link of the chain, which does not swing. She pulls upward on the rope, so that the rope applies an upward force of 9.00 N to the chain. (a) Draw a free-body diagram for the entire chain, considered as an object, and one for each of the three links. (b) Use the diagrams of part (a) and Newton's laws to find (i) the acceleration of the chain, (ii) the force exerted by the top link on the middle link, and (iii) the force exerted by the middle link on the bottom link. Treat the rope as massless.

### SOLUTION GUIDE

#### IDENTIFY and SET UP

- There are four objects of interest in this problem: the chain as a whole and the three individual links. For each of these four objects, make a list of the external forces that act on it. Besides the force of gravity, your list should include only forces exerted by other objects that *touch* the object in question.
- Some of the forces in your lists form action–reaction pairs (one pair is the force of the top link on the middle link and the force of the middle link on the top link). Identify all such pairs.
- Use your lists to help you draw a free-body diagram for each of the four objects. Choose the coordinate axes.

- Use your lists to decide how many unknowns there are in this problem. Which of these are target variables?

#### EXECUTE

- Write a Newton's second law equation for each of the four objects, and write a Newton's third law equation for each action–reaction pair. You should have at least as many equations as there are unknowns (see step 4). Do you?
- Solve the equations for the target variables.

#### EVALUATE

- You can check your results by substituting them back into the equations from step 5. This is especially important to do if you ended up with more equations in step 5 than you used in step 6.
- Rank the force of the rope on the chain, the force of the top link on the middle link, and the force of the middle link on the bottom link in order from smallest to largest magnitude. Does this ranking make sense? Explain.
- Repeat the problem for the case in which the upward force that the rope exerts on the chain is only 7.35 N. Is the ranking in step 8 the same? Does this make sense?




## PROBLEMS

•, ••, •••: Difficulty levels. **CP**: Cumulative problems incorporating material from earlier chapters. **CALC**: Problems requiring calculus. **DATA**: Problems involving real data, scientific evidence, experimental design, and/or statistical reasoning. **BIO**: Biosciences problems.

### DISCUSSION QUESTIONS

- Q4.1** Can an object be in equilibrium when only one force acts on it? Explain.
- Q4.2** A ball thrown straight up has zero velocity at its highest point. Is the ball in equilibrium at this point? Why or why not?
- Q4.3** A helium balloon hovers in midair, neither ascending nor descending. Is it in equilibrium? What forces act on it?
- Q4.4** When you fly in an airplane at night in smooth air, you have no sensation of motion, even though the plane may be moving at 800 km/h. Why?
- Q4.5** If the two ends of a rope in equilibrium are pulled with forces of equal magnitude and opposite directions, why isn't the total tension in the rope zero?
- Q4.6** You tie a brick to the end of a rope and whirl the brick around you in a horizontal circle. Describe the path of the brick after you suddenly let go of the rope.
- Q4.7** When a car stops suddenly, the passengers tend to move forward relative to their seats. Why? When a car makes a sharp turn, the passengers tend to slide to one side of the car. Why?
- Q4.8** Some people say that the “force of inertia” (or “force of momentum”) throws the passengers forward when a car brakes sharply. What is wrong with this explanation?
- Q4.9** A passenger in a moving bus with no windows notices that a ball that has been at rest in the aisle suddenly starts to move toward the rear of the bus. Think of two possible explanations, and devise a way to decide which is correct.
- Q4.10** Suppose you chose the fundamental physical quantities to be force, length, and time instead of mass, length, and time. What would be the units of mass in terms of those fundamental quantities?
- Q4.11** Why is the earth only approximately an inertial reference frame?
- Q4.12** Does Newton's second law hold true for an observer in a van as it speeds up, slows down, or rounds a corner? Explain.
- Q4.13** Some students refer to the quantity  $m\vec{a}$  as “the force of acceleration.” Is it correct to refer to this quantity as a force? If so, what exerts this force? If not, what is a better description of this quantity?
- Q4.14** The acceleration of a falling object is measured in a lift that is traveling upward at a constant speed of 9.8 m/s. What value is obtained?
- Q4.15** You can play catch with a softball in a bus moving with constant speed on a straight road, just as though the bus were at rest. Is this still possible when the bus is making a turn at constant speed on a level road? Why or why not?
- Q4.16** Students sometimes say that the force of gravity on an object is  $9.8 \text{ m/s}^2$ . What is wrong with this view?
- Q4.17** Why can it hurt your foot more to kick a big rock than a small pebble? *Must* the big rock hurt more? Explain.
- Q4.18** “It's not the fall that hurts you; it's the sudden stop at the bottom.” Translate this saying into the language of Newton's laws of motion.
- Q4.19** A person can dive into water from a height of 10 m without injury, but a person who jumps off the roof of a 10-m-tall building and lands on a concrete street is likely to be seriously injured. Why is there a difference?
- Q4.20** Why are cars designed to crumple in front and back for safety? Why not for side collisions and rollovers?
- Q4.21** When a string barely strong enough lifts a heavy weight, it can lift the weight by a steady pull; but if you jerk the string, it will break. Explain in terms of Newton's laws of motion.
- Q4.22** A large crate is suspended from the end of a vertical rope. Is the tension in the rope greater when the crate is at rest or when it is moving upward at constant speed? If the crate is traveling upward, is the tension in the rope greater when the crate is speeding up or when it is slowing down? In each case, explain in terms of Newton's laws of motion.
- Q4.23** Which feels a greater pull due to the earth's gravity: a 10 kg stone or a 20 kg stone? If you drop the two stones, why doesn't the 20 kg stone fall with twice the acceleration of the 10 kg stone? Explain.
- Q4.24** A horse is hitched to a wagon. Since the wagon pulls back on the horse just as hard as the horse pulls on the wagon, why doesn't the wagon remain in equilibrium, no matter how hard the horse pulls?
- Q4.25** True or false? You exert a push  $P$  on an object and it pushes back on you with a force  $F$ . If the object is moving at constant velocity, then  $F$  is equal to  $P$ , but if the object is being accelerated, then  $P$  must be greater than  $F$ .
- Q4.26** A large truck and a small compact car have a head-on collision. During the collision, the truck exerts a force  $\vec{F}_{T \text{ on } C}$  on the car, and the car exerts a force  $\vec{F}_{C \text{ on } T}$  on the truck. Which force has the larger magnitude, or are they the same? Does your answer depend on how fast each vehicle was moving before the collision? Why or why not?
- Q4.27** When a car comes to a stop on a level road, what force causes it to slow down? When the car increases its speed on the same road, what force causes it to speed up? Explain.
- Q4.28** A small compact car is pushing a large van that has broken down, and they travel along the road with equal velocities and accelerations. While the car is speeding up, is the force it exerts on the van larger than, smaller than, or the same magnitude as the force the van exerts on it? Which vehicle has the larger net force on it, or are the net forces the same? Explain.
- Q4.29** Consider a tug-of-war between two people who pull in opposite directions on the ends of a rope. By Newton's third law, the force that  $A$  exerts on  $B$  is just as great as the force that  $B$  exerts on  $A$ . So what determines who wins? (*Hint*: Draw a free-body diagram showing all the forces that act on each person.)
- Q4.30** Boxes  $A$  and  $B$  are in contact on a horizontal, frictionless surface. You push on box  $A$  with a horizontal 100 N force (**Fig. Q4.31**). Box  $A$  weighs 150 N, and box  $B$  weighs 50 N. Is the force that box  $A$  exerts on box  $B$  equal to 100 N, greater than 100 N, or less than 100 N? Explain.
- Q4.31** A manual for student pilots contains this passage: “When an airplane flies at a steady altitude, neither climbing nor descending, the upward lift force from the wings equals the plane's weight. When the plane is climbing at a steady rate, the upward lift is greater than the weight; when the plane is descending at a steady rate, the upward lift is less than the weight.” Are these statements correct? Explain.
- Q4.32** If your hands are wet and no towel is handy, you can remove some of the excess water by shaking them. Why does this work?
- Q4.33** If you squat down (such as when you examine the books on a bottom shelf) and then suddenly get up, you may temporarily feel light-headed. What do Newton's laws of motion have to say about why this happens?
- Q4.34** When a car is hit from behind, the occupants may experience whiplash. Use Newton's laws of motion to explain what causes this result.
- Q4.35** In a head-on auto collision, passengers who are not wearing seat belts may be thrown through the windshield. Use Newton's laws of motion to explain why this happens.

Figure Q4.31



**Q4.36** In a head-on collision between a compact 1000 kg car and a large 2500 kg car, which one experiences the greater force? Explain. Which one experiences the greater acceleration? Explain why. Why are passengers in the small car more likely to be injured than those in the large car, even when the two car bodies are equally strong?

**Q4.37** Suppose you are in a rocket with no windows, traveling in deep space far from other objects. Without looking outside the rocket or making any contact with the outside world, explain how you could determine whether the rocket is (a) moving forward at a constant 80% of the speed of light and (b) accelerating in the forward direction.


**EXERCISES**

**Section 4.1 Force and Interactions**

**4.1** •• Two dogs pull horizontally on ropes attached to a post; the angle between the ropes is  $51.0^\circ$ . If Rover exerts a force of 288 N and Fido exerts a force of 324 N, find the magnitude of the resultant force and the angle it makes with Rover's rope.

**4.2** • To extricate an SUV stuck in the mud, workmen use three horizontal ropes, producing the force vectors shown in **Fig. E4.2**. (a) Find the  $x$ - and  $y$ -components of each of the three pulls. (b) Use the components to find the magnitude and direction of the resultant of the three pulls.

Figure E4.2



**4.3** • **BIO Jaw Injury.** Due to a jaw injury, a patient must wear a strap (**Fig. E4.3**) that produces a net upward force of 5.00 N on his chin. The tension is the same throughout the strap. To what tension must the strap be adjusted to provide the necessary upward force?

**4.4** • A man is dragging a trunk up the loading ramp of a mover's truck. The ramp has a slope angle of  $20.0^\circ$ , and the man pulls upward with a force  $\vec{F}$  whose direction makes an angle of  $30.0^\circ$  with the ramp (**Fig. E4.4**). (a) How large a force  $\vec{F}$  is necessary for the component  $F_x$  parallel to the ramp to be 90.0 N? (b) How large will the component  $F_y$  perpendicular to the ramp be then?

Figure E4.4





Figure E4.3



**4.5** • Forces  $\vec{F}_1$  and  $\vec{F}_2$  act at a point. The magnitude of  $\vec{F}_1$  is 8.00 N, and its direction is  $64.0^\circ$  above the  $x$ -axis in the second quadrant. The magnitude of  $\vec{F}_2$  is 5.40 N, and its direction is  $53.9^\circ$  below the  $x$ -axis in the third quadrant. (a) What are the  $x$ - and  $y$ -components of the resultant force? (b) What is the magnitude of the resultant force?

**Section 4.3 Newton's Second Law**

**4.6** • An electron (mass =  $9.11 \times 10^{-31}$  kg) leaves one end of a TV picture tube with zero initial speed and travels in a straight line to the accelerating grid, which is 1.80 cm away. It reaches the grid with a speed of  $3.00 \times 10^6$  m/s. If the accelerating force is constant, compute (a) the acceleration; (b) the time to reach the grid; and (c) the net force, in newtons. Ignore the gravitational force on the electron.

**4.7** •• A 68.5 kg skater moving initially at 2.40 m/s on rough horizontal ice comes to rest uniformly in 3.52 s due to friction from the ice. What force does friction exert on the skater?

**4.8** •• You walk into a lift, step onto a scale, and push the "up" button. You recall that your normal weight is 655 N. Draw a free-body diagram. (a) When the lift has an upward acceleration of magnitude  $2.46 \text{ m/s}^2$ , what does the scale read? (b) If you hold a 3.65-kg package by a light vertical string, what will be the tension in this string when the lift accelerates as in part (a)?

**4.9** • A box rests on a frozen pond, which serves as a frictionless horizontal surface. If a fisherman applies a horizontal force with magnitude 50.0 N to the box and produces an acceleration of magnitude  $3.60 \text{ m/s}^2$ , what is the mass of the box?


**4.10** •• A dockworker applies a constant horizontal force of 80.0 N to a block of ice on a smooth horizontal floor. The frictional force is negligible. The block starts from rest and moves 11.0 m in 5.00 s. (a) What is the mass of the block of ice? (b) If the worker stops pushing at the end of 5.00 s, how far does the block move in the next 5.00 s?

**4.11** • A hockey puck with mass 0.160 kg is at rest at the origin ( $x = 0$ ) on the horizontal, frictionless surface of the rink. At time  $t = 0$  a player applies a force of 0.250 N to the puck, parallel to the  $x$ -axis; she continues to apply this force until  $t = 2.00$  s. (a) What are the position and speed of the puck at  $t = 2.00$  s? (b) If the same force is again applied at  $t = 5.00$  s, what are the position and speed of the puck at  $t = 7.00$  s?

**4.12** • A crate with mass 32.0 kg initially at rest on a warehouse floor is acted on by a net horizontal force of 140 N. (a) What acceleration is produced? (b) How far does the crate travel in 13.0 s? (c) What is its speed at the end of 13.0 s?


**4.13** • A 4.50 kg experimental cart undergoes an acceleration in a straight line (the  $x$ -axis). The graph in **Fig. E4.13** shows this acceleration as a function of time. (a) Find the maximum net force on this cart. When does this maximum force occur? (b) During what times is the net force on the cart a constant? (c) When is the net force equal to zero?

Figure E4.13



**4.14** • A 3.89-kg cat moves in a straight line (the  $x$ -axis). **Figure E4.14** shows a graph of the  $x$ -component of this cat's velocity as a function of time. (a) Find the maximum net force on this cat. When does this force occur? (b) When is the net force on the cat equal to zero? (c) What is the net force at time 8.5 s?

Figure E4.14



**4.15 •** A small 5.00 kg rocket burns fuel that exerts a time-varying upward force on the rocket (assume constant mass) as the rocket moves upward from the launch pad. This force obeys the equation  $F = A + Bt^2$ . Measurements show that at  $t = 0$ , the force is 130.0 N, and at the end of the first 2.00 s, it is 152.0 N. (a) Find the constants  $A$  and  $B$ , including their SI units. (b) Find the *net* force on this rocket and its acceleration (i) the instant after the fuel ignites and (ii) 3.50 s after the fuel ignites. (c) Suppose that you were using this rocket in outer space, far from all gravity. What would its acceleration be 3.50 s after fuel ignition?

#### Section 4.4 Mass and Weight

**4.16 •** An astronaut's pack weighs 17.4 N when she is on the earth but only 3.95 N when she is at the surface of a moon. (a) What is the acceleration due to gravity on this moon? (b) What is the mass of the pack on this moon?

**4.17 •** Superman throws a 1650 N boulder at an adversary. What horizontal force must Superman apply to the boulder to give it a horizontal acceleration of  $13.6 \text{ m/s}^2$ ?

**4.18 • BIO** (a) An ordinary flea has a mass of  $215 \mu\text{g}$ . How many newtons does it weigh? (b) The mass of a typical frog hopper is 12.3 mg. How many newtons does it weigh? (c) A house cat typically weighs 43 N. What is its mass in kilograms?

**4.19 •** At the surface of Jupiter's moon Io, the acceleration due to gravity is  $g = 1.81 \text{ m/s}^2$ . A watermelon weighs 48.0 N at the surface of the earth. (a) What is the watermelon's mass on the earth's surface? (b) What would be its mass and weight on the surface of Io?

#### Section 4.5 Newton's Third Law

**4.20 •** Estimate the mass in kilograms and the weight of a typical sumo wrestler. How do your estimates for the wrestler compare to your estimates of the average mass and weight of the students in your physics class? Do a web search if necessary to help make the estimates. In your solution list what values you assume for the quantities you use in making your estimates.

**4.21 • BIO** World-class sprinters can accelerate out of the starting blocks with an acceleration that is nearly horizontal and has magnitude  $15 \text{ m/s}^2$ . How much horizontal force must a 45 kg sprinter exert on the starting blocks to produce this acceleration? Which body exerts the force that propels the sprinter: the blocks or the sprinter herself?


**4.22 •** A small car of mass 500 kg is pushing a large truck of mass 920 kg due east on a level road. The car exerts a horizontal force of 1490 N on the truck. What is the magnitude of the force that the truck exerts on the car?

**4.23 ••** Boxes  $A$  and  $B$  are in contact on a horizontal, frictionless surface (Fig. E4.23). Box  $A$  has mass 25.0 kg and box  $B$  has mass 8.0 kg. A horizontal force of 100 N is exerted on box  $A$ . What is the magnitude of the force that box  $A$  exerts on box  $B$ ?

**4.24 ••** The upward normal force exerted by the floor is 620 N on a lift passenger who weighs 650 N. What are the reaction forces to these two forces? Is the passenger accelerating? If so, what are the magnitude and direction of the acceleration?

**4.25 ••** A student of mass 45 kg jumps off a high diving board. What is the acceleration of the earth toward her as she accelerates toward the earth with an acceleration of  $9.8 \text{ m/s}^2$ ? Use  $6.0 \times 10^{24} \text{ kg}$  for the mass of the earth, and assume that the net force on the earth is the force of gravity she exerts on it.


Figure E4.23



#### Section 4.6 Free-Body Diagrams

**4.26 ••** You pull horizontally on block  $B$  in Fig. E4.26, causing both blocks to move together as a unit. For this moving system, make a carefully labeled free-body diagram of block  $A$  if (a) the table is frictionless and (b) there is friction between block  $B$  and the table and the pull is equal in magnitude to the friction force on block  $B$  due to the table.

Figure E4.26



**4.27 ••** Crates  $A$  and  $B$  sit at rest side by side on a frictionless horizontal surface. They have masses  $m_A$  and  $m_B$ , respectively. When a horizontal force  $\vec{F}$  is applied to crate  $A$ , the two crates move off to the right. (a) Draw clearly labeled free-body diagrams for crate  $A$  and for crate  $B$ . Indicate which pairs of forces, if any, are third-law action–reaction pairs. (b) If the magnitude of  $\vec{F}$  is less than the total weight of the two crates, will it cause the crates to move? Explain.

**4.28 •• CP** A .22 caliber rifle bullet traveling at 350 m/s strikes a large tree and penetrates it to a depth of 0.130 m. The mass of the bullet is 1.80 g. Assume a constant retarding force. (a) How much time is required for the bullet to stop? (b) What force, in newtons, does the tree exert on the bullet?

**4.29 •** A ball is hanging from a long string that is tied to the ceiling of a train car traveling eastward on horizontal tracks. An observer inside the train car sees the ball hang motionless. Draw a clearly labeled free-body diagram for the ball if (a) the train has a uniform velocity and (b) the train is speeding up uniformly. Is the net force on the ball zero in either case? Explain.

**4.30 ••** A chair of mass 13.5 kg is sitting on the horizontal floor; the floor is not frictionless. You push on the chair with a force  $F = 35.0 \text{ N}$  that is directed at an angle of  $38.0^\circ$  below the horizontal, and the chair slides along the floor. (a) Draw a clearly labeled free-body diagram for the chair. (b) Use your diagram and Newton's laws to calculate the normal force that the floor exerts on the chair.

#### PROBLEMS

**4.31 •• CP** Estimate the average force that a major-league pitcher exerts on the baseball when he throws a fastball. In your solution, list the quantities for which you estimate values and any assumptions you make. Do a web search to help determine the values you use in making your estimates.


**4.32 •• CP** You have just landed on Planet X. You release a 100 g ball from rest from a height of 13.5 m and measure that it takes 2.10 s to reach the ground. Ignore any force on the ball from the atmosphere of the planet. How much does the 100 g ball weigh on the surface of Planet X?

**4.33 •• CP** A 4.40 kg bucket of water is accelerated upward by a cord of negligible mass whose breaking strength is 74.0 N. If the bucket starts from rest, what is the minimum time required to raise the bucket a vertical distance of 14.0 m without breaking the cord?

**4.34 ••** Block  $A$  rests on top of block  $B$  as shown in Fig. E4.26. The table is frictionless but there is friction (a horizontal force) between blocks  $A$  and  $B$ . Block  $B$  has mass 6.00 kg and block  $A$  has mass 2.00 kg. If the horizontal pull applied to block  $B$  equals 12.0 N, then block  $B$  has an acceleration of  $1.80 \text{ m/s}^2$ . What is the acceleration of block  $A$ ?

**4.35 ••** Two adults and a child want to push a wheeled cart in the direction marked  $x$  in Fig. P4.35 (next page). The two adults push with horizontal forces  $\vec{F}_1$  and  $\vec{F}_2$  as shown. (a) Find the magnitude and direction of the *smallest* force that the child should exert. Ignore the effects of friction. (b) If the child exerts the minimum force found in part (a), the cart accelerates at  $2.0 \text{ m/s}^2$  in the  $+x$ -direction. What is the weight of the cart?


Figure P4.35



**4.36 ••• CP** An advertisement claims that a particular automobile can “stop on a dime.” What net force would be necessary to stop a 840-kg automobile traveling initially at 37.0 km/h in a distance equal to the diameter of a dime, 1.8 cm?

**4.37 •** Two crates, one with mass 4.00 kg and the other with mass 6.00 kg, sit on the frictionless surface of a frozen pond, connected by a light rope (Fig. P4.37). A woman wearing golf shoes (for traction) pulls horizontally on the 6.00 kg crate with a force  $F$  that gives the crate an acceleration of  $2.90 \text{ m/s}^2$ . (a) What is the acceleration of the 4.00 kg crate? (b) Draw a free-body diagram for the 4.00 kg crate. Use that diagram and Newton's second law to find the tension  $T$  in the rope that connects the two crates. (c) Draw a free-body diagram for the 6.00 kg crate. What is the direction of the net force on the 6.00 kg crate? Which is larger in magnitude,  $T$  or  $F$ ? (d) Use part (c) and Newton's second law to calculate the magnitude of  $F$ .

FIGURE P4.37

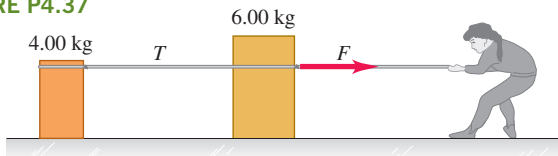

**4.38 •• CP** Two blocks connected by a light horizontal rope sit at rest on a horizontal, frictionless surface. Block A has mass 15.0 kg, and block B has mass  $m$ . A constant horizontal force  $F = 60.0 \text{ N}$  is applied to block A (Fig. P4.38). In the first 5.00 s after the force is applied, block A moves 18.0 m to the right. (a) While the blocks are moving, what is the tension  $T$  in the rope that connects the two blocks? (b) What is the mass of block B?

Figure P4.38



**4.39 • CALC** To study damage to aircraft that collide with large birds, you design a test gun that will accelerate chicken-sized objects so that their displacement along the gun barrel is given by  $x = (9.0 \times 10^3 \text{ m/s}^2)t^2 - (8.0 \times 10^4 \text{ m/s}^3)t^3$ . The object leaves the end of the barrel at  $t = 0.025 \text{ s}$ . (a) How long must the gun barrel be? (b) What will be the speed of the objects as they leave the end of the barrel? (c) What net force must be exerted on a 1.50 kg object at (i)  $t = 0$  and (ii)  $t = 0.025 \text{ s}$ ?

**4.40 •• CP** On a test flight a rocket with mass 400 kg blasts off from the surface of the earth. The rocket engines apply a constant upward force  $F$  until the rocket reaches a height of 100 m and then they shut off. If the rocket is to reach a maximum height of 400 m above the surface of the earth, what value of  $F$  is required? Assume the change in the rocket's mass is negligible.

**4.41 •• CP** After an annual checkup, you leave your physician's office, where you weighed 683 N. You then get into a lift that, conveniently, has a scale. Find the magnitude and direction of the lift's acceleration if the scale reads (a) 725 N and (b) 595 N.

**4.42 •** A loaded lift with very worn cables has a total mass of 2100 kg, and the cables can withstand a maximum tension of 29,000 N. (a) Draw the free-body force diagram for the lift. In terms of the forces on your diagram, what is the net force on the lift? Apply Newton's second law to the lift and find the maximum upward acceleration for the lift if the cables are not to break. (b) What would be the answer to part (a) if the lift were on the moon, where  $g = 1.62 \text{ m/s}^2$ ?

**4.43 •• CP** A batter swings at a baseball (mass 0.145 kg) that is moving horizontally toward him at a speed of 40.0 m/s. He hits the ball in such a way that it moves away from him horizontally at 50.0 m/s just after it leaves the bat. If the bat and ball are in contact for 8.00 ms, what is the average force that the bat applies to the ball?

**4.44 •• CP CALC** An object with mass  $m$  is moving along the  $x$ -axis according to the equation  $x(t) = \alpha t^2 - 2\beta t$ , where  $\alpha$  and  $\beta$  are positive constants. What is the magnitude of the net force on the object at time  $t = 0$ ?


**4.45 •• CP** Boxes A and B are connected to each end of a light vertical rope (Fig. P4.45). A constant upward force  $F = 80.0 \text{ N}$  is applied to box A. Starting from rest, box B descends 12.0 m in 4.00 s. The tension in the rope connecting the two boxes is 36.0 N. What are the masses of (a) box B, (b) box A?

**4.46 ••** The two blocks in Fig. P4.46 are connected by a heavy uniform rope with a mass of 4.00 kg. An upward force of 200 N is applied as shown. (a) Draw three free-body diagrams: one for the 6.00 kg block, one for the 4.00 kg rope, and another one for the 5.00 kg block. For each force, indicate what object exerts that force. (b) What is the acceleration of the system? (c) What is the tension at the top of the heavy rope? (d) What is the tension at the midpoint of the rope?

Figure P4.45



Figure P4.46

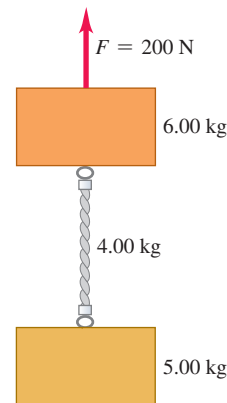

**4.47 ••• CP** A small rocket with mass 20.0 kg is moving in free fall toward the earth. Air resistance can be neglected. When the rocket is 80.0 m above the surface of the earth, it is moving downward with a speed of 30.0 m/s. At that instant the rocket engines start to fire and produce a constant upward force  $F$  on the rocket. Assume the change in the rocket's mass is negligible. What is the value of  $F$  if the rocket's speed becomes zero just as it reaches the surface of the earth, for a soft landing? (Hint: The net force on the rocket is the combination of the upward force  $F$  from the engines and the downward weight of the rocket.)

**4.48 •• CP Extraterrestrial Physics.** You have landed on an unknown planet, Newtonia, and want to know what objects weigh there. When you push a certain tool, starting from rest, on a frictionless horizontal surface with a 12.0 N force, the tool moves 16.0 m in the first 2.00 s. You next observe that if you release this tool from rest at 10.0 m above the ground, it takes 2.58 s to reach the ground. What does the tool weigh on Newtonia, and what does it weigh on earth?

**4.49 •• CP CALC** A mysterious rocket-propelled object of mass 49.5 kg is initially at rest in the middle of the horizontal, frictionless surface of an ice-covered lake. Then a force directed east and with magnitude  $F(t) = (15.5 \text{ N/s})t$  is applied. How far does the object travel in the first 4.25 s after the force is applied?

**4.50 •• CP** Starting at time  $t = 0$ , net force  $F_1$  is applied to an object that is initially at rest. (a) If the force remains constant with magnitude  $F_1$  while the object moves a distance  $d$ , the final speed of the object is  $v_1$ . What is the final speed  $v_2$  (in terms of  $v_1$ ) if the net force is  $F_2 = 2F_1$  and the object moves the same distance  $d$  while the force is being applied? (b) If the force  $F_1$  remains constant while it is applied for a time  $T$ , the final speed of the object is  $v_1$ . What is the final speed  $v_2$  (in terms of  $v_1$ ) if the applied force is  $F_2 = 2F_1$  and is constant while it is applied for the same time  $T$ ? In a later chapter we'll call force times distance work and force times time impulse and associate work and impulse with the change in speed.)

**4.51 •• DATA** The table\* gives automobile performance data for a few types of cars:

Make and Model (Year)	Mass (kg)	Time (s) to go from 0 to 100 km/h
Alpha Romeo 4C (2013)	895	4.5
Honda Civic 2.0i (2011)	1320	6.6
Ferrari F430 (2004)	1435	4.0
Ford Focus RS500 (2010)	1468	5.6
Volvo S60 (2013)	1650	7.4

\*Source: www.autosnout.com

(a) During an acceleration of 0 to 100 km/h, which car has the largest average net force acting on it? The smallest? (b) During this acceleration, for which car would the average net force on a 72.0 kg passenger be the largest? The smallest? (c) When the Ferrari F430 accelerates from 0 to 200 km/h in 12.2 s, what is the average net force acting on it? How does this net force compare with the average net force during the acceleration from 0 to 100 km/h? Explain why these average net forces might differ. (d) Discuss why a car has a top speed. What is the net force on the Ferrari F430 when it is traveling at its top speed, 315.4 km/h?

**4.52 ••• CALC** The position of a training helicopter (weight  $2.75 \times 10^5 \text{ N}$ ) in a test is given by  $\vec{r} = (0.020 \text{ m/s}^3)t^3\hat{i} + (2.2 \text{ m/s})t\hat{j} - (0.060 \text{ m/s}^2)t^2\hat{k}$ . Find the net force on the helicopter at  $t = 5.0 \text{ s}$ .

**4.53 •• DATA** You are a Starfleet captain going boldly where no one has gone before. You land on a distant planet and visit an engineering testing lab. In one experiment a short, light rope is attached to the top of a block and a constant upward force  $F$  is applied to the free end of the rope. The block has mass  $m$  and is initially at rest. As  $F$  is varied, the time for the block to move upward 8.00 m is measured. The values that you collected are given in the table:

$F$ (N)	Time (s)
250	3.3
300	2.2
350	1.7
400	1.5
450	1.3
500	1.2

(a) Plot  $F$  versus the acceleration  $a$  of the block. (b) Use your graph to determine the mass  $m$  of the block and the acceleration of gravity  $g$  at the surface of the planet. Note that even on that planet, measured values contain some experimental error.

**4.54 •• DATA** An 8.00 kg box sits on a level floor. You give the box a sharp push and find that it travels 8.22 m in 2.8 s before coming to rest again. (a) You measure that with a different push the box traveled 4.20 m in 2.0 s. Do you think the box has a constant acceleration as it slows down? Explain your reasoning. (b) You add books to the box to increase its mass. Repeating the experiment, you give the box a push and measure how long it takes the box to come to rest and how far the box travels. The results, including the initial experiment with no added mass, are given in the table:

Added Mass (kg)	Distance (m)	Time (s)
0	8.22	2.8
3.00	10.75	3.2
7.00	9.45	3.0
12.0	7.10	2.6

In each case, did your push give the box the same initial speed? What is the ratio between the greatest initial speed and the smallest initial speed for these four cases? (c) Is the average horizontal force  $f$  exerted on the box by the floor the same in each case? Graph the magnitude of force  $f$  versus the total mass  $m$  of the box plus its contents, and use your graph to determine an equation for  $f$  as a function of  $m$ .

## CHALLENGE PROBLEMS

**4.55 ••• CP CALC** A block of mass 2.00 kg is initially at rest at  $x = 0$  on a slippery horizontal surface for which there is no friction. Starting at time  $t = 0$ , a horizontal force  $F_x(t) = \beta - \alpha t$  is applied to the block, where  $\alpha = 6.00 \text{ N/s}$  and  $\beta = 4.00 \text{ N}$ . (a) What is the largest positive value of  $x$  reached by the block? How long does it take the block to reach this point, starting from  $t = 0$ , and what is the magnitude of the force when the block is at this value of  $x$ ? (b) How long from  $t = 0$  does it take the block to return to  $x = 0$ , and what is its speed at this point?

**4.56 ••• CALC** An object of mass  $m$  is at rest in equilibrium at the origin. At  $t = 0$  a new force  $\vec{F}(t)$  is applied that has components

$$F_x(t) = k_1 + k_2y \quad F_y(t) = k_3t$$

where  $k_1$ ,  $k_2$ , and  $k_3$  are constants. Calculate the position  $\vec{r}(t)$  and velocity  $\vec{v}(t)$  vectors as functions of time.

## MCAT-STYLE PASSAGE PROBLEMS

**BIO Forces on a Dancer's Body.** Dancers experience large forces associated with the jumps they make. For example, when a dancer lands after a vertical jump, the force exerted on the head by the neck must exceed the head's weight by enough to cause the head to slow down and come to rest. The head is about 9.4% of a typical person's mass. Video analysis of a 65 kg dancer landing after a vertical jump shows that her head decelerates from 4.0 m/s to rest in a time of 0.20 s.


**4.57** What is the magnitude of the average force that her neck exerts on her head during the landing? (a) 0 N; (b) 60 N; (c) 120 N; (d) 180 N.

**4.58** Compared with the force her neck exerts on her head during the landing, the force her head exerts on her neck is (a) the same; (b) greater; (c) smaller; (d) greater during the first half of the landing and smaller during the second half of the landing.

**4.59** While the dancer is in the air and holding a fixed pose, what is the magnitude of the force her neck exerts on her head? (a) 0 N; (b) 60 N; (c) 120 N; (d) 180 N.

**4.60** The forces on a dancer can be measured directly when a dancer performs a jump on a force plate that measures the force between her feet and the ground. A graph of force versus time throughout a vertical jump performed on a force plate is shown in **Fig. P4.60**. What is happening at 0.4 s? The dancer is (a) bending her legs so that her body is accelerating downward; (b) pushing her body up with her legs and is almost ready to leave the ground; (c) in the air and at the top of her jump; (d) landing and her feet have just touched the ground.

Figure P4.60

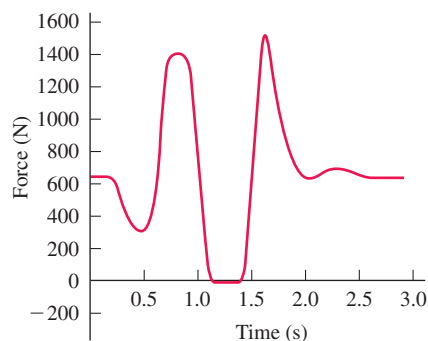

## ANSWERS

### Chapter Opening Question ?

(v) Newton's third law tells us that the barbell pushes on the weightlifter just as hard as the weightlifter pushes on the barbell in *all* circumstances, no matter how the barbell is moving. However, the magnitude of the force that the weightlifter exerts is different in different circumstances. This force magnitude is equal to the weight of the barbell when the barbell is stationary, moving upward at a constant speed, or moving downward at a constant speed; it is greater than the weight of the barbell when the barbell accelerates upward; and it is less than the weight of the barbell when the barbell accelerates downward. But in each case the push of the barbell on the weightlifter has exactly the same magnitude as the push of the weightlifter on the barbell.

### Key Example VARIATION Problems

**VP4.1.1**  $\sum F_x = 88.0 \text{ N}$ ,  $\sum F_y = -44.0 \text{ N}$ ,  $F = 98.4 \text{ N}$ , angle =  $26.6^\circ$  clockwise from the  $+x$ -direction

**VP4.1.2**  $\sum F_x = -143 \text{ N}$ ,  $\sum F_y = 246 \text{ N}$ ,  $F = 285 \text{ N}$ , angle =  $120^\circ$  counterclockwise from the  $+x$ -direction

**VP4.1.3**  $\sum F_x = 6.4 \text{ N}$ ,  $\sum F_y = 1.5 \text{ N}$ ,  $F = 6.6 \text{ N}$ , angle =  $13^\circ$  counterclockwise from the  $+x$ -direction

**VP4.1.4**  $F_{\text{Tsureku}, x} = -55.8 \text{ N}$ ,  $F_{\text{Tsureku}, y} = -62.0 \text{ N}$ , magnitude  $F_{\text{Tsureku}} = 83.4 \text{ N}$ , angle =  $48.0^\circ$  south of west

**VP4.4.1**  $0.45 \text{ m/s}^2$

**VP4.4.2** (a) normal force, exerted by the floor; weight or gravitational force, exerted by the earth; horizontal force, exerted by your hand  
(b)  $0.25 \text{ m/s}^2$

**VP4.4.3** (a) 12 N (b) equal

**VP4.4.4** (a) 9.60 N (b) 4.4 N, in the direction opposite to your push

**VP4.5.1** 40.0 N

**VP4.5.2**  $1.65 \times 10^3 \text{ m}$

**VP4.5.3** (a) 3.84 s (b)  $6.51 \text{ m/s}^2$  (c)  $1.56 \times 10^4 \text{ N}$

**VP4.5.4** (a) gravity (the earth), normal force (the road), friction (the road), push (you and your friends) (b) 575 N

### Bridging Problem

(a) See the Video Tutor Solution in Mastering Physics.

(b) (i)  $2.20 \text{ m/s}^2$ ; (ii) 6.00 N; (iii) 3.00 N



**?** Each of the seeds being blown off the head of a dandelion (genus *Taraxacum*) has a feathery structure called a pappus. The pappus acts like a parachute and enables the seed to be borne by the wind and drift gently to the ground. If a seed with its pappus descends straight down at a steady speed, which force acting on the seed has a greater magnitude? (i) The force of gravity; (ii) the upward force exerted by the air; (iii) both forces have the same magnitude; (iv) it depends on the speed at which the seed descends.

# 5 Applying Newton's Laws

We saw in Chapter 4 that Newton's three laws of motion, the foundation of classical mechanics, can be stated very simply. But *applying* these laws to situations such as an iceboat skating across a frozen lake, a toboggan sliding down a hill, or an airplane making a steep turn requires analytical skills and problem-solving technique. In this chapter we'll help you extend the problem-solving skills you began to develop in Chapter 4.

We'll begin with equilibrium problems, in which we analyze the forces that act on an object that is at rest or moving with constant velocity. We'll then consider objects that are not in equilibrium. For these we'll have to take account of the relationship between forces and acceleration. We'll learn how to describe and analyze the contact force that acts on an object when it rests on or slides over a surface. We'll also analyze the forces that act on an object that moves in a circle with constant speed. We close the chapter with a brief look at the fundamental nature of force and the classes of forces found in our physical universe.

## 5.1 USING NEWTON'S FIRST LAW: PARTICLES IN EQUILIBRIUM

We learned in Chapter 4 that an object is in *equilibrium* when it is at rest or moving with constant velocity in an inertial frame of reference. A hanging lamp, a kitchen table, an airplane flying straight and level at a constant speed—all are examples of objects in equilibrium. In this section we consider only the equilibrium of an object that can be modeled as a particle. (In Chapter 11 we'll see how to analyze an object in equilibrium that can't be represented adequately as a particle, such as a bridge that's supported at various points along its span.) The essential physical principle is Newton's first law:

Newton's first law: Net force on an object ...  $\sum \vec{F} = 0$  ... must be zero for an object in equilibrium.

Sum of x-components of force on object must be zero.  $\sum F_x = 0$       Sum of y-components of force on object must be zero.  $\sum F_y = 0$       (5.1)

### LEARNING OUTCOMES

*In this chapter, you'll learn...*

- 5.1 How to use Newton's first law to solve problems involving the forces that act on an object in equilibrium.
- 5.2 How to use Newton's second law to solve problems involving the forces that act on an accelerating object.
- 5.3 The nature of the different types of friction forces—static friction, kinetic friction, rolling friction, and fluid resistance—and how to solve problems that involve these forces.
- 5.4 How to solve problems involving the forces that act on an object moving along a circular path.
- 5.5 The key properties of the four fundamental forces of nature.

*You'll need to review...*

- 1.8 Determining the components of a vector from its magnitude and direction.
- 2.4 Straight-line motion with constant acceleration.
- 3.3 Projectile motion.
- 3.4 Uniform and nonuniform circular motion.
- 4.1 Superposition of forces.
- 4.2 Newton's first law.
- 4.3 Newton's second law.
- 4.4 Mass and weight.
- 4.5 Newton's third law.

This section is about using Newton's first law to solve problems dealing with objects in equilibrium. Some of these problems may seem complicated, but remember that *all* problems involving particles in equilibrium are done in the same way. Problem-Solving Strategy 5.1 details the steps you need to follow for any and all such problems. Study this strategy carefully, look at how it's applied in the worked-out examples, and try to apply it when you solve assigned problems.

### PROBLEM-SOLVING STRATEGY 5.1 Newton's First Law: Equilibrium of a Particle

**IDENTIFY** *the relevant concepts:* You must use Newton's *first* law, Eqs. (5.1), for any problem that involves forces acting on an object in equilibrium—that is, either at rest or moving with constant velocity. A car is in equilibrium when it's parked, but also when it's traveling down a straight road at a steady speed.

If the problem involves more than one object and the objects interact with each other, you'll also need to use Newton's *third* law. This law allows you to relate the force that one object exerts on a second object to the force that the second object exerts on the first one.

Identify the target variable(s). Common target variables in equilibrium problems include the magnitude and direction (angle) of one of the forces, or the components of a force.

**SET UP** *the problem* by using the following steps:

1. Draw a very simple sketch of the physical situation, showing dimensions and angles. You don't have to be an artist!
2. Draw a free-body diagram for each object that is in equilibrium. For now, we consider the object as a particle, so you can represent it as a large dot. In your free-body diagram, *do not* include the other objects that interact with it, such as a surface it may be resting on or a rope pulling on it.
3. Ask yourself what is interacting with the object by contact or in any other way. On your free-body diagram, draw a force vector for each interaction. Label each force with a symbol for the *magnitude* of the force. If you know the angle at which a force is directed, draw the angle accurately and label it. Include the object's weight, unless the object has negligible mass. If the mass is given, use  $w = mg$  to find the weight. A surface in contact with the object exerts a normal force perpendicular to the surface and possibly a friction force parallel to the surface. A rope or chain exerts a pull (never a push) in a direction along its length.

4. *Do not* show in the free-body diagram any forces exerted *by* the object on any other object. The sums in Eqs. (5.1) include only forces that act *on* the object. For each force on the object, ask yourself "What other object causes that force?" If you can't answer that question, you may be imagining a force that isn't there.
5. Choose a set of coordinate axes and include them in your free-body diagram. (If there is more than one object in the problem, choose axes for each object separately.) Label the positive direction for each axis. If an object rests or slides on a plane surface, for simplicity choose axes that are parallel and perpendicular to this surface, even when the plane is tilted.

**EXECUTE** *the solution* as follows:

1. Find the components of each force along each of the object's coordinate axes. Draw a wiggly line through each force vector that has been replaced by its components, so you don't count it twice. The *magnitude* of a force is always positive, but its *components* may be positive or negative.
2. Set the sum of all  $x$ -components of force equal to zero. In a separate equation, set the sum of all  $y$ -components equal to zero. (*Never* add  $x$ - and  $y$ -components in a single equation.)
3. If there are two or more objects, repeat all of the above steps for each object. If the objects interact with each other, use Newton's third law to relate the forces they exert on each other.
4. Make sure that you have as many independent equations as the number of unknown quantities. Then solve these equations to obtain the target variables.

**EVALUATE** *your answer:* Look at your results and ask whether they make sense. When the result is a symbolic expression or formula, check to see that your formula works for any special cases (particular values or extreme cases for the various quantities) for which you can guess what the results ought to be.

### EXAMPLE 5.1 One-dimensional equilibrium: Tension in a massless rope

A gymnast with mass  $m_G = 50.0$  kg suspends herself from the lower end of a hanging rope of negligible mass. The upper end of the rope is attached to the gymnasium ceiling. (a) What is the gymnast's weight? (b) What force (magnitude and direction) does the rope exert on her? (c) What is the tension at the top of the rope?

**IDENTIFY and SET UP** The gymnast and the rope are in equilibrium, so we can apply Newton's first law to both objects. We'll use Newton's third law to relate the forces that they exert on each other. The target variables are the gymnast's weight,  $w_G$ ; the force that the bottom of the rope exerts on the gymnast (call it  $T_{R \text{ on } G}$ ); and the force that the ceiling exerts on the top of the rope (call it  $T_{C \text{ on } R}$ ). **Figure 5.1** shows our sketch of the situation and free-body diagrams for the gymnast and for the rope. We take the positive  $y$ -axis to be upward in each

Figure 5.1 Our sketches for this problem.

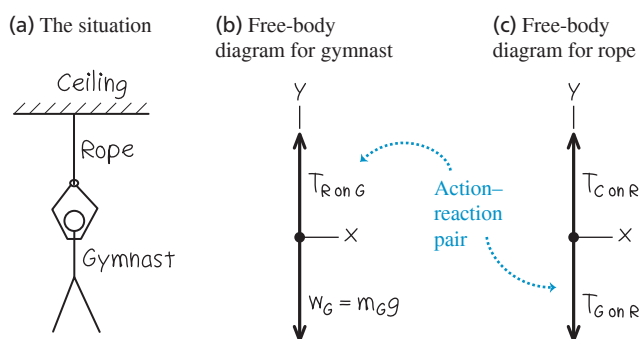




diagram. Each force acts in the vertical direction and so has only a  $y$ -component.

The forces  $T_{R \text{ on } G}$  (the upward force of the rope on the gymnast, Fig. 5.1b) and  $T_{G \text{ on } R}$  (the downward force of the gymnast on the rope, Fig. 5.1c) form an action–reaction pair. By Newton's third law, they must have the same magnitude.

Note that Fig. 5.1c includes only the forces that act *on* the rope. In particular, it doesn't include the force that the *rope* exerts on the *ceiling* (compare the discussion of the apple in Conceptual Example 4.9 in Section 4.5).

**EXECUTE** (a) The magnitude of the gymnast's weight is the product of her mass and the acceleration due to gravity,  $g$ :

$$w_G = m_G g = (50.0 \text{ kg})(9.80 \text{ m/s}^2) = 490 \text{ N}$$

(b) The gravitational force on the gymnast (her weight) points in the negative  $y$ -direction, so its  $y$ -component is  $-w_G$ . The upward force of the rope on the gymnast has unknown magnitude  $T_{R \text{ on } G}$  and positive  $y$ -component  $+T_{R \text{ on } G}$ . We find this by using Newton's first law from Eqs. (5.1):

$$\begin{aligned} \text{Gymnast: } \quad \sum F_y &= T_{R \text{ on } G} + (-w_G) = 0 \quad \text{so} \\ T_{R \text{ on } G} &= w_G = 490 \text{ N} \end{aligned}$$

The rope pulls *up* on the gymnast with a force  $T_{R \text{ on } G}$  of magnitude 490 N. (By Newton's third law, the gymnast pulls *down* on the rope with a force of the same magnitude,  $T_{G \text{ on } R} = 490 \text{ N}$ .)

(c) We have assumed that the rope is weightless, so the only forces on it are those exerted by the ceiling (upward force of unknown magnitude  $T_{C \text{ on } R}$ ) and by the gymnast (downward force of magnitude  $T_{G \text{ on } R} = 490 \text{ N}$ ). From Newton's first law, the *net* vertical force on the rope in equilibrium must be zero:

$$\begin{aligned} \text{Rope: } \quad \sum F_y &= T_{C \text{ on } R} + (-T_{G \text{ on } R}) = 0 \quad \text{so} \\ T_{C \text{ on } R} &= T_{G \text{ on } R} = 490 \text{ N} \end{aligned}$$

**EVALUATE** The *tension* at any point in the rope is the magnitude of the force that acts at that point. For this weightless rope, the tension  $T_{G \text{ on } R}$  at the lower end has the same value as the tension  $T_{C \text{ on } R}$  at the upper end. For such an ideal weightless rope, the tension has the same value at any point along the rope's length. (See the discussion in Conceptual Example 4.10 in Section 4.5.)

**KEYCONCEPT** The sum of all the external forces on an object in equilibrium is zero. The tension has the same value at either end of a rope or string of negligible mass.

### EXAMPLE 5.2 One-dimensional equilibrium: Tension in a rope with mass

Find the tension at each end of the rope in Example 5.1 if the weight of the rope is 120 N.

**IDENTIFY and SET UP** As in Example 5.1, the target variables are the magnitudes  $T_{G \text{ on } R}$  and  $T_{C \text{ on } R}$  of the forces that act at the bottom and top of the rope, respectively. Once again, we'll apply Newton's first law to the gymnast and to the rope, and use Newton's third law to relate the forces that the gymnast and rope exert on each other. Again we draw separate free-body diagrams for the gymnast (Fig. 5.2a) and the rope (Fig. 5.2b). There is now a *third* force acting on the rope, however: the weight of the rope, of magnitude  $w_R = 120 \text{ N}$ .

**EXECUTE** The gymnast's free-body diagram is the same as in Example 5.1, so her equilibrium condition is also the same. From Newton's third law,  $T_{R \text{ on } G} = T_{G \text{ on } R}$ , and we again have

$$\begin{aligned} \text{Gymnast: } \quad \sum F_y &= T_{R \text{ on } G} + (-w_G) = 0 \quad \text{so} \\ T_{R \text{ on } G} &= T_{G \text{ on } R} = w_G = 490 \text{ N} \end{aligned}$$

The equilibrium condition  $\sum F_y = 0$  for the rope is now


$$\text{Rope: } \quad \sum F_y = T_{C \text{ on } R} + (-T_{G \text{ on } R}) + (-w_R) = 0$$

Note that the  $y$ -component of  $T_{C \text{ on } R}$  is positive because it points in the  $+y$ -direction, but the  $y$ -components of both  $T_{G \text{ on } R}$  and  $w_R$  are negative. We solve for  $T_{C \text{ on } R}$  and substitute the values  $T_{G \text{ on } R} = T_{R \text{ on } G} = 490 \text{ N}$  and  $w_R = 120 \text{ N}$ :

$$T_{C \text{ on } R} = T_{G \text{ on } R} + w_R = 490 \text{ N} + 120 \text{ N} = 610 \text{ N}$$

**EVALUATE** When we include the weight of the rope, the tension is *different* at the rope's two ends: 610 N at the top and 490 N at the bottom. The force  $T_{C \text{ on } R} = 610 \text{ N}$  exerted by the ceiling has to hold up both the 490 N weight of the gymnast and the 120 N weight of the rope.

Figure 5.2 Our sketches for this problem, including the weight of the rope.

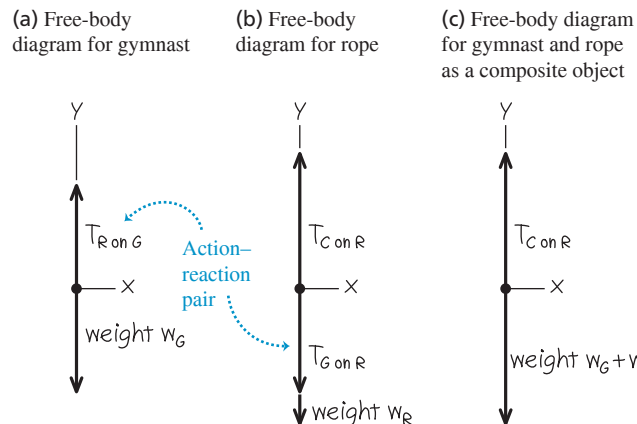

To see this more clearly, we draw a free-body diagram for a composite object consisting of the gymnast and rope together (Fig. 5.2c). Only two external forces act on this composite object: the force  $T_{C \text{ on } R}$  exerted by the ceiling and the total weight  $w_G + w_R = 490 \text{ N} + 120 \text{ N} = 610 \text{ N}$ . (The forces  $T_{G \text{ on } R}$  and  $T_{R \text{ on } G}$  are *internal* to the composite object. Newton's first law applies only to *external* forces, so these internal forces play no role.) Hence Newton's first law applied to this composite object is

$$\text{Composite object: } \quad \sum F_y = T_{C \text{ on } R} + [-(w_G + w_R)] = 0$$

and so  $T_{C \text{ on } R} = w_G + w_R = 610 \text{ N}$ .

Treating the gymnast and rope as a composite object is simpler, but we can't find the tension  $T_{G \text{ on } R}$  at the bottom of the rope by this method.

**KEYCONCEPT** If there's more than one object in a problem that involves Newton's laws, the safest approach is to treat each object separately.

**EXAMPLE 5.3 Two-dimensional equilibrium**

In **Fig. 5.3a**, a car engine with weight  $w$  hangs from a chain that is linked at ring  $O$  to two other chains, one fastened to the ceiling and the other to the wall. Find expressions for the tension in each of the three chains in terms of  $w$ . The weights of the ring and chains are negligible compared with the weight of the engine.

**IDENTIFY and SET UP** The target variables are the tension magnitudes  $T_1$ ,  $T_2$ , and  $T_3$  in the three chains (**Fig. 5.3a**). All the objects are in equilibrium, so we'll use Newton's first law. We need three independent equations, one for each target variable. However, applying Newton's first law in component form to just one object gives only *two* equations [the  $x$ - and  $y$ -equations in Eqs. (5.1)]. So we'll have to consider more than one object in equilibrium. We'll look at the engine (which is acted on by  $T_1$ ) and the ring (which is attached to all three chains and so is acted on by all three tensions).

Figures 5.3b and 5.3c show our free-body diagrams and choice of coordinate axes. Two forces act on the engine: its weight  $w$  and the upward force  $T_1$  exerted by the vertical chain. Three forces act on the ring: the tensions from the vertical chain ( $T_1$ ), the horizontal chain ( $T_2$ ), and the slanted chain ( $T_3$ ). Because the vertical chain has negligible weight, it exerts forces of the same magnitude  $T_1$  at both of its ends (see **Example 5.1**). (If the weight of this chain were not negligible, these two forces would have different magnitudes; see **Example 5.2**.) The weight of the ring is also negligible, so it isn't included in **Fig. 5.3c**.

**EXECUTE** The forces acting on the engine are along the  $y$ -axis only, so Newton's first law [Eqs. (5.1)] says

$$\text{Engine: } \Sigma F_y = T_1 + (-w) = 0 \quad \text{and} \quad T_1 = w$$

The horizontal and slanted chains don't exert forces on the engine itself because they are not attached to it. These forces do appear when

we apply Newton's first law to the ring, however. In the free-body diagram for the ring (**Fig. 5.3c**), remember that  $T_1$ ,  $T_2$ , and  $T_3$  are the *magnitudes* of the forces. We resolve the force with magnitude  $T_3$  into its  $x$ - and  $y$ -components. Applying Newton's first law in component form to the ring gives us the two equations

$$\text{Ring: } \Sigma F_x = T_3 \cos 60^\circ + (-T_2) = 0$$

$$\text{Ring: } \Sigma F_y = T_3 \sin 60^\circ + (-T_1) = 0$$

Because  $T_1 = w$  (from the engine equation), we can rewrite the second ring equation as

$$T_3 = \frac{T_1}{\sin 60^\circ} = \frac{w}{\sin 60^\circ} = 1.2w$$

We can now use this result in the first ring equation:

$$T_2 = T_3 \cos 60^\circ = w \frac{\cos 60^\circ}{\sin 60^\circ} = 0.58w$$


**EVALUATE** The chain attached to the ceiling exerts a force on the ring with a *vertical* component equal to  $T_1$ , which in turn is equal to  $w$ . But this force also has a horizontal component, so its magnitude  $T_3$  is somewhat greater than  $w$ . This chain is under the greatest tension and is the one most susceptible to breaking.

To get enough equations to solve this problem, we had to consider not only the forces on the engine but also the forces acting on a second object (the ring connecting the chains). Situations like this are fairly common in equilibrium problems, so keep this technique in mind.

**KEYCONCEPT** In two-dimensional problems that involve forces, always write *two* force equations for each object: one for the  $x$ -components of the forces and one for the  $y$ -components of the forces.

**Figure 5.3** Our sketches for this problem. Note that with our choice of axes, all but one of the forces lie along either the  $x$ -axis or the  $y$ -axis.


(a) Engine, chains, and ring

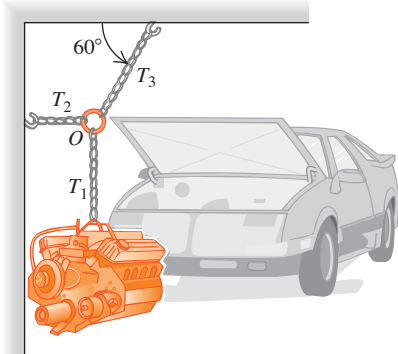

(b) Free-body diagram for engine



(c) Free-body diagram for ring O

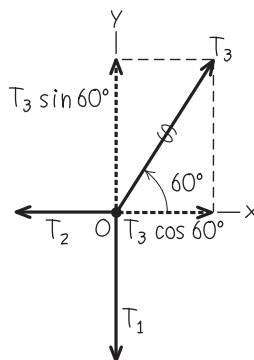**EXAMPLE 5.4 An inclined plane**

A car of weight  $w$  rests on a slanted ramp attached to a trailer (**Fig. 5.4a**). Only a cable running from the trailer to the car prevents the car from rolling off the ramp. (The car's brakes are off and its transmission is in neutral.) Find the tension in the cable and the force that the ramp exerts on the car's tires.

**IDENTIFY** The car is in equilibrium, so we use Newton's first law. The ramp exerts a separate force on each of the car's tires, but for simplicity we lump these forces into a single force. For a further simplification,

we'll neglect any friction force the ramp exerts on the tires (see **Fig. 4.2b**). Hence the ramp exerts only a force on the car that is *perpendicular* to the ramp. As in **Section 4.1**, we call this force the *normal* force (see **Fig. 4.2a**). The two target variables are the magnitude  $T$  of the tension in the cable and the magnitude  $n$  of the normal force.

**SET UP** **Figure 5.4** shows the three forces acting on the car: its weight (magnitude  $w$ ), the tension in the cable (magnitude  $T$ ), and the normal force (magnitude  $n$ ). Note that the angle  $\alpha$  between the ramp and the